

Key Features & Benefits:

- Extremely Quick Installation:
 - No rewiring necessary
 - No tombstones
 - Does not require access into ceiling plenum or extra junction boxes for installation
 - Quick Connect technology
- Available Kits:
 - 3 Ti Retrofit Plate for parabolic and lensed troffers
 - 2 Ti Retrofit Plate for lensed troffers
- 36 Total Available Configurations
 - 2,938 to 9,360 lumens
 - 3000K, 3500K, 4000K, and 5000K available in Ti Series
 - 4000K and 5000K available in TiHO Series
- Material
 - Single piece design with pre-drilled holes allowing quick and easy installation
 - Die-formed and embossed code 22 gauge steel
 - High reflectance, baked white enamel finish
- Long Life
 - 10 year warranty (12 hour run times)
 - 7 year warranty (24 hour run times)
- Control Options
 - Photocell
 - Occupancy
- Emergency Capable



Project: _____ Date: _____

Catalog #: _____

Notes: _____



Technical Data:

Light Specifications:

Lumen Output: Up to 5,040 Lumens
 Efficacy (lm/W): Up to 112 Lumens per Watt
 Kelvin: 3000K, 3500K, 4000K, 5000K
 Color Rendering Index (CRI): >82
 Rated Life: > 80,000 hrs

Driver Data:

Input Voltage: 120-277 VAC
 Driver Output: Triple Output
 Output Power: 45 Watts
 Dimming: 0-10v
 Input Current @ 120V: 0.375 Amps
 Input Current @ 240V: 0.188 Amps
 Input Current @ 277V: 0.162 Amps
 Total Harmonic Distortion (THD): <10%
 Operating Temperature: -4 ~ 122°F

Catalog Data:

ITEM#	WATTS	TOTAL KIT LUMENS	EFFICACY (lm/W)	KELVIN
ESL-Ti-PK24-S-45W-3L-F30	45W	4,905	109	3000K
ESL-Ti-PK24-S-45W-3L-F35	45W	4,950	110	3500K
ESL-Ti-PK24-S-45W-3L-F40	45W	4,995	111	4000K
ESL-Ti-PK24-S-45W-3L-F50	45W	5,040	112	5000K

Ordering Guide:

ESL	Ti	PK24	S	45W	3L	F		
ESL	TYPE	SERIES	CLASS	WATTS	Ti	LENS	KELVIN	OPTIONS
	Ti Series	PK24 (2'x4' Plate Kit)	S	39W (39 Watts) 45W (45 Watts) 54W (54 Watts) 66W (66 Watts)	3L (Three Ti)	F (Frosted)	30 (3000 Kelvin) 35 (3500 Kelvin) 40 (4000 Kelvin) 50 (5000 Kelvin)	

Alternate 2'x4' Ti Plate Kit Options:



2L Output


Options (Add as Suffix):

- ESL-EMG-FDC-30W (Emergency Back Up, DC, 30 Watt)
- ESL-4OCC (Occupancy Sensor, 0-10v Dimming, 20' Max. Mounting)
- ESL-REM-101 (Hand Held Remote to Program ESL-2OCC, ESL-4OCC, ESL-5OCC)


What's Included:

- (1) Retrofit Plate
- (3) LED Ti Bar
- (1) LED Driver
- (6) Ti Mounting Clips
- (4) Self Tapping Screws
- (1) UL1598C Certification Label

Dimensions:

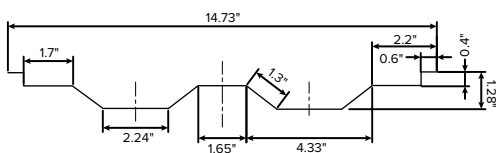

Side View

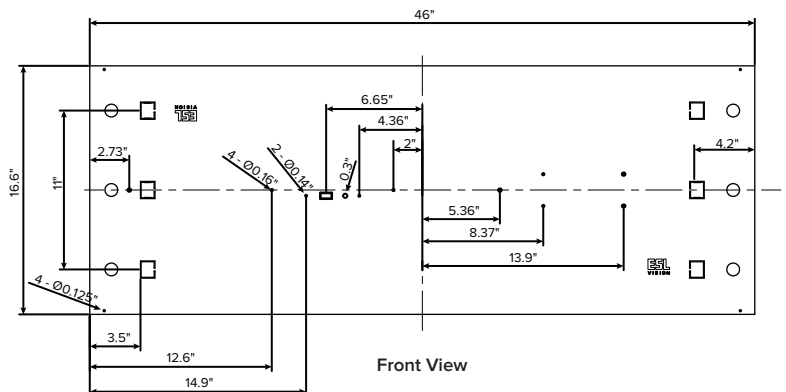

Front View