

### Key Features & Benefits:

- Ultra-thin Profile
- MV Models are 120-277 VAC with 1-10v Dimming
- IC Rated
- Kelvin Adjustability - 3000K, 4000K or 5000K
- Simple, Quick Connect Installation to Provided J-box
- Field Installable Bezel Finishes:
  - Black, oil rubbed bronze, copper and brushed nickel

Project: \_\_\_\_\_

Date: \_\_\_\_\_

Catalog #: \_\_\_\_\_

Notes: \_\_\_\_\_



**KELVIN  
TUNEABLE**  
3000K • 4000K • 5000K



### Technical Data:

Power: 11 Watts  
 Lumen Output: Up to 750 Lumens  
 Kelvin: 3000K, 4000K, 5000K  
 CRI: >80  
 THD: 15%  
 Power Factor: >0.9  
 Rated Life (hrs): 50,000  
 Beam Angle: 120°

**- 120V**  
 Input Voltage: 120 VAC  
 Dimming: Triac Dimmable  
**- MV (120-277V)**  
 Input Voltage: 120-277 VAC  
 Dimming: 1-10v Dimmable



### Ordering Guide:

<b>ESL</b>	<b>-</b>	<b>WFR</b>	<b>-</b>	<b>4</b>	<b>-</b>	<b>11W</b>	<b>-</b>	<b>1</b>	<b>-</b>	<b>KA</b>	<b>-</b>	<b>1</b>	
ESL		TYPE		SIZE		WATTS		GENERATION		KELVIN		VOLTAGE	OPTIONS
		WFR		4 (4 inch)		11W		1 (1st Generation)		KA (Kelvin Adjustable)		120V (120 VAC Only) MV (120-277 VAC)	


### Options & Accessories

ESL-EMG-1AC-16W (AC Emergency, 16W Output, 16W MAX Input, 170 VDC, 90 min backup, 120-277 VAC, Field & Factory Listed)
ESL-WFR-4-TBK (4" Field Installable Black Trim Kit)
ESL-WFR-4-TBZ (4" Field Installable Oil Rubbed Bronze Trim Kit)
ESL-WFR-4-TBN (4" Field Installable Brush Nickel Trim Kit)
ESL-WFR-4-TCP (4" Field Installable Copper Trim Kit)

**Catalog Data:**

ITEM#	WATTS	LUMEN OUTPUT	ADJUSTABLE KELVIN	INPUT VOLTAGE
ESL-WFR-4-11W-1KA-120V	11W	750	3000K - 4000K - 5000K	120 VAC
ESL-WFR-4-11W-1KA-MV	11W	750	3000K - 4000K - 5000K	120-277 VAC

**Product Dimensions:**

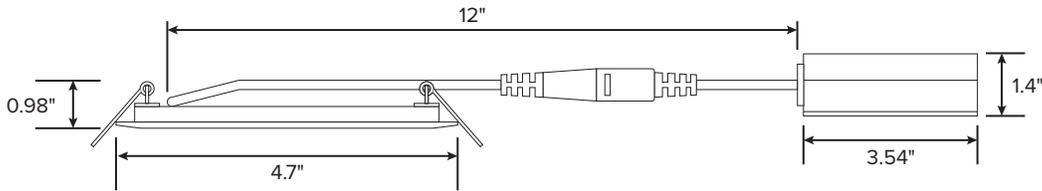

**Installation:**

