

Key Features & Benefits:

- Kelvin Selectable
- Wattage Selectable
- Beam Angle Selectable
- Multiple Mounting Options in the Box:
 - Slip Fitter
 - Yoke Mount
- Built In On/Off Photocell
- Durable Die-Cast Housing

Product Specifications:

Selectable Wattage: 75W–100W–125W–150W
 Selectable Kelvin: 3000K–4000K–5000K
 Selectable Beam Angle: 55°–75°–90°
 Lumens: Up to 22,500
 Efficacy: Up to 150 lm/W
 Input Voltage: 120–277 VAC
 Input Frequency: 50/60 Hz
 Dimming: 0–10V Dim to Off
 Operating Temperature: -40°F to 122°F (-40°C to 50°C)
 CRI: >80
 Warranty: 5 Years
 L70 Lifetime Calculated per TM21: 165,000 hrs
 Dimensions (LxWxH): 11.2" x 7.3" x 7.0"
 Weight (lbs): 9.92

Project:

Date:

Catalog #:

Notes:



Ordering Guide:

ESL	-	TYPE	-	SELECTABLE WATTAGE	-	GENERATION	-	SELECTABLE KELVIN	-	FINISH
ESL	-	FLD	-	75150W	-	2	-	3050	-	BZ
		(FLD) Flood Light		(1020W) 10W–13W–17W–20W (3060W) 30W–40W–50W–60W (75150W) 75W–100W–125W–150W (200320W) 200W–240W–280W–320W (380500W) 380W–420W–450W–500W		(2) 2nd Gen		(3050) 3000K–4000K–5000K		(BZ) Bronze (WH) White*

* White Finish is only available for 1020W and 3060W models




Catalog Data:

ITEM#	SELECTABLE WATTAGE	SELECTABLE KELVIN	SELECTABLE BEAM ANGLE	MAX LUMEN OUTPUT	MAX EFFICACY (lm/w)	FINISH	DIMENSIONS (LxWxH)	DLC QPL CODE
ESL-FLD-1020W-23050-XX	10W–13W–17W–20W	3000K–4000K–5000K	55°–75°–90°	3,000	150	(BZ) Bronze (WH) White*	6.3" x 5.2" x 2.7"	S-TNN3BJ
ESL-FLD-3060W-23050-XX	30W–40W–50W–60W			9,000	150	(BZ) Bronze (WH) White*	7.8" x 7.2" x 3.4"	S-V4GN06
ESL-FLD-75150W-23050-BZ	75W–100W–125W–150W			22,500	150	(BZ) Bronze	11.2" x 7.3" x 7.0"	S-9WZW4H
ESL-FLD-200320W-23050-BZ	200W–240W–280W–320W			48,000	150	(BZ) Bronze	16.63" x 10.3" x 8.5"	S-QJTT5K
ESL-FLD-380500W-23050-BZ	380W–420W–450W–500W			75,000	150	(BZ) Bronze	19.5" x 14.19" x 9.69"	S-82Y0KQ


* White Finish is only available for 1020W and 3060W models

Dimensions:


ESL-FLD-1020W-23050-XX

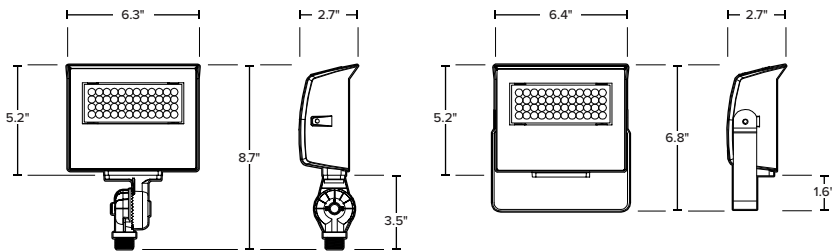

ESL-FLD-3060W-23050-XX

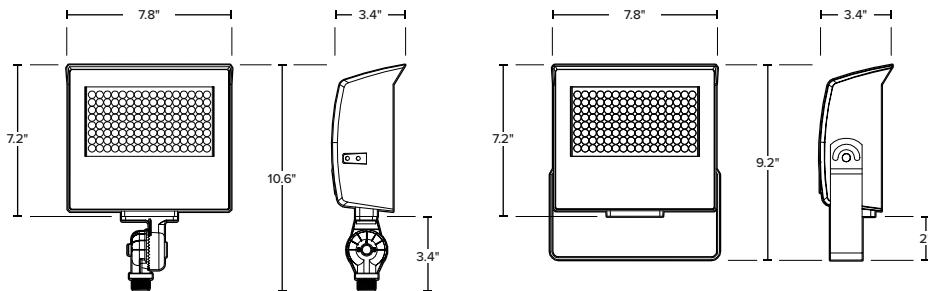


ESL-FLD-75150W-23050-BZ

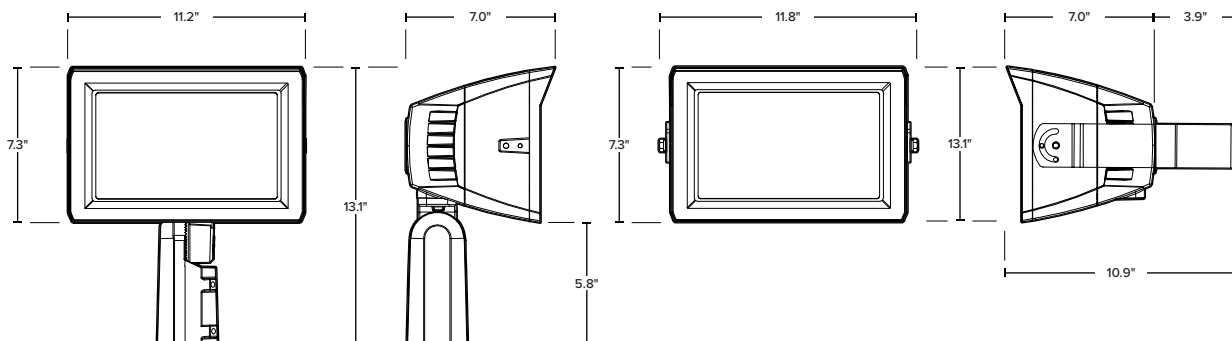


Dimensions:

ESL-FLD-200320W-23050-BZ

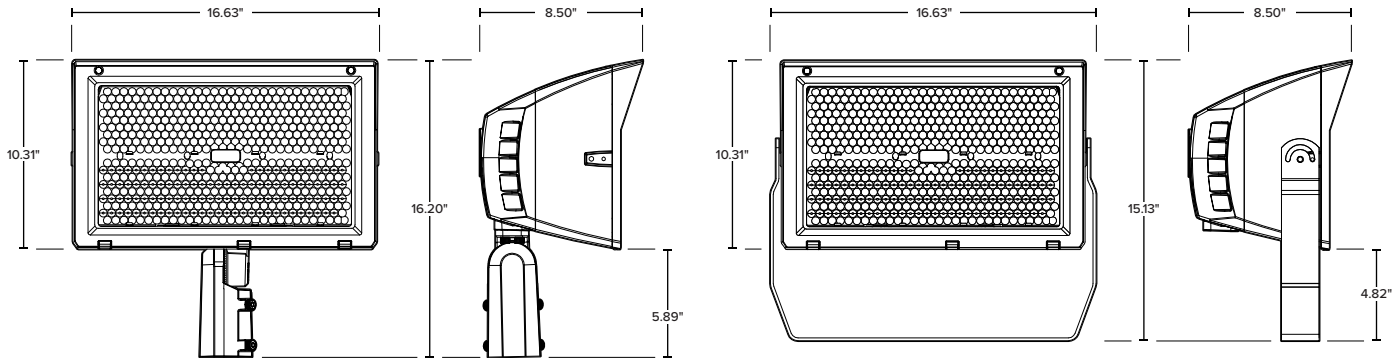


ESL-FLD-380500W-23050-BZ

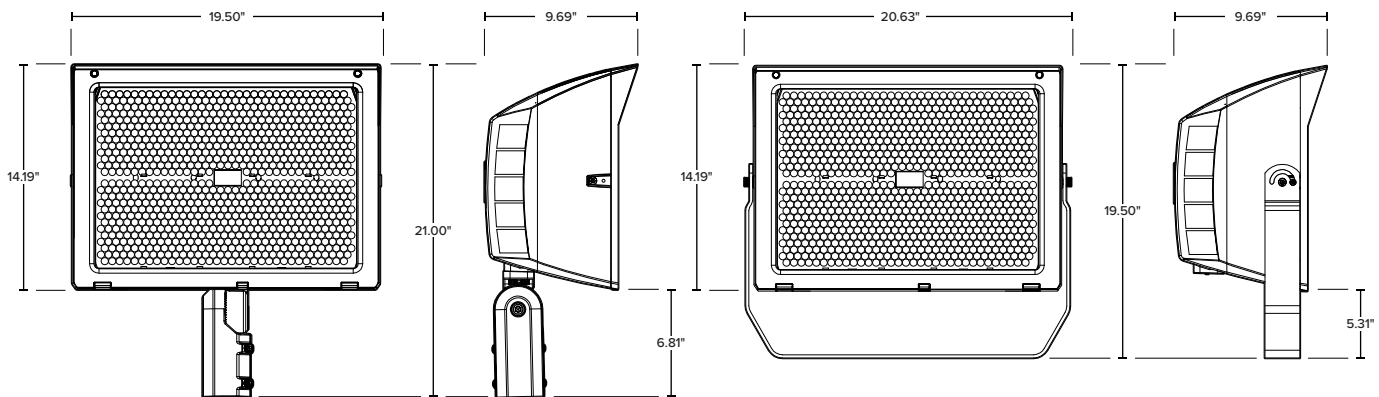


Mount Dimensions:

MOUNTS INCLUDED WITH ESL-FLD-1020W-23050-XX & ESL-FLD-3060W-23050-XX

Knuckle Mount




Trunnion Mount

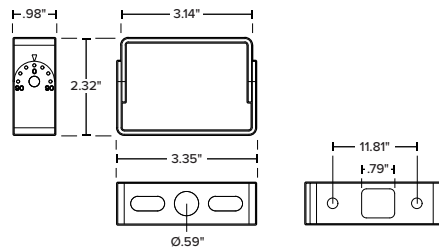


Mount Dimensions:

MOUNTS INCLUDED WITH ESL-FLD-75150W-23050-BZ

Slip Fitter Mount

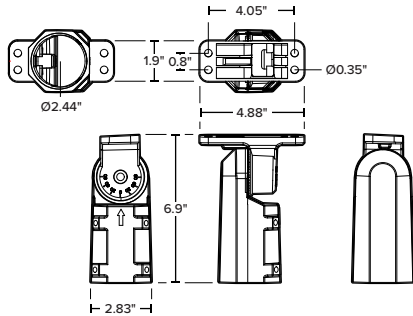


Yoke Mount




MOUNTS INCLUDED WITH ESL-FLD-75150W-23050-BZ

Slip Fitter Mount

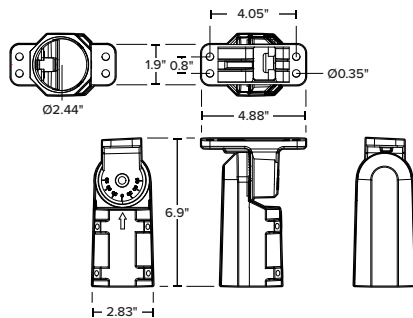


Yoke Mount



MOUNTS INCLUDED WITH ESL-FLD-75150W-23050-BZ

Slip Fitter Mount

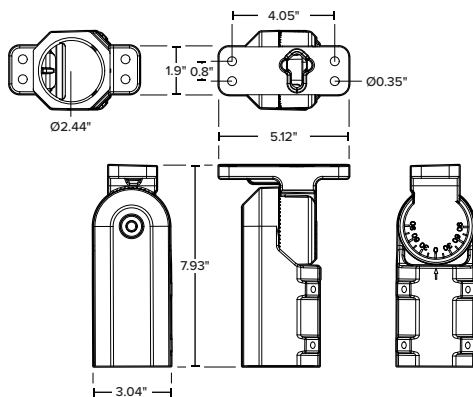

Yoke Mount

