

Performance Overview:

Wattage: 12 Watts
 Lumen Output: Up to 1,932 Lumens
 Efficacy (lm/W): Up to 161 Lumens
 Kelvin: 3000K, 3500K, 4000K, 5000K
 CRI: >80

Project: _____ Date: _____


Catalog #: _____

Notes: _____



Key Features & Benefits:

- Up to 161 Lumens per Watt
- Glass Construction with Shatterproof Coating
- > 220° Beam Spread
- Double Ended or Single Ended Wiring
- Integral Driver (Isolated)



Ordering Guide:

ESL	-	T8	-	GLV	-	12W	-	F	-	2	-	
ESL		TUBE		TYPE		WATTS		LENS		GENERATION		KELVIN
				GLV (Glass Line Voltage)		12W		F (Frosted)		2 (2nd Generation)		30 (3000 Kelvin) 35 (3500 Kelvin) 40 (4000 Kelvin) 50 (5000 Kelvin)


†Not All Part Numbers DLC Qualified. For a Complete Listing Please Consult the DLC Qualified Products List (QPL).

Product Specifications:


- Wattage: 12 Watts
- Power Factor: >0.9
- Input Voltage: 120-240 VAC
 - Input Current @120V: 0.1 Amps
 - Input Current @240V: 0.05 Amps
- Operating Temperature: -4°F to 113°F (-20°C to 45°C)
- Material: Glass with PET Coating
- Life Span: 50,000 Hours
- Base Type: G13
- Tube Dimensions (ØxL): 1" x 47.75"
- Tube Weight (lbs): 0.4 lbs

GLV Wire Diagrams (Type B):

Before Upgrade:

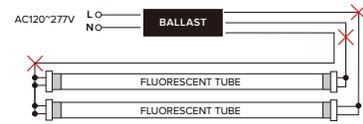

After Upgrade:



Catalog Data:

ITEM#	WATTS	LUMEN OUTPUT	EFFICACY (lm/W)	KELVIN	DLC QPL CODE
ESL-T8-GLV-12W-F230	12W	1,764	147	3000K	PUQFMK81
ESL-T8-GLV-12W-F235	12W	1,871	145	3500K	PTGT9J95
ESL-T8-GLV-12W-F240	12W	1,884	155	4000K	PVHCQ8HG
ESL-T8-GLV-12W-F250	12W	1,932	161	5000K	PK1AQXX2