



LED GLV SERIES


Eight Foot - 36 Watts

Performance Overview:

Wattage: 36 Watts
 Lumen Output: Up to 5,645 Lumens
 Efficacy (lm/W): Up to 157 Lumens
 Kelvin: 4000K, 5000K
 CRI: >80




Project: _____ Date: _____
 Catalog #: _____
 Notes: _____

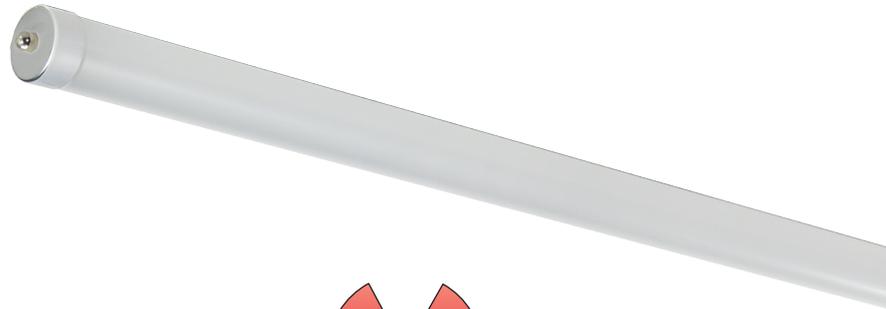

Key Features & Benefits:

- Up to 150 Lumens per Watt
- Glass Construction with Shatterproof Coating
- Wide Beam Angle
- Double Ended or Single Ended Wiring
- Integral Driver (Isolated)

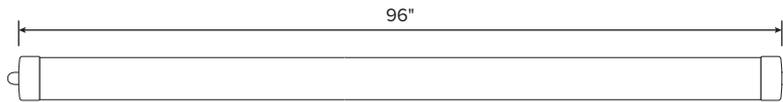

Ordering Guide:

ESL	-	T8	-	GLV8	-	36W	-	F		3	
ESL		TUBE		TYPE		WATTS		LENS		GENERATION	
				GLV8 (8ft Glass Line Voltage)		36W		F (Frosted)		3 (3rd Generation)	
											40 (4000 Kelvin) 50 (5000 Kelvin)

Options & Accessories (Order Separately)

Clips:
ESL-ACCS-CCLIP (C-shape support Clip for Tubes)

Ordering Information:

Package Quantity: 10 tubes and 10 c-shape support clips



LED GLV SERIES


Eight Foot - 36 Watts

Product Specifications:


- Wattage: 36 Watts
- Power Factor: >0.9
- Input Voltage: 120-277 VAC
 - Input Current @120V: 0.30 Amps
 - Input Current @208V: 0.17 Amps
 - Input Current @240V: 0.15 Amps
 - Input Current @277V: 0.13 Amps
- Input Frequency: 50/60Hz
- Operating Temperature: -4°F to 122°F (-20°C to 50°C)
- Material: Glass
- THD: <20%
- Life Span: 50,000 Hours
- Base Type: Fa8
- Tube Dimensions (ØxL): 1" x 96"

GLV Wire Diagrams (Type B):

Before Upgrade:

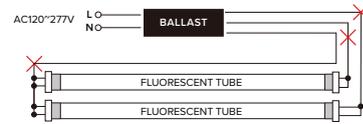

After Upgrade:

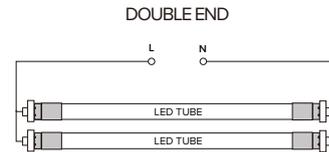

Catalog Data:

ITEM#	WATTS	LUMEN OUTPUT	EFFICACY (lm/W)	KELVIN
ESL-T8-GLV8-36W-F340	36W	5,635	157	4000K
ESL-T8-GLV8-36W-F350	36W	5,645	157	5000K