

18" CLOSET LIGHT

WITH PULL CHAIN | 1478 lm | 93 LPW | 4000K

KEY FEATURES

ETi's 18" Closet Light with Pull Chain is ENERGY STAR® rated and delivers 1478 lumens of extremely uniform ambient 4000K illumination.

- Sleek and modern flush mount wall light with white durable PC diffuser/lens
- At only 4.2" high, it fit's nicely above most door spaces
- · On/Off pull chain
- · 121,000 hours (L70 projected)

SPECIFICATIONS

Construction

- Sleek, modern LED luminaire
- Pull Chain

Light Quality

· 4000K, 80+ CRI

Optics

- · PC diffuser lens for zero pixelation and overall visual comfort
- · Uniform, even light distribution

Installation

- · Fixture can be mounted to ceiling or wall
- Fixture plate, diffuser shade, wire connectors, mounting screws and 36" string included in package

Electrical

- Life: reported 86.14% lumen maintenance @ 54,000 hours and projected L70 @ 121,000 hours.
- Operates at 120V, 50/60 Hz
- Operating temperature: -15°C (-4°F) to 45°C (113°F)
- Non-Dimmable
- * Always consult dimmer manufacturer for proper use, installation and compatibility (some dimmers may require a neutral in the wall box).

Warranty

5-Year Standard Warranty. See terms at: ETiSSL.com/warranty/



Certifications & Test Data

- $\cdot\,$ All luminaires are built to UL 1598 standards and have the appropriate
- UL labels and information on product.
- Damp location rated
- $\cdot~{\rm ENERGY}~{\rm STAR}^{\scriptscriptstyle (\! 8\!)}$ rated (See Page 2 for search info.)
- · IC Rated for direct contact with insulation
- Driver rated for FCC part 15 Class B for use in residential or commercial applications
- Suitable for use in closets when installed in accordance to NEC Section 410.16 (A)(1) and 410.16 (C)(1)





Lumen

Wattage Efficacy (LPW)

Reported Life (Hours)

ETi Solid State Lighting 720 Northgate Parkway, Wheeling, IL 60090 | TEL: 1.855.384.7754 E-mail: etiorders@ETiSSL.com | ETiSSL.com

L70 / 121,000

1478 15 9


93

KEY DATA

All specifications are subject to change without notice. All reported values are typical values, measured under laboratory conditions @ 25° C (77° F). Actual performance can vary slightly as a result of end-user application & environment.

DATE:	PROJECT:
TYPE:	NOTES:
CATALOG #:	

CATALOG LOGIC



Notes:

1. This product is not configurable, Only designated 'Stock' SKUs are available.


STOCK ORDERING INFORMATION (typical 2-3 day shipment lead time)¹

Catalog Part Number	Order Number	Description		Lumen Package	Delivered Lumens ²	Wattage (Nominal)	Efficacy	сст	CRI	Voltage	Dim	ENERGY STAR [®]
CS-18-12-840-SV	53603142	18" Closet Light with Pull Chain	2	1200	1478	16	93	4000K	80 (min)	120V	Non- Dim	Yes, Search: 536031##

Notes: 1. Stock SKUs typically ship in 24-48 hours upon receipt of an approved released order

2. For more delivered lumens and test data on below, or visit ETiSSL.com

DIMENSIONS / DETAILS

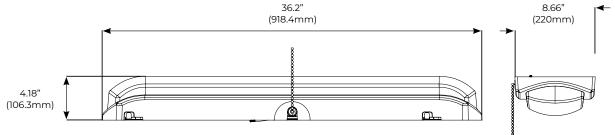

Unit Weight 1.5 lbs.

PERFORMANCE / DATA

Lumen Maintenance

Ambient Temp.	TM-21 Lumen Maintenance (54,000 hours)
25° C (77° F)	> 86.14%
Ambient Temp.	TM-21 Theoretical L70 (hours)
25° C (77° F)	121.000

Load Information

Power Factor	.90
THD	< 20%
Frequency	50/60 Hz
Sound Rating	< 20 dBA
Low Temp Start / Max Temp	-15° C (-4° F) / 45° C (113° F)

PHOTOMETRIC SAMPLE

ີ	Luminaire Data:					
Ĵ	CCT & CPI	40				

CCT & CRI	4000K, 80+ CRI		
Delivered Lumens	1478		
Wattage	15.9W		
Efficacy	92.9		
Beam Angle	50% = 118.40 10% = 174.20		
Spacing	0° = 1.30 90° = 1.28		

Photometric values based on tests performed in compliance with LM-63 & LM-79

