


13" LOWPRO WHITE DECORATIVE  
FLUSHMOUNT WITH NIGHTLIGHT

MODEL# 56576111 | 1,792 LUMENS | 16.3 W | 109.9 LPW | 3 CCT

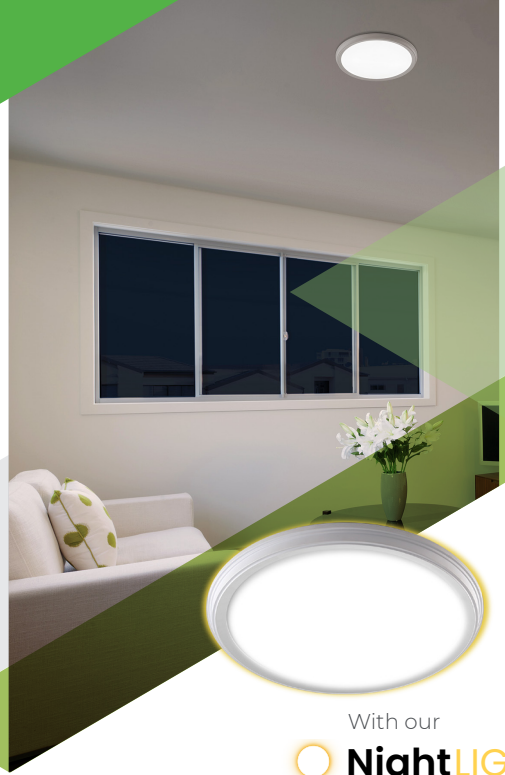

With our  
**NightLIGHTR**  
trim

13" LOWPRO WHITE DECORATIVE FLUSHMOUNT WITH NIGHTLIGHT  
**SUPERIOR VALUE & PERFORMANCE**



**PRODUCT OVERVIEW**

ETI SSL's 13" LowPro White Decorative Flushmount with Nightlight is a contemporary alternative to your traditional ceiling light or recessed lights. It is designed for easy installation by using the existing junction box or a canless drywall opening; using ETI's optional remodel box accessory. Prior to installation, choose between three light output options: soft white, bright white, or daylight simply by toggling the switch located on the back of the fixture. The integrated accent/nightlight delivers an extra-soft amber glow to add accent lighting in any room. Toggle the wall switch from on/off/on, within a 3 second window, to change from the area light and accent/nightlight.

The 13" White Decorative Flushmount emits 1,792 Lumens of brightness using only 16.3 Watts of electricity, thus reducing energy consumption. This unit is ideal for kitchen, pantry, bedrooms, bathrooms, closets, stairways, hallways, basement, laundry room, craft room, playroom, office, retail store, boutique and more due to its damp location rating and its sleek design.

Our entire team takes great pride in our dedication to providing innovative in-stock lighting solutions that typically ship in 2-3 days with the product reliability and quality that you can always depend on from ETI SSL.

**STOCK ORDERING INFORMATION** (typical 2-3 day shipment lead time)<sup>1</sup>

Catalog Logic/PT#	Model #	UPC	Size	Lumens	Wattage	LPW	CCT <sup>2</sup>	CRI	Voltage	Dimming	Energy Star <sup>3</sup>
FMNL-13IN-1350LM-8-CP3-SV-TD-WT	56576111	849489065090	13"	1,792	16.3	109.9	3 CCT	80 (min)	120	Triac Dimming	Yes

Notes:

1. Stock SKUs typically ship in 24-48 hours upon receipt of an approved released order.
2. Offers three Color Preference® options: 3000K, 4000K & 5000K (factory set 3000k).
3. Search first 6-digits of the model # followed by '##' on the ENERGY STAR® website database...(Ex: '56576###') to view certifications.

# FM Series

13" LowPro White Decorative Flushmount with Nightlight

Model# 56576111 | 1,792 Lumens | 16.3 W | 109.9 LPW | 3 CCT | ENERGY STAR® | 5-yr Warranty

## CATALOG LOGIC | PART# DECODER<sup>1,2</sup>

### FMNL-13IN-1350LM-8-CP3-SV-TD-WT (Model # 56576111)


<b>FMNL</b>	<b>13</b>	<b>1350</b>	<b>8</b>	<b>CP3</b>	<b>SV</b>	<b>TD</b>	<b>WT</b>
Series	Size	Nominal Lumens	CRI	CCT	Voltage	Dimming	Color
<b>FMNL</b> Flushmount Nightlight	<b>13IN</b> 13" Diameter	<b>1350LM</b> 1350 Lumens	<b>8</b> 80CRI (minimum)	<b>CP3</b> 3000K 4000K 5000K	<b>SV</b> 120V	<b>TD</b> Triac Dimming	<b>WT</b> White

**Notes:**

1. This product is not configurable, only designated 'Stock' SKUs are available.

2. Decoder is to help clarify Catalog Logic|Part # configurations only (see Stock Ordering Information for available SKUs).

## KEY DIMENSIONAL INFORMATION

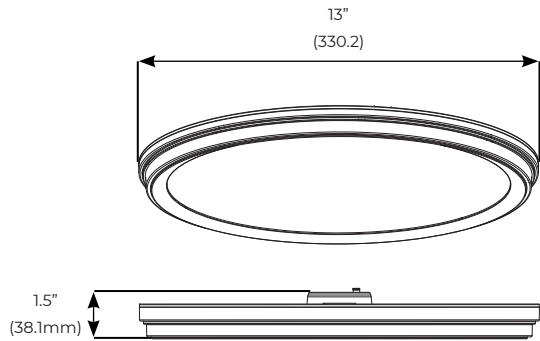

Note: All dimensions are shown in inches (millimeters).

## MISCELLANEOUS PRODUCT SPECS & DETAILS

### Load Information

<b>Power Factor</b>	>0.9
<b>THD</b>	< 20%
<b>Frequency</b>	60 Hz
<b>Sound Rating</b>	< 20 Dba
<b>Low Temp Start</b>	-20° C (-4° F)
<b>Max Temp</b>	45° C (113° F)
<b>Unit Weight</b>	2.3 lbs

### Lumen Maintenance

<b>Ambient Temperature</b>	<b>TM-21 Lumen Maintenance (50,000 hours)</b>
25° C (77° F)	> <b>89.34%</b>
<b>Ambient Temperature</b>	<b>TM-21 Theoretical L70 (hours)</b>
25° C (77° F)	<b>155,000</b>

### Shipping Information\*

<b>Size</b>	<b>Unit Weight<sup>1</sup></b>	<b>Pallet<sup>2</sup></b>
13" unit	2.3 lbs	216 units per pallet

1. Case pack weighs 9.2 lbs (4 units / per case pack).

2. There are 54 case packs per pallet.

## AVAILABLE STOCK ACCESSORIES

(must be ordered separately)



### Optional Installation Accessories (field installed)

Catalog Logic/PT#	Model #	Description
FLDL-RETROFITKIT	95657811101	Torsion Spring w/ E26 Adapter Kit



### Emergency LED Driver/BBU (field installed)

Catalog Logic/PT#	Model #	Description
EMA25FY-170 (G2)	70112202	25W, IP rated, 90 minutes, Square
EMA25FY-170 (G3)	70112202-2	25W, IP rated, 90 minutes, Square
EMA40FY-170 (G3)	70114402-2	40W, IP rated, 90 minutes, Square
EMUFO-25170-YY (G3)	70112201-2	25W, IP rated, 90 minutes, Round
EMUFO-40170-YY (G2)	70114401	40W, IP rated, 90 minutes, Round
EMUFO-40170-YY (G3)	70114401-2	40W, IP rated, 90 minutes, Round

## PHOTOMETRIC DETAILS


### Luminaire Data:

FMNL-13IN-1350LM-8-CP3-SV-TD-WT

IES File Name	<b>56576111.IES</b>
CCT & CRI	<b>3CCT, 80CRI minimum</b>
Initial Delivered Lumens	<b>1,792</b>
Wattage	<b>16.3W</b>
Efficacy	<b>109.9</b>
Beam Angle	<b>50% = 111.7° 10% = 161.5°</b>
Spacing	<b>0° = 1.24 90° = 1.26</b>

Photometric values based on tests performed in compliance with LM-63 & LM-79.

### Indoor Candela Plot

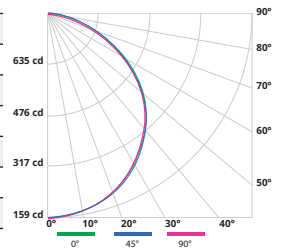

ETI Solid State Lighting  
720 Northgate Parkway, Wheeling, IL 60090



1.855.384.7754



www.ETISSL.com



etiorders@ETISSL.com

All specifications are subject to change without notice. All reported values are nominal or typical values, measured under laboratory conditions @ 25° C (77° F). Actual performance can vary slightly as a result of end-user application & environment.