


- > Base G13 Bi-Pin
- > Daylight 5000K CCT
- > Lasts 45 years\* or 50,000 Hours Continuous Use
- > Maintenance Free No Bulb Replacements
- > Power Either End
- > 5 Year Limited Warranty

## **LED Retrofit Kit for Fluorescent Fixture**

7200 lms | 120-277VAC | Ordering 64101162 | Part RK-72-840-MV-DE



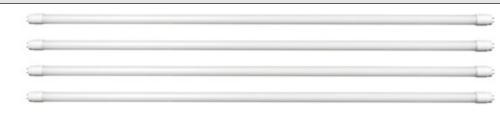

## **SPECIFICATIONS**

**Ordering** 64101162

Part Certification RK-72-840-MV-DE

Description 64101162

Input Voltage (VAC) LED Retrofit Kit for Fluorescent Fixture

 Wattage
 120-277

 Dimmability
 48W

Average Rated Life¹ Non-Dimming
Typical Lumens² 50,000 hours
CCT³ 7200lm

Location Rating 5000K CRI⁴ UL Damp

Beam Angle 80
Operating Temperature 120

Min -4°F (-20° C),

Power Factor Max 115°F (45° C)

**R9** >0.9 **DUV** 7

0.0015

Operating Frequency (Hz) 50/60

- 1 Hours lifetime with 70% lumen maintenance
- 2 Thermally stable typical lumens (±10%)
- 3 Thermally stable CCT (±10%)
- 4 Color rendering index/Ra



www.ETiSSL.com Call: 1.855.ETi.SSLI 1.855.384.7754













## **LED Retrofit Kit for Fluorescent Fixture**

7200 lms | 120-277VAC | Ordering 64101162 | Part RK-72-840-MV-DE

## SHIPPING INFORMATION

**Ordering** 64101162

Part RK-72-840-MV-DE 849489060071
Product Dimensions (L x W x H in.) 47 x 4 1/8 x 2 1/2

Product Dimensions (L x W x H cm.) 120 x 11 x 6

Product Weight (lbs.)

Inner Carton Quantity

Inner Carton Bar Code

N/A

Inner Carton Dimensions (L x W x H in.)

Inner Carton Dimensions (L x W x H cm.)

Inner Carton Weight (lbs)

N/A

Master Carton Quantity

3.15

N/A

N/A

2

Master Carton Bar Code 50849489060076

Master Carton Dimensions (L x W x H in.) 51 x 8 x 7

Master Carton Dimensions (L x W x H cm.) 129 x 21 x 114

Master Carton Weight (lbs) 11.66
Pallet Quantity 70

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. For FCC Part 15 user information, Please see www.ETiSSL.com/fcc15b

TO ORDER: www.ETiSSL.com Call: 1.855.ETi.SSLI 1.855.384.7754 ETi Solid State Lighting, Inc. 720 Corporate Woods Parkway Vernon Hills, IL 60061 Phone: 855.384.7754 Fax: 847.383.6256