


Get the power you need on the job

RhinoBox heavy duty temporary power centers are designed to deliver safe and reliable temporary power in industrial and commercial job site conditions

Features & benefits

“Plug & power” temporary power centers provide reliable power for construction sites, renovations, demolition, sporting events, entertainment venues, filmmaking, carnivals and more. Plug into the power of RhinoBox for all your temporary power needs.

Tool less and hinged clear polycarbonate door over circuit breaker panel provides damp location protection

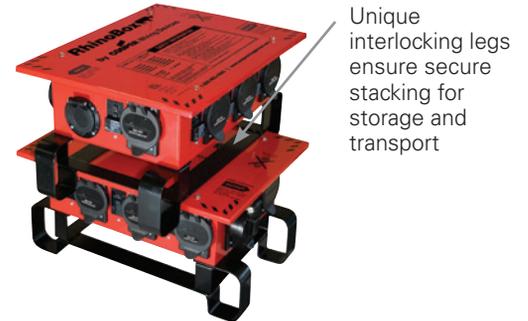

Unique interlocking legs ensure secure stacking for storage and transport



Complete wiring diagram on inside cover providing simplified identification

Powder coated enclosures are weather resistant and high visibility OSHA safety red



Clearly marked safety and testing instructions are easy to read

NEMA Type 3R protection for the most rugged environments

Flip covers provide maximum weather resistance



Ground fault circuit interrupters (GFCIs) protect against ground faults

Sturdy heavy duty steel legs are reinforced to withstand abuse and provide long lasting performance

3/8" holes in legs ideal for caster, sled legs and attachment to fixed surfaces



Weather resistant “WR” duplex receptacles provide more options for multi-use applications in outdoor environments

Available for locking and straight blade applications, devices have ratings that are clearly marked for easy identification

RhinoBox temporary power centers with GFCI protection

Product description

50A input
20A, 30A, 50A output
120/240 V/AC (max.)



RB302M

Features

- Safely centralize and distribute temporary power on the job site
- Unique patented “stackable” design allows multiple RhinoBox units to lock together for safe transport and storage
- NEMA Type 3R rainproof enclosures
- Available with manual or automatic GFCI reset configurations
- Weatherproof receptacle covers protect from damage and weather
- Flip-up circuit breaker cover prevent accidental tripping

RhinoBox



Rating A	V/AC	Distribution devices	Receptacle ratings	Protection		Catalog no.*	
				Overload	GFCI		
50	120/240 Max.	(6) WR duplex receptacles	20A, 125V	✓	✓	□ RB300M	•
		(1) Locking receptacle	30A, 250V	✓	✓		
		(1) Locking inlet	50A, 125/250V	—	—		
		(1) Locking outlet	50A, 125/250V	—	—		
50	120/240 Max.	(6) WR duplex receptacles	20A, 125V	✓	✓	□ RB300M-L5	•
		(1) Locking receptacle	30A, 125V	✓	✓		
		(1) Locking inlet	50A, 125/250V	—	—		
		(1) Locking outlet	50A, 125/250V	—	—		
50	120/240 Max.	(6) Single receptacles	20A, 125V	✓	✓	□ RB301M	•
		(1) Locking receptacle	30A, 250V	✓	—		
		(1) Locking inlet	50A, 125/250V	—	—		
		(1) Locking outlet	50A, 125/250V	—	—		
50	120/240 Max.	(6) Locking receptacles	20A, 125V	✓	✓	□ RB302M	•
		(1) Locking receptacle	30A, 250V	✓	—		
		(1) Locking inlet	50A, 125/250V	—	—		
		(1) Locking outlet	50A, 125/250V	—	—		
50	120/240 Max.	(3) Single receptacles	20A, 125V	✓	✓	□ RB303M	•
		(3) Locking receptacles	20A, 125V	✓	—		
		(1) Locking receptacle	30A, 250V	✓	—		
		(1) Locking inlet	50A, 125/250V	—	—		
		(1) Locking outlet	50A, 125/250V	—	—		
50	120/240 Max.	(7) WR duplex receptacles	20A, 125V	✓	✓	□ RB3001M	•
		(1) Locking inlet	50A, 125/250V	—	—		
		(1) Locking outlet	50A, 125/250V	—	—		
50	120/240 Max.	(7) Locking receptacles	20A, 125V	✓	✓	□ RB3021M	•
		(1) Locking inlet	50A, 125/250V	—	—		
		(1) Locking outlet	50A, 125/250V	—	—		

*Automatic GFCI reset configurations are available. When ordering automatic RhinoBox replace “M” in Catalog no. with “A”.
Example: RB300A = Automatic; RB300M = Manual.



5-20R
L5-20R
L6-30R
Plug Non-NEMA 50A 125/250V CA Standard
Receptacle Non-NEMA 50A 125/250V CA Standard

Testing & code compliance: cETLus listed for outdoor use - NEMA Type 3R products. Complies with NEC® Articles 525 & 590 & OSHA Reg. 29CFR, Part 1926, Subpart K, 1926.404, GFCI requirements. Conforms to UL1640 and CSA C22.2, no. 14.

Material characteristics: Enclosure: Cold-rolled 18 gauge steel. Legs: Cold-rolled 10 gauge steel.

Compliances, specifications and availability are subject to change without notice.

Indicates NAFTA compliant - Page Q-32