

LED TUBE-LINEAR

Model No. ET8-15W50SH

A smart energy-saving alternative to traditional fluorescent lighting, the Euri Lighting **ET8-15W50SH** outputs high lumens for low watts. With hybrid technology, this 4-foot LED tube makes for uncomplicated installation with or without a ballast. Shatterproof glass and built to last 50,000 hours, Euri Lighting's **ET8-15W50SH** reduces energy and maintenance worries with every use.

***Hybrid technology reduces maintenance expenses and allows adaptable installation methods whether a ballast is present or not**



32W

REPLACEMENT

15 Watts

3500K
5000K
CCT

3CCT Selectable

LED Hybrid

Hybrid Technology

High Output

*Dimmable

Single & Double Ended

Enclosed Fixture Suitable

Electrical Specifications


| Input Power | Equivalency | Input Voltage | Lumen Output | Luminous Efficacy | CCT | Estimated Yearly Cost |
|-------------|-------------|---------------|--------------|-------------------|--------|-----------------------|
| 15 W | 32 W | 120-277 V | 1950 lm | 130 lm/W | 3500 K | \$ 1.80 |
| 15 W | 32 W | 120-277 V | 2000 lm | 133 lm/W | 4000 K | \$ 1.80 |
| 15 W | 32 W | 120-277 V | 1900 lm | 133 lm/W | 5000 K | \$ 1.80 |

| Beam Angle | Center Beam | CRI | Power Factor | Input Current | Base | Lamp Lifespan |
|------------|-------------|-----|--------------|---------------|------|---------------|
| 200° | 320° | 83 | 0.9 | 0.139 A | G13 | 50,000 Hrs. |

Mechanical Specifications

| Rating | Operational Temperature | Inner Box QTY. | Master Box QTY. | Dimensions(in.) | UPC Code |
|------------|-------------------------|----------------|-----------------|-------------------|----------------|
| Damp Rated | -4°F - 113°F | N/A | 20 pcs | 1"(Ø) x 47.16"(H) | 10811174034626 |

Product Dimensions

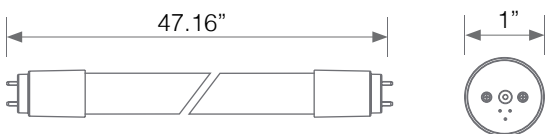



Dimming Driver

| Image | Model No. | Input Power | Input Voltage | Input current | Power Factor | Size of the wire in the module (in.) | Dimmable |
|-------|-----------|-------------|---------------|---------------|--------------|---|---------------|
| | EED-100WD | 100W | 120-277 V | 1A | 0.9 | Left side: Red(Out-L) -30" Blue(Out-N) -46" Right side: White(In-N) -21" Black(In-L) -21" Purple(DIM+) -21" | 0-10V dimming |

* The dimmable function can only be used with Euri dimmable driver.
 Please refer to the wiring diagram below. In case of any questions please consult info@eurilighting.com.

Wiring Diagram

