



Ceiling-mount and wall-mount models with various options for small to large bathrooms

- Selectable Airflow*
- Quiet Operation
- LED*, Humidity*, Occupancy*
- Low-Profile Design
- Wall/Ceiling Mounting
- ETL listed for use over bathtubs and showers when connected to GFCI protected branch circuit (ceiling installation only)


*select models

[Find more details in our online catalogue](#)


Technical parameters

Nominal data	
Voltage (nominal)	120 V
Frequency	60 Hz
Phases	1~
Input current	0.25 A
Air flow	110; 130; 150 cfm
Temperature of transported air	max 104 °F
Protection/Classification	
Insulation class	A
Certificate	Energy Star, California 24
Dimensions and weights	
Duct dimension; Circular, outlet	6 in.
Weight	14.3 lb
Optional	
Duct connection type	Circular
Motor type	DC

Performances

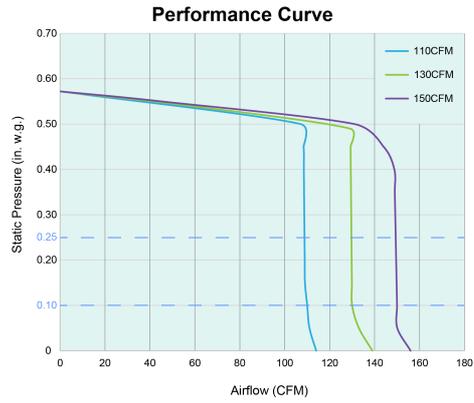



HVI Certified Rating(s)			
Static Pressure (In. Wg.)	Rated Airflow (CFM)	Rated Noise (Sones)	Rated Power (W)
0.1	110-130-150	0.5-0.7-0.9	7.4-10.2-11.6
0.25	108-130-150	1.1-1.1-1.2	14.1-18.0-20.4

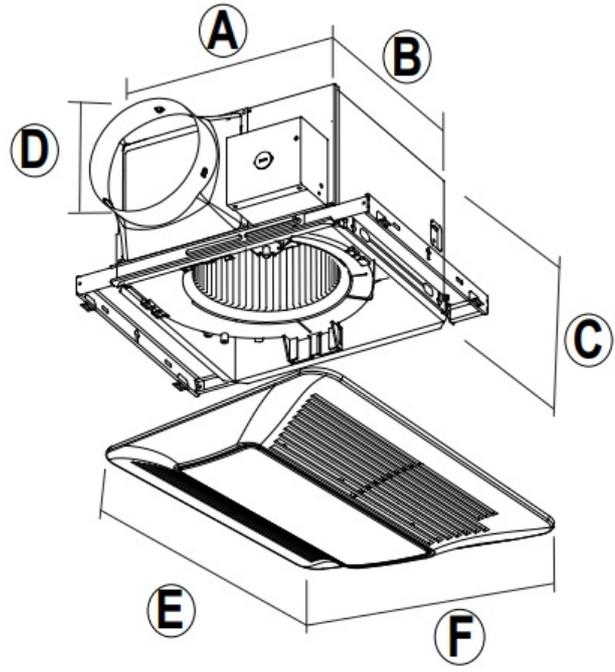

A	B	C	D	E	F
11 3/8 (289)	10 1/2 (267)	7 5/8 (194)	6 (152)	13 (330)	13 3/4 (349)

Dimensions are in inches (mm).

Wiring

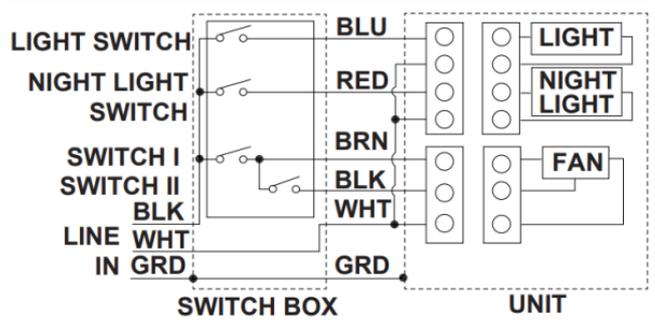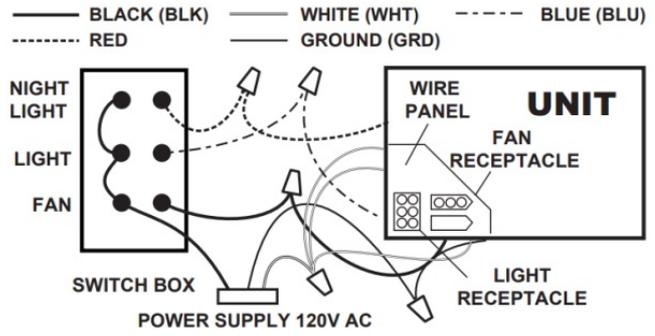

Accessories

FD60EM Electronic timer (411386)

HS 6W External Louver Exhaust (45153)

bathfan Select Radiation Dmpr (494046)

DHS 05 Humidity/Fan control (494044)

FIDT 6 Insulated Flex Duct (411064)

6x4 Reducer Bulk pack, 20pcs (484322)

Ceiling Radiation Damper, Large (98600)

Documents

484332 Select 110-130-150 Submittal Sheet EN

E2161 bathfan Comparison Brochure EN

484288 IOM Bathfan Select Series EN

484281 Select 110-130-150 Spec Sheet EN

BATHFAN_CSI_SPECIFICATION.ZIP