



Project	
Notes	
Type	Date
Cat. No.	

**AXS™ Series**

**LED Aluminum Exit Sign**



**APPLICATIONS**

The AXS Die Cast Aluminum Exits are designed to combine both beauty and performance while maintaining optimal energy efficiency with bright, uniform illumination. Ideal for applications requiring general purpose emergency lighting exit sign.

**AXS Series**

- AXS-1-B-A-R
- AXS-1-B-A-G
- AXS-2-B-A-R
- AXS-2-B-A-G

**Specification Features**



**Limited Warranty 5-years**

**Quick Ship**

Made to order only

**Construction**

Premium-grade, die-cast aluminum housing ( also available for in optional black or white powder-coated finishes). Field selectable knockout Chevron directional indicators. Quick-snap face plate closure. Unique design allows double face conversion in the field.

**Electrical**

Dual 120/277 voltage. Charge rate/power “ON” LED indicator light and push-to-test switch for mandated code compliance testing. 4.8V long-life, maintenance - free, rechargeable NiCad battery. Internal solid-state transfer switch automatically connects the internal battery to the LED lamp head for minimum 90-minute emergency illumination. Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

**Qualifications**

Meets UL924, NFPA 11 life safety Code, NEC, OSHA Local and State Codes. UL listed for damp locations ( 0° C - 50° C ).

**Installation**

Universal mounting pattern knock-out in back plate for J-Box mounting. EZ-snap thermoplastic mounting canopy included provides top or end mount.

**Warranty**

5-year Limited Warranty on all electronics and housing. Battery pro rated for 5 years.

**Ordering Information**

Example: AXS-1-B-A-R

AXS	1	B	A	G	EM	
<b>Series</b> AXS Aluminum Exit Sign	<b>Faces</b> 1	<b>Housing Color</b> B- Black	<b>Housing</b> A- Aluminum	<b>Lettering</b> R - Red G - Green	<b>Battery</b> AC - AC only 2C- Dual Circuit EM- 90 minute battery	

Specifications and Dimensions subject to change without notice.

**Performance Summary**

Input Voltage	120V/277V
Input Frequency	50/60 Hz
Rated Wattage	2W
Rated Life	60,000 hours
L70	> 72,000 hours or > 45,000
Power Factor	> 0.9
Operating Temp.	0°C to 40°C

**Performance Data**

Lens Type	Form Factor	Catalog No.	Rated Wattage (W)
None		AXS-1-B-A-R	2
		AXS-1-B-A-G	2

NOTES:


- <sup>1</sup> Made to order items. Minimum 90 day lead time. Minimum 500 order quantity.
- <sup>2</sup> Typical color consistency. May vary or be changed.
- <sup>3</sup> Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C.



Specifications and Dimensions subject to change without notice.

## Product Dimensions

AXS

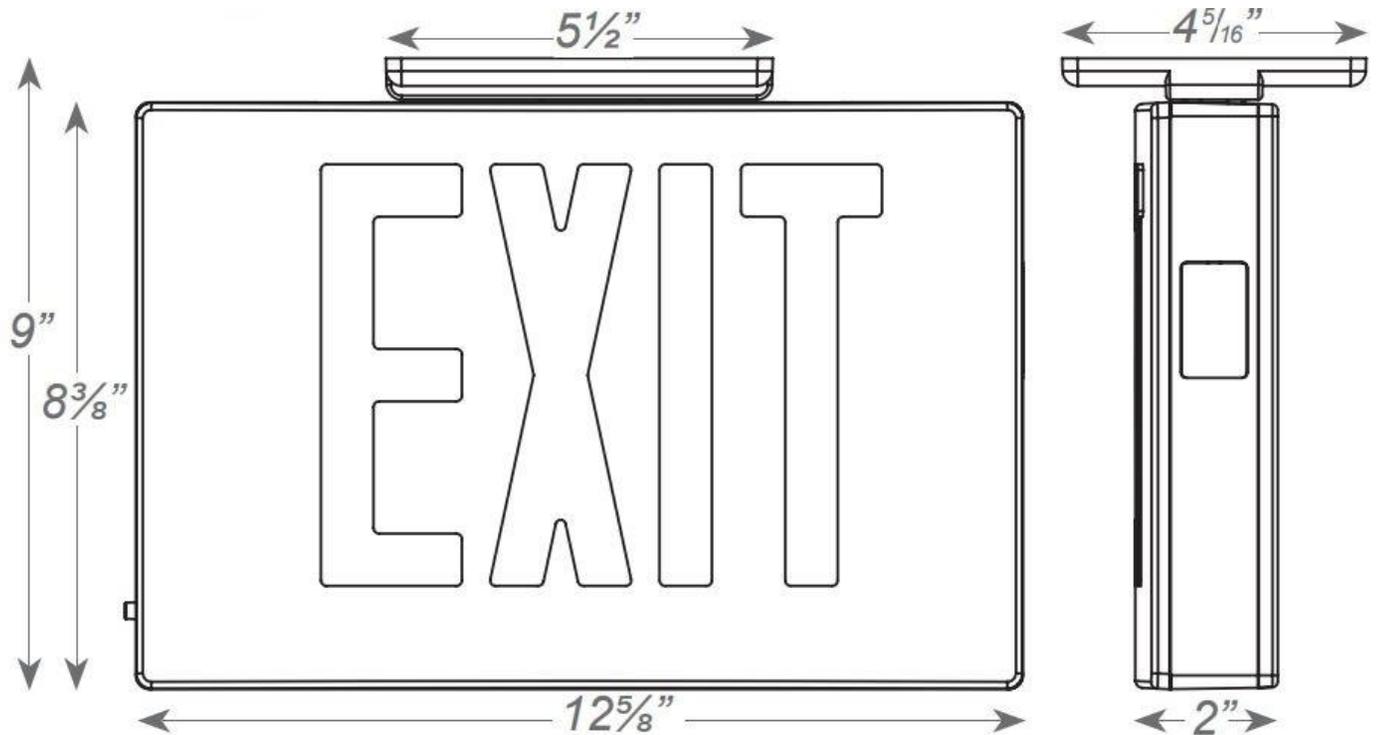

**Globalux**  
LIGHTING

© 2019 Globalux Lighting, LLC. All rights reserved. For informational purposes only. Reproduction in whole or part is prohibited without prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequences of its use. GlobaluxLighting reserves the rights make changes in specification at any time without notice.

**Globalux Lighting LLC**  
www.globaluxlighting.com  
2037 S. Vineyard Ave  
Ontario, CA 91761  
Ph: 909-591-7506