







Product Dimensions

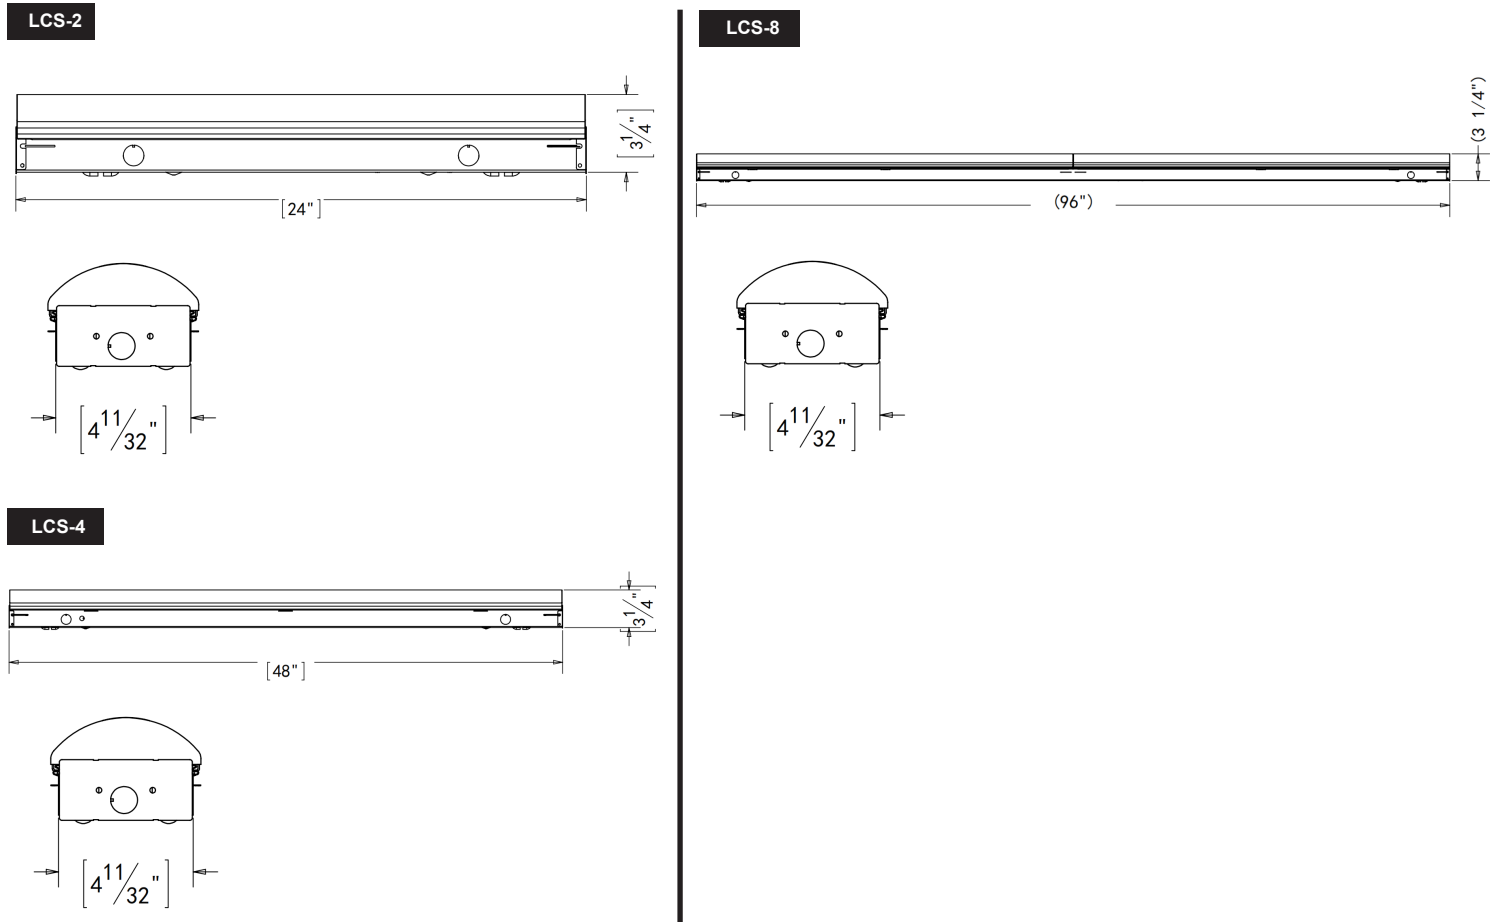

Photometric Data

LCS-2-17-MV-850 Tested in accordance to IESNA LM-79

Polar Candela Curve

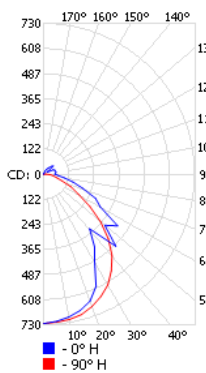

Zonal Lumen Summary

Zone	Lumens	% Lamp	% Luminaire
0-30	555.8	27.70%	27.80%
0-40	878.1	43.80%	43.90%
0-60	1,440.50	71.90%	72%
60-90	408.4	20.40%	20.40%
0-90	1,848.80	92.30%	92.40%

Coefficients of Utilization


RCC %:	80				70				50	
	70	50	30	0	70	50	30	0	50	30
RCR: 0	1.17	1.17	1.17	1.17	1.13	1.13	1.13	0.92	1.07	1.07
1	1.07	1.02	0.97	0.93	1.03	0.99	0.95	0.77	0.93	0.9
2	0.97	0.89	0.82	0.76	0.94	0.86	0.8	0.65	0.81	0.76
3	0.89	0.78	0.7	0.64	0.85	0.76	0.69	0.56	0.72	0.66
4	0.81	0.69	0.61	0.54	0.78	0.68	0.6	0.48	0.64	0.57
5	0.75	0.62	0.53	0.47	0.72	0.61	0.53	0.42	0.58	0.51
6	0.69	0.56	0.48	0.41	0.67	0.55	0.47	0.37	0.52	0.45
7	0.64	0.51	0.43	0.37	0.62	0.5	0.42	0.34	0.48	0.41
8	0.6	0.47	0.38	0.33	0.58	0.46	0.38	0.3	0.44	0.37
9	0.56	0.43	0.35	0.3	0.54	0.42	0.35	0.27	0.4	0.34
10	0.53	0.4	0.32	0.27	0.51	0.39	0.32	0.25	0.38	0.31

Specifications and Dimensions subject to change without notice

Photometric Data

LCS-4-40-MVD-840 Tested in accordance to IESNA LM-79

Polar Candela Curve

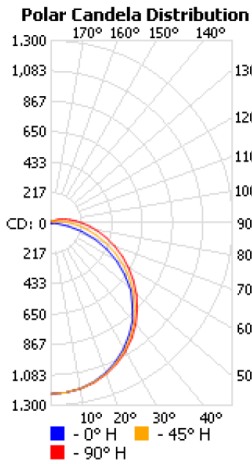

Zonal Lumen Summary

Zone	Lumens	% Lamp	% Luminaire
0-30	955.8	23.1%	23.1%
0-40	1,575.5	38.1%	38.1%
0-60	2,840.8	68.6%	68.7%
60-90	1,047.8	25.3%	25.3%
70-100	655.9	15.9%	15.9%
90-120	194.4	4.7%	4.7%
0-90	3,888.7	94%	94%
90-180	246.1	5.9%	6%
0-180	4,134.7	99.9%	100%

Coefficients of Utilization

RCC %:	80				70				50				30				10				0	
	70	50	30	0	70	50	30	0	50	30	20	0	50	30	20	0	50	30	20	0	0	
RW %:	1.18	1.18	1.18	1.18	1.14	1.14	1.14	.94	1.08	1.08	1.08	1.02	1.02	1.02	1.02	.96	.96	.96	.96	.94	.94	
RCR:	0	1	2	3	4	5	6	7	8	9	10	0	1	2	3	4	5	6	7	8	9	10

Accessory Options



Cords and Whips

CS6-182-115P-WH	6' Cord 18/2 Nema 115P 120V White Finish
CS6-183-515P-BL	6' Cord 18/3 Nema 515P 120V Black Finish
CS6-183-183-BL	6' Cord 18/3 TO 18/3 SJT ENDS Black Finish
CS6-183-L515P-BL	6' Cord 18/3 Nema L515P(Twist Locking) 120V Black Finish
CS6-183-L615P-BL	6' Cord 18/3 Nema L715P(Twist Locking) 240V Black Finish
CS6-183-L715P-BL	6' Cord 18/3 Nema L715P(Twist Locking) 277V Black Finish
CS12-183-183-BL	12' Cord 18/3 TO 18/3 SJT ENDS Black Finish
CS12-183-L515P-BL	12' Cord 18/3 Nema L515P(Twist Locking) 120V Black Finish
CS12-183-L615P-BL	12' Cord 18/3 Nema L715P(Twist Locking) 240V Black Finish
CS12-183-L715P-BL	12' Cord 18/3 Nema L715P(Twist Locking) 277V Black Finish
FW3	6' 18/3 wire
FW4	6' 18/4 wire



© 2019 Globalux Lighting, LLC. All rights reserved. For informational purposes only. Reproduction in whole or part is prohibited without prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequences of its use. Globalux Lighting reserves the rights make changes in specification at any time without notice.

**Globalux Lighting LLC**  
 www.globaluxlighting.com  
 2037 S. Vineyard Ave  
 Ontario, CA 91761  
 Ph: 909-591-7506