



Project	
Notes	
Type	Date
Cat. No.	

**LRV™ Series**

**LED Round Vanity**



**DESCRIPTION**

The LRV Series tiered contemporary framed wall mounted vanity fixture and is available in brushed nickel and oil rubbed bronze. Updated with the latest in LED technology. The long LED life coupled with exceptional color rendering make this fixture attractive for new or retrofit projects. The LRV is an elegant lighting solution that can be used in various applications including corridors and restrooms. Fixture junction box (not included).

**Specification Features**



**Construction**

Single ring surround a milk white acrylic diffuser with decorative end caps provides widespread and even illumination. Lens design and materials provide uniform illumination without pixelation.

**Qualifications**

All luminaires are built to UL 1598 and 2108 standards, and bear appropriate ETL labels. Damp location labeling. Adheres to LM70, LM80, and TM21 industry standards. ENERGY STAR® certified product (for 3000K and 4000K only) and Title 24 qualified. Dedicated 120V Models are FCC Title 47 CFR, Part 15, Class B for residential and commercial applications. California Title 24 Compliant, JA8 compliant, CEC Listed.

**Warranty**

3-year limited warranty. See complete warranty for terms and exclusions. (Labor not included).

**Electrical**

Equipped standard with 120V fixed output driver operating at 60 Hz.

**Installation**

Designed for wall mounting on 4" electrical J-Box.

**LRV Series**

- 24" Length**  
20W, 1,920 Lumens
- 36" Length**  
27W, 2,592 Lumens
- 48" Length**  
36W, 3,456 Lumens

Rated Life 60,000 hours  
Limited Warranty 3 years  
Efficacy up to 96 LPW

**Quick Ship**

- LRV-24-20-120-930-BN
- LRV-36-27-120-930-BN
- LRV-48-36-120-930-BN

**Ordering Information**

Example: LRV-24-20-120-930-BN

LRV	24	18	120	CRI	30	NS
<b>Series</b> LRV LED Round Vanity	<b>Form Factor</b> 24- 24" Length <sup>2,3</sup> 36- 36" Length <sup>2,3</sup> 48- 48" Length <sup>2,3</sup>	<b>Rated Wattage</b> <b>24" Housing</b> 20- 20W, 1,920 Lumens <b>36" Housing</b> 27- 27W, 2,592 Lumens <b>48" Housing</b> 36- 36W, 3,456 Lumens	<b>Driver Type</b> 120- 120V <sup>1</sup>	<b>CRI</b> 9 90+CRI	<b>Color Temp</b> 30 3000K <sup>3</sup>	<b>Finish</b> <b>BN-</b> Brushed Nickel <b>ORB--</b> Oil Rubbed Bronze

Specifications and Dimensions subject to change without notice

## Performance Summary

Input Voltage	120V
Input Frequency	50/60 Hz
Rated Wattage	See Performance Table
Delivered Lumens	See Performance Table
Efficacy	96 LPW
CRI	90+, R9 > 0
Available CCT <sup>1</sup>	3000K
Color Consistency <sup>2</sup>	5-step MacAdam Ellipse
Rated Life	50,000
L70 <sup>3</sup>	> 72,000 hours or > 45,000 >
Power Factor	0.9
THD	< 20%
Dimming	N/A
Operating Temp.	-18°C to 40°C

## Performance Data

Lens Type	Form Factor	Catalog No.	Rated Wattage (W)	Delivered Lumens	Efficacy (lm/W)
Frosted Acrylic	24	<a href="#">LRV-24-20-120-930-BN</a>	20W	1,920	96
	36	<a href="#">LRV-36-27-1120-930-BN</a>	27W	2,592	96
	48	<a href="#">LRV-48-36-120-930-BN</a>	36W	3,456	96


### NOTES:

- <sup>1</sup> Made to order items. Minimum 90 day lead time. Minimum 500 order quantity.
- <sup>2</sup> Energy star listed
- <sup>3</sup> Quick ship: 3000K. Other CCTs may require a lead time or be special order
- <sup>4</sup> Typical color consistency. May vary or be changed.
- <sup>5</sup> L70 hours calculated based on LED package manufacturer LM80 report and ISTMT report of LED in luminaire. Stated values are for select catalog numbers. Contact manufacturer for detailed information



Specifications and Dimensions subject to change without notice

LRV-24

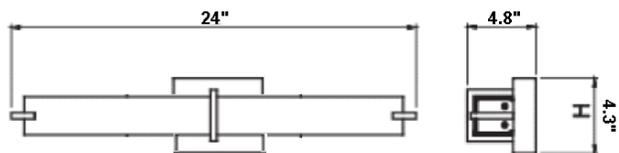

LRV-48



LRV-36

