

PLS 3.5W HYB G23 TITANIUM LED SERIES



PL:EDGE
SERIES

3.5W REPLACES



7-9W
CFL

60% Energy Savings


PRO



- HYBrid installation - DIrect or BYPass
- Compatible with magnetic ballasts - DIrect installation
- Built-in universal voltage driver - BYPass installation
- 180° rotatable base
- Exceptional efficacy 86 LPW
- Suitable for use in totally enclosed fixtures
- Fixture operating temperature: -4°F to 95°F (-20°C to 35°C)
- Lamp ambient temperature: -4°F to 113°F (-20°C to 45°C)
- Ballast Dependent. Please refer to www.greencreative.com for full ballast compatibility list.



COMPACT FORM FACTOR AND ROTATABLE BASE SUITABLE FOR ALL APPLICATIONS

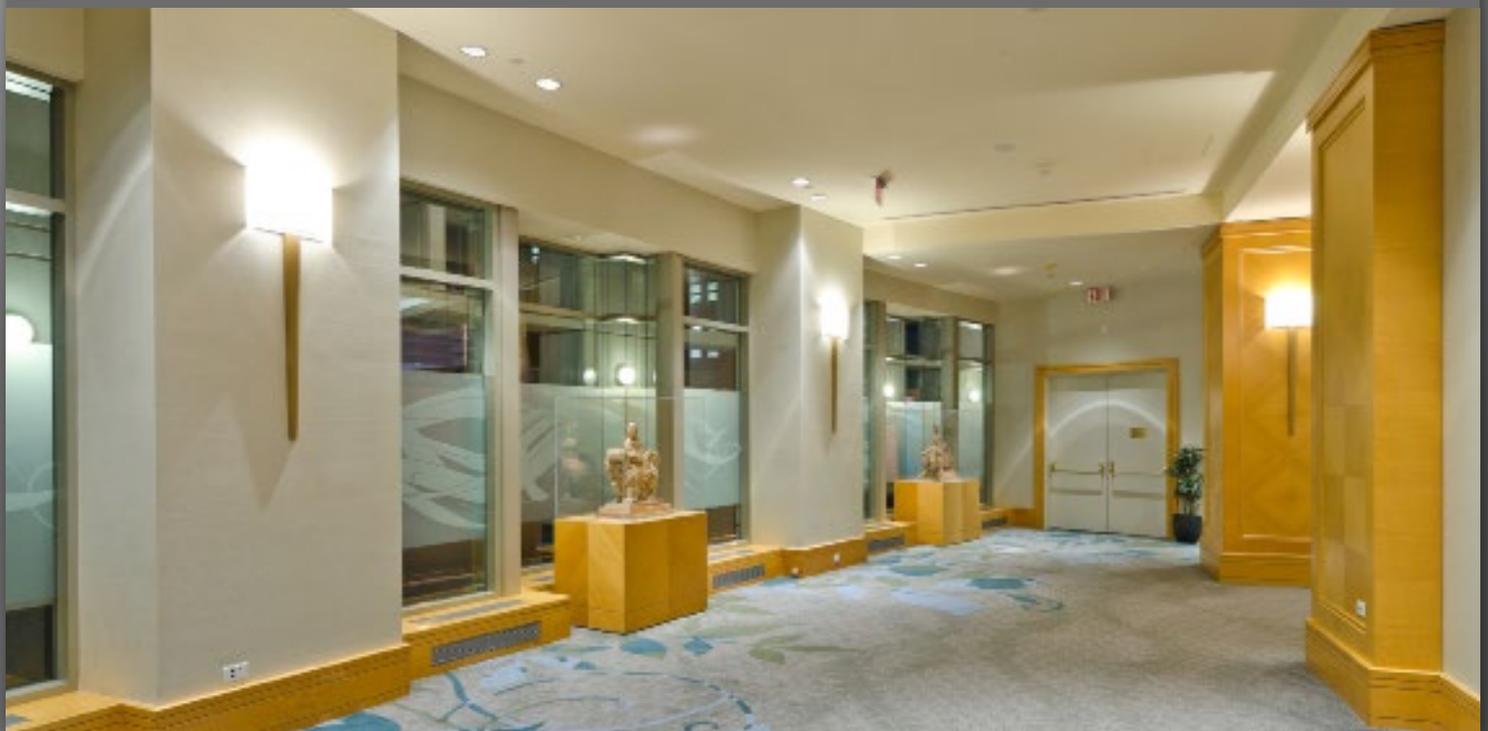

APPLICATIONS

Office




Hospitality



General



Base: G23 (2-pin CFL)
Voltage: Magnetic ballast compatible
 120-277V
Dimmable: No
PF: 0.9
Lifetime: 50,000 hrs
Weight: 0.08lb / 38g

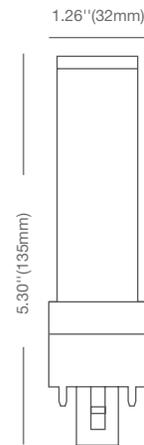

SPECIFICATIONS

Model	Product	Power (W)	CCT	CRI (typ.)	Lumens	LPW	Beam Angle
3.5PLS/827/HYB/G23	57812	3.5	Soft White Light 2700K	80	280	80	120°
3.5PLS/835/HYB/G23	57814	3.5	Neutral White 3500K	80	300	86	120°

* Suitable for use in totally enclosed fixtures

** Suitable for damp locations. Not for use where directly exposed to weather or water

*** Full installation guide and more details available on website

ACCESSORY ORDERING INFORMATION

Model	Product	Description
23EMDRIVER	98003	California Title 20 Compliant 23W Emergency LED Driver (Field Installation)