

# PLS 3.5W BYP 2G7 TITANIUM LED SERIES



3.5W REPLACES



**7-9W  
CFL**

60% Energy Savings

**PRO**



- ⌚ **Built-in universal voltage driver - Bypass installation**
- ⌚ **180° rotatable base**
- ⌚ **Exceptional efficacy 86 LPW**
- ⌚ **Last 4 times longer than CFL**
- ⌚ **Compact form factor fits most fixtures**
- ⌚ **Suitable for use in totally enclosed fixtures**
- ⌚ **Fixture operating temperature: -4°F to 95°F (-20°C to 35°C)**  
**Lamp ambient temperature: -4°F to 113°F (-20°C to 45°C)**



50,000 H



UNIVERSAL



EFFICACY



WARRANTY



CRI (Ra)



ENCLOSED\*




COMPACT FORM FACTOR AND ROTATABLE BASE SUITABLE FOR ALL APPLICATIONS




## APPLICATIONS


### Office

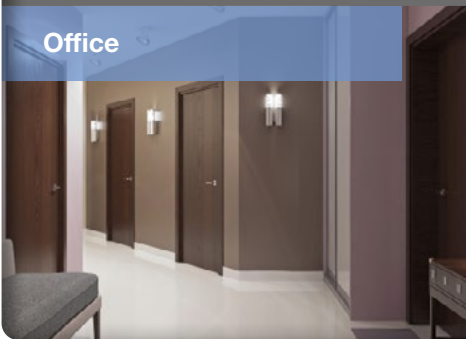


### Hospitality

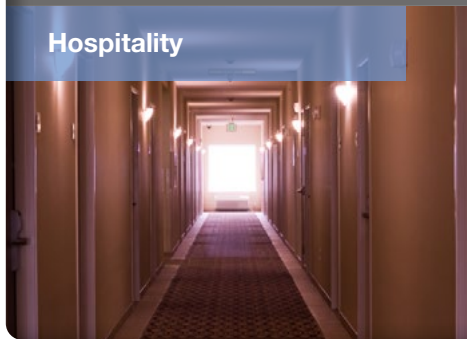

### General

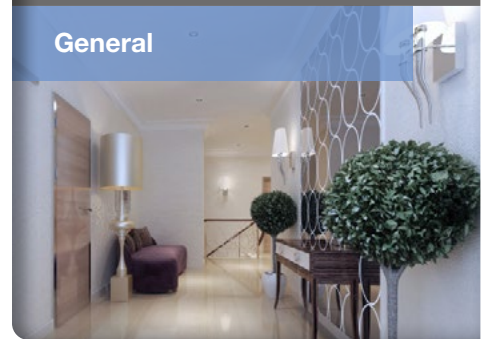

**Base:** 2G7 (4-pin CFL)  
**Voltage:** 120-277V  
**Dimmable:** No  
**PF:** 0.9  
**Lifetime:** 50,000 hrs  
**Weight:** 0.06lb. / 26g

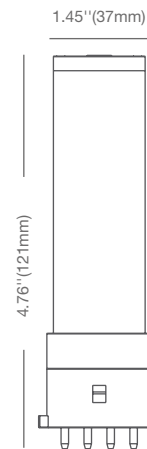

## SPECIFICATIONS

Model	Product	Power (W)	CCT	CRI (typ.)	Lumens	LPW	Beam Angle
<b>3.5PLS/835/BYP/2G7</b>	57818	3.5	Neutral White 3500K	80	300	86	120°

\* Suitable for use in totally enclosed fixtures

\*\* Suitable for damp locations. Not for use where directly exposed to weather or water

\*\*\* Full installation guide and more details available on website