

# PLS 5.5W BYP 2GX7 TITANIUM LED SERIES



5.5W REPLACES





**13W  
CFL**

60% Energy Savings

**PRO**



- ⌚ Built-in universal voltage driver - Bypass installation
- ⌚ 180° rotatable base
- ⌚ Exceptional efficacy 91 LPW
- ⌚ Lamp ambient temperature: -4°F to 113°F (-20°C to 45°C)  
Fixture operating temperature: -4°F to 95°F (-20°C to 35°C)
- ⌚ Last 4 times longer than CFL
- ⌚ Compact form factor fits most fixtures
- ⌚ Suitable for use in totally enclosed fixtures



COMPACT FORM FACTOR AND ROTATABLE BASE SUITABLE FOR ALL APPLICATIONS



# PLS 5.5W BYP 2GX7 TITANIUM LED SERIES

## APPLICATIONS

### Office



### Hospitality




### General



Ref.#:DS106-PLS-5.5W-BYP-2GX7

**Base:** 2GX7 (4-pin CFL)  
**Voltage:** 120-277V  
**Dimmable:** No  
**PF:** 0.9  
**Lifetime:** 50,000 hrs  
**Weight:** 0.06lb. / 26g

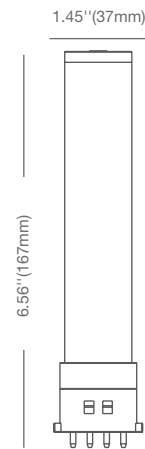

## SPECIFICATIONS

Model	Product	Power (W)	CCT	CRI (typ.)	Lumens	LPW	Beam Angle
<b>5.5PLS/835/BYP/2GX7</b>	57826	5.5	Neutral White 3500K	80	500	91	120°

\* Suitable for use in totally enclosed fixtures

\*\* Suitable for damp locations. Not for use where directly exposed to weather or water

\*\*\* Full installation guide and more details available on website