

PL H 15.5W BYP TITANIUM LED SERIES



PL:EDGE
SERIES

15.5W REPLACES



42W
CFL

60% Energy Savings

PRO



- High output 1800lm
- Built-in universal voltage driver - Bypass installation
- Compatible with G24d, GX24d, G24q & GX24q sockets
- Exceptional efficacy 116 LPW
- Lasts 4 times longer than CFL
- Available in 3000K, 3500K & 4000K CCT
- Fixture operating temperature: -4°F to 95°F (-20°C to 35°C)
Lamp ambient temperature: -4°F to 113°F (-20°C to 45°C)



50,000 H



UNIVERSAL



EFFICACY



WARRANTY



CRI (Ra)




SEMI DIRECTIONAL



PL PRODUCT FEATURES

BYPass Installation

This PL H lamp is not compatible with magnetic or electronic ballasts and requires bypassing the ballast during installation. The lamp runs directly off line voltage to eliminate compatibility problems, incidental power loss, lifetime issues, and maintenance costs associated with ballasts.

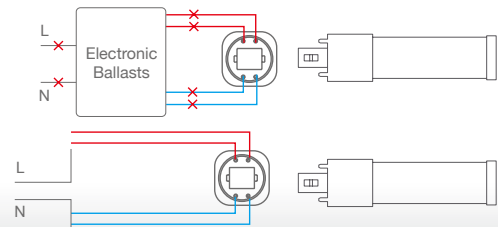

DESIGNED FOR HORIZONTAL APPLICATIONS



APPLICATIONS

Retail




Hospitality



Office



- Base:** G24d, GX24d, G24q & GX24q (2/4-pin CFL)
- Voltage:** 120-277V
- Dimmable:** No
- PF:** 0.9
- Lifetime (L70):** 50,000 hrs
- Weight:** 0.55lb / 249g
- Min. compartment dimensions:** 7-13/16" (DIA)x 5-7/8"(H)

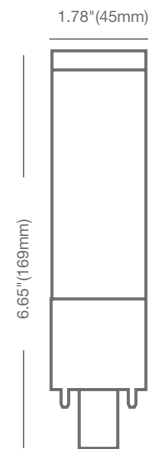

Note: This lamp may not fit in all 8" recessed cans. It is recommended a test installation be performed prior to the final installation.

SPECIFICATIONS

Model	Product	Power (W)	CCT	CRI (typ.)	Lumens	LPW	Beam Angle
15.5PLH/830/BYP	98252	15.5	Warm White 3000K	82	1700	110	110°
15.5PLH/835/BYP	98253	15.5	Neutral White 3500K	82	1750	113	110°
15.5PLH/840/BYP	98254	15.5	Cool White 4000K	82	1800	116	110°

* Suitable for damp locations. Not for use where directly exposed to weather or water
 ** Not intended for use in enclosed fixtures

ACCESSORY ORDERING INFORMATION

Model	Product	Description
23EMDRIVER	98003	California Title 20 Compliant 23W Emergency LED Driver (Field Installation)