


Project Name:	Type:
Part Number:	Date:

POWER AND CCT SELECT HYBRID PLL

FEATURES

- Replaces: 18W, 24W, 36W, 40W, 50W, and 55W 4-pin (2G11) CFL lamps
- Installation Options: DIRect or BYPass
- DIRect Installation: Compatible with Instant and Program-Start electronic ballasts¹
- BYPass Installation: Operates on line voltage
- SelectKelvin Technology: Field-selectable CCT – 3000K, 3500K, 4000K, 5000K, 6500K
- SelectDrive Technology: Field-selectable lumen output – 2,800 lm or 3,350 lm
- Construction: PET-coated, shatter-resistant glass
- Performance: Up to 152 LPW high efficacy
- Rated for: Damp locations and totally enclosed fixtures²
- Certifications: UL Listed and UL Classified
- Operating Temperatures:
 - Lamp: -4°F to 113°F (-20°C to 45°C)
 - Fixture: -4°F to 95°F (-20°C to 35°C)
- Lifetime: 50,000 hours (L70)
- Warranty: 5-year limited; optional 10-year extended available³
- Accessories: Includes one adhesive-backed support clip for easy installation
- Compliance: NSF (National Sanitation Foundation) certified for Food Zone (Non-Contact), Splash, and Non-Food Zones

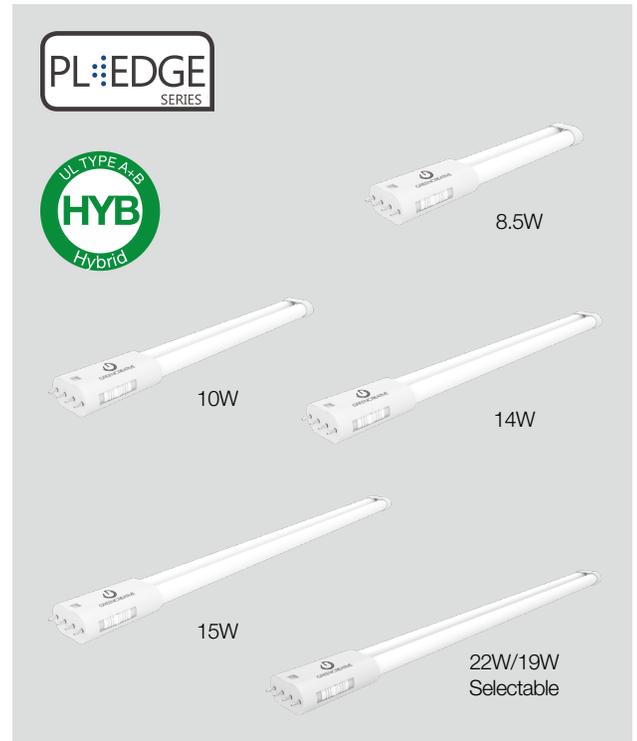

DIGITAL NAVIGATION

Explore the spec sheet through the links below

- [SPECIFICATIONS](#)
- [SUPPLIED ACCESSORY](#)
- [DIMENSION & WEIGHT](#)
- [INSTALLATION](#)
- [ACCESSORY ORDERING INFORMATION](#)
- [LOGISTIC INFORMATION](#)
- [EXTENDED WARRANTIES](#)
- [CERTIFICATION INFORMATION](#)

FOCUS FEATURE




2 Level Lumen Output
SelectDrive technology allows lumen to be tailored to application requirements and can be adjusted from 85% to 100%.




POWER AND CCT SELECT HYBRID PLL

SPECIFICATIONS													
Product	Model	Equiv.	Input Voltage	Wattage ⁴ (W)	CCT ¹	Lumens	Efficacy (LPW)	CRI	Power Factor	THD	Beam Angle	Fixture Rating	DLC
38722	8.5PLL/8CCTS/HYB/C	18W	120-277V	8.5	3000K	960	113	82	0.9	<20%	140°	Enclosed	N.A.
					3500K	1,000	118						
					4000K	1,000	118						
					5000K	1,000	118						
					6500K	1,000	118						
38723	10PLL/8CCTS/HYB/C	24W	120-277V	10	3000K	1,200	120	82	0.9	<20%	140°	Enclosed	N.A.
					3500K	1,250	125						
					4000K	1,250	125						
					5000K	1,250	125						
					6500K	1,250	125						
38724	14PLL/8CCTS/HYB/C	36W	120-277V	14	3000K	1,920	137	82	0.9	<20%	140°	Enclosed	N.A.
					3500K	2,000	143						
					4000K	2,000	143						
					5000K	2,000	143						
					6500K	2,000	143						
38725	15PLL/8CCTS/HYB/C	40W	120-277V	15	3000K	2,110	141	82	0.9	<20%	140°	Enclosed	√
					3500K	2,200	147						
					4000K	2,200	147						
					5000K	2,200	147						
					6500K	2,200	147						
38726	22PLL/8CCTS/HYB/SD/C	50/55W	120-277V	22	3000K	3,216	146	82	0.9	<20%	140°	Enclosed	N.A.
					3500K	3,350	152						
					4000K	3,350	152						
					5000K	3,350	152						
					6500K	3,350	152						
				19	3000K	2,720	143						
					3500K	2,720	143						
					4000K	2,800	147						
					5000K	2,800	147						
					6500K	2,800	147						

FOOTNOTES:
 1. Ballast Dependent. Please refer to www.greencreative.com for full ballast compatibility list.
 2. Suitable for use in totally enclosed fixtures. Please make sure the minimum dimensions of the lamp compartment in the fixture meet the guidelines in the installation guide.
 3. Please visit www.greencreative.com for Limited Warranty terms.
 4. Factory setting at 4000K CCT and highest lumen output.

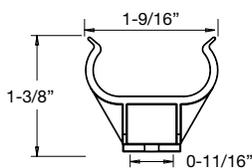SUPPLIED ACCESSORY						
Product	Model	Description	Pictures	Dimensions	Weight	
98015	PLLCLIP	Support clip with adhesive back for quick installation One support clip for each lamp included in the package			0.08oz	

DIMENSION & WEIGHT

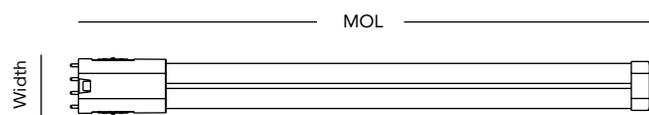

Model	Base	MOL	Width	Weight
8.5PLL/8CCTS/HYB/C	2G11	8-7/8"	1-11/16"	0.187 lb
10PLL/8CCTS/HYB/C	2G11	12-5/8"	1-11/16"	0.231 lb
14PLL/8CCTS/HYB/C	2G11	16-5/16"	1-11/16"	0.291 lb
15PLL/8CCTS/HYB/C	2G11	22-1/4"	1-11/16"	0.379 lb
22PLL/8CCTS/HYB/SD/C	2G11	21-1/16"	1-11/16"	0.364 lb



POWER AND CCT SELECT HYBRID PLL


INSTALLATION




Adjust the Power and CCT select switch to proper position.
Note: Do not adjust the Power and CCT select switch when power on.

DIRECT INSTALLATION - TYPE A

Step 1. Remove all existing CFL lamps from luminaire.




Step 2. Insert the LED PLL lamp into the open socket within the fixture.




BYPASS INSTALLATION - TYPE B

Step 1. Cut all wires connected to the ballast, remove the ballast.



Step 2. Rewire the fixture according to the wiring configuration.



ACCESSORY ORDERING INFORMATION

Product	Model	Description	Pictures	Dimensions	Compatible Skus
37934	8EMINVERTER	California Title 20 Compliant 8W Emergency LED Inverter (Field Installation)			8.5PLL/8CCTS/HYB/C
38096	24EMINVERTER	California Title 20 Compliant 24W Emergency LED Inverter (Field Installation)			8.5PLL/8CCTS/HYB/C 10PLL/8CCTS/HYB/C 14PLL/8CCTS/HYB/C 15PLL/8CCTS/HYB/C 22PLL/8CCTS/HYB/SD/C



POWER AND CCT SELECT HYBRID PLL

LOGISTIC INFORMATION

Model	Master Carton			Shipping Carton		
	Case Qty	Case Dimensions (LxWxH)	Case Weight	Case Qty	Case Dimensions (LxWxH)	Case Weight
8.5PLL/8CCTS/HYB/C	6PCS	11-5/8" x 4-3/8" x 3-9/16"	1.7 lb	24PCS	12-7/16" x 9-7/16" x 7-7/8"	7.72 lb
10PLL/8CCTS/HYB/C	6PCS	15-3/8" x 4-3/8" x 3-9/16"	2.14 lb	24PCS	16-1/8" x 9-7/16" x 7-7/8"	9.48 lb
14PLL/8CCTS/HYB/C	6PCS	19-3/16" x 4-3/8" x 3-9/16"	2.65 lb	24PCS	19-15/16" x 9-7/16" x 7-7/8"	11.46 lb
15PLL/8CCTS/HYB/C	6PCS	25" x 4-3/8" x 3-9/16"	3.31 lb	24PCS	25-15/16" x 9-7/16" x 7-7/8"	14.33 lb
22PLL/8CCTS/HYB/SD/C	6PCS	23-1/8" x 4-3/8" x 3-9/16"	3.31 lb	24PCS	23-15/16" x 9-7/16" x 7-7/8"	14.11 lb

EXTENDED WARRANTIES⁵

Model	Description
8.5PLL/8CCTS/HYB/C/10YEARWARRANTY	10 year warranty for 8.5PLL/8CCTS/HYB/C
10PLL/8CCTS/HYB/C/10YEARWARRANTY	10 year warranty for 10PLL/8CCTS/HYB/C
14PLL/8CCTS/HYB/C/10YEARWARRANTY	10 year warranty for 14PLL/8CCTS/HYB/C
15PLL/8CCTS/HYB/C/10YEARWARRANTY	10 year warranty for 15PLL/8CCTS/HYB/C
22PLL/8CCTS/HYB/SD/C/10YEARWARRANTY	10 year warranty for 22PLL/8CCTS/HYB/SD/C

FOOTNOTES:

5. Warranty based on a maximum of 4,368 annual operating hours (per year for ten years) and exposure to a maximum ambient temperature of 80°F / 27°C.

CERTIFICATION INFORMATION

Product	Model	DLC ID#
38725	15PLL/8CCTS/HYB/C	S-1CG5HS