

9.5" CDL 30W TITANIUM LED SERIES



PRO



30W REPLACES



**2X42W
CFL**



60% Energy Savings

- Ⓞ Fits existing architectural and commercial housing
- Ⓞ 120-277V circuit with 0-10V dimming
- Ⓞ Easy installation - Quick connector and pre-wired conduit
- Ⓞ Lasts 4 times longer than CFL
- Ⓞ Comfortable diffused light
- Ⓞ Available in 3000K, 3500K & 4000K CCT



PRODUCT FEATURES

Accessories include a carabiner safety clip that can be used during installation for easy wiring. This downlight features three spring-action clips, these spring-action clips push up easily and fit securely in most existing commercial and architectural housing.

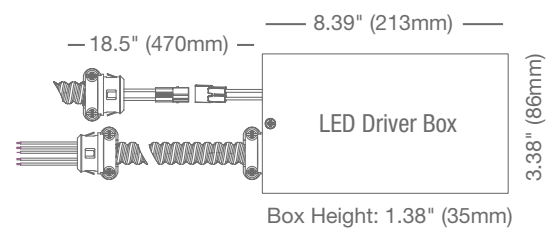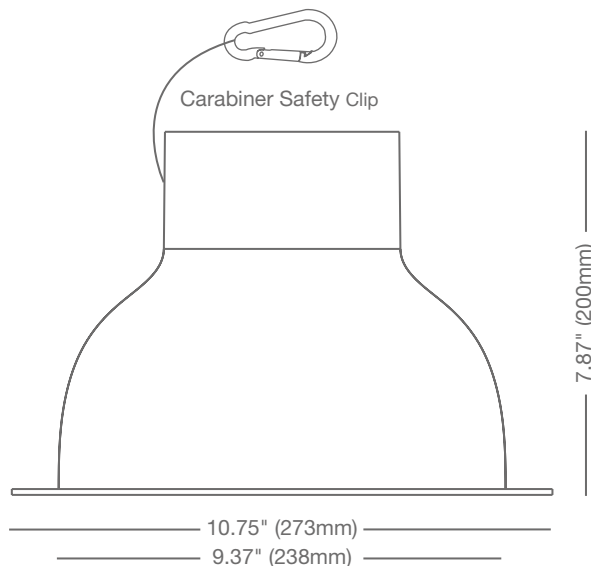

9.5" CDL 30W TITANIUM LED SERIES



APPLICATIONS

Retail



Hospitality



Office



Ref.#: DS284-CDL9.5-30W-100718

SPECIFICATIONS*

Product Model	98274 30CDL9.5DIM/930/277V	98275 30CDL9.5DIM/935/277V	98276 30CDL9.5DIM/940/277V
Type	9.5" Commercial Downlight	9.5" Commercial Downlight	9.5" Commercial Downlight
Power (W)	30	30	30
Voltage - Frequency	120-277V 50-60Hz	120-277V 50-60Hz	120-277V 50-60Hz
Color Temp. (ANSI)	Warm White 3000K	Neutral White 3500K	Natural White 4000K
CRI (Ra) (typ.)	80	80	80
Typical lumens (lm)	2700	2700	2760
Efficacy (LPW)	90	90	92
Beam Angle	90°	90°	90°
Dimmable	Yes	Yes	Yes
Power Factor	0.9	0.9	0.9
Temperature Rating	-13°F/-25°C - 95°F/35°C	-13°F/-25°C - 95°F/35°C	-13°F/-25°C - 95°F/35°C
Rated Lifetime - L70 (hrs.)	50,000	50,000	50,000
Dia. x MOL	9.37"x7.87" (238x200mm)	9.37"x7.87" (238x200mm)	9.37"x7.87" (238x200mm)
Trim Weight (lb. / g)	2.23lb / 1000g	2.23lb / 1000g	2.23lb / 1000g
Driver Weight (lb. / g)	1.46lb / 660g	1.46lb / 660g	1.46lb / 660g

ORDERING INFORMATION

Model	Description	Instructions
/EM	Emergency LED Driver 10W	To order this option add /EM after the model number
Example: 30CDL9.5DIM/835/277V/EM		

* Suitable for damp locations. Not for use where directly exposed to weather or water

** Not intended for use in enclosed fixtures

*** Full installation guide and more details available on website