

## KT-LEDXXA19-O-9CSF /G4

### GENERAL PURPOSE LED LAMP

#### DESCRIPTION

A19 Lamp | E26 Medium Base | Color Select |  
 Dimmable | 15,000hr Lifetime

#### APPLICATIONS

- Table, desk, and floor lamps
- Wall sconces
- Surface-mount ceiling fixtures
- General lighting
- Pendant lights



Enclosed  
 Fixture Rated



**2 YEAR**  
 WARRANTY

#### PRODUCT FEATURES

- 80%+ energy savings and less heat generation vs legacy equivalents
- 15,000 hr lifetime means fewer replacements and lower maintenance costs
- Smooth diffused lens for comfortable, glare free performance
- Durable plastic housing for lower risk of breakage
- ANSI compliant construction ensures fit for intended applications
- UL Certified
- Suitable for use in totally enclosed fixtures
- Suitable for dry and damp locations
- Suitable for use with dimmers (*See compatibility sheet for comprehensive list of approved dimmers*)
- PF > 0.90
- Operating temperature range: 4°F/-20°C to 104°F/40°C
- Complies with FCC Part 15

#### PERFORMANCE SPECIFICATIONS OVERVIEW

Catalog Number	Rated Lamp Wattage	Preset CCT	Lumens	Efficacy	Input Voltage	Dimming	CRI	Base Type	Beam Angle	Legacy Equivalent Wattage
KT-LED14A19-O-9CSF /G4	14W	2700K	1600	114 lm/W	120V	Yes	>90	E26	220°	100W
KT-LED12A19-O-9CSF /G4	12W	2700K	1100	92 lm/W						75W
KT-LED9A19-O-9CSF /G4	9W	2700K	800	89 lm/W						60W
KT-LED5A19-O-9CSF /G4	5W	2700K	450	90 lm/W						40W



# ESSENTIAL SERIES

GENERAL PURPOSE LED BULBS



## KT-LEDXXA19-O-9CSF /G4

GENERAL PURPOSE LED LAMP


**PERFORMANCE SPECIFICATIONS DETAILED**

Catalog Number	Rated Lamp Wattage	Selectable CCT	Lumens	Efficacy	Input Voltage	Dimming	CRI	Base Type	Beam Angle	Legacy Equivalent Wattage
KT-LED5A19-O-9CSF /G4	5W	2700K	450	90 lm/W	120V	Yes	>90	E26	220°	40W
		3000K								
		3500K								
		4000K								
		5000K								
KT-LED9A19-O-9CSF /G4	9W	2700K	800	89 lm/W	120V	Yes	>90	E26	220°	60W
		3000K								
		3500K								
		4000K								
		5000K								
KT-LED12A19-O-9CSF /G4	12W	2700K	1100	92 lm/W	120V	Yes	>90	E26	220°	75W
		3000K								
		3500K								
		4000K								
		5000K								
KT-LED14A19-O-9CSF /G4	14W	2700K	1600	114 lm/W	120V	Yes	>90	E26	220°	100W
		3000K								
		3500K								
		4000K								
		5000K								


**KT-LEDXXA19-O-9CSF /G4**  
GENERAL PURPOSE LED LAMP

**PHYSICAL SPECIFICATIONS**

KT-LED5A19-O-9CSF /G4  
KT-LED9A19-O-9CSF /G4

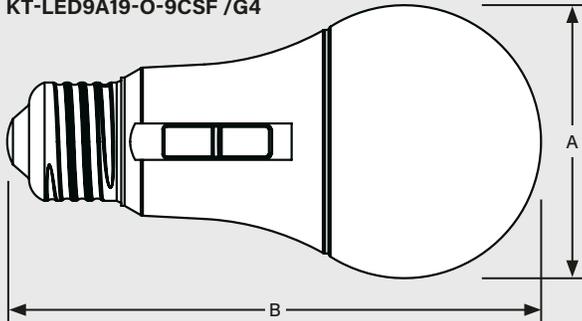

KT-LED12A19-O-9CSF /G4  
KT-LED14A19-O-9CSF /G4

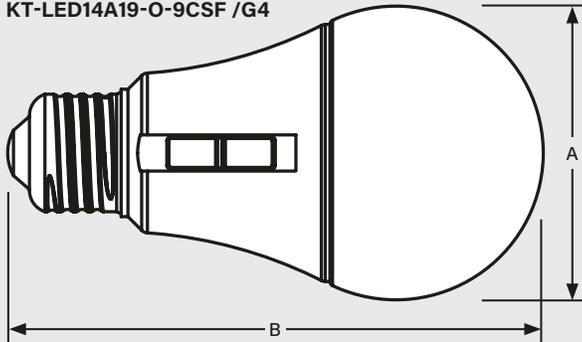

Lamp Dimensions		
Catalog Number	KT-LED5A19-O-9CSF /G4 KT-LED9A19-O-9CSF /G4	KT-LED12A19-O-9CSF /G4 KT-LED14A19-O-9CSF /G4
A (Diameter)	2.36"	2.56"
B (Length)	4.61"	4.65"

BASE TYPE: E26 (Medium)

Packaging Dimensions		
Catalog Number	KT-LED5A19-O-9CSF /G4 KT-LED9A19-O-9CSF /G4	KT-LED12A19-O-9CSF /G4 KT-LED14A19-O-9CSF /G4
Carton Quantity	50 pcs	50 pcs
Carton Dimensions	12.60" x 12.48" x 10.31"	13.58" x 13.46" x 10.31"

Packaging Weight	
Catalog Number	Carton Weight
KT-LED5A19-O-9CSF /G4	7.61 lbs
KT-LED9A19-O-9CSF /G4	7.63 lbs
KT-LED12A19-O-9CSF /G4	9.39 lbs
KT-LED14A19-O-9CSF /G4	9.77 lbs

**ORDERING INFORMATION**

Catalog Number	UPC	Easy Code
KT-LED5A19-O-9CSF /G4	843654175843	OSV-25
KT-LED9A19-O-9CSF /G4	843654175874	XWI-27
KT-LED12A19-O-9CSF /G4	843654175904	ZDE-62
KT-LED14A19-O-9CSF /G4	843654175935	KUL-04

**CATALOG NUMBER BREAKDOWN**

**KT-LEDXXA19-O-9CSF /G4**

1 2 3 4 5 6 7 8 9

- 1 Keystone Technologies
- 2 LED Lamp
- 3 Wattage
- 4 Lamp Shape
- 5 Omni-Directional

- 6 90 CRI
- 7 Color Select
- 8 Color Select Designation
- 9 Generation 4

**3 Wattage**

5	5W
9	9W
12	12W
14	14W

**8 Color Select Designation**

F	2700/3000/3500/4000/5000K
---	---------------------------