

shown in Polished Copper with metal blades and safety cage



Jarold Direcional

Designed in 2007



Unique and versatile, the fan head of the Jarold Direcional ceiling fan can be infinitely positioned in a 180-degree arc, forward and reverse, to provide maximum, directional airflow. The Jarold can be hung in small, awkward spaces or in front of HVAC ducts to make more efficient the heating, ventilation or air conditioning of any room. Constructed of cast aluminum, heavy spun and stamped steel, the Jarold Direcional carries a limited lifetime warranty.

Product Features

 American Labor	 Hand Made	 AC Motor	 180° Adjustable	 Safety Cage Compatible	 Damp Location	 Soothing White Noise	 Wall Control	 Unipack Shipping
---	--	---	--	---	---	---	---	---



JAROLD DIRECIONAL

FINISH AND BLADE OPTIONS

SKU#	JD-XXXXXX-XX (Model+Finish+Blade)	
Standard Finishes	Black Bronzette Brushed Nickel	BK BZZT BN
Special Order	Brushed Brass Brushed Copper Polished Brass Polished Chrome Polished Copper Polished Chrome Damp Brushed Nickel Damp Gloss White	BRBR BRCP PB CR CP CRDAMP BNDAMP WH
Fan Blade	Wood Blade Metal Blade	WD MTL


TECHNICAL SPECS

Fan Weight	7 lbs	
Voltage	110 or 220	
Motor Type	AC	
Oscillation	No	
Downrods Lengths <i>Field cuttable. Non-threaded</i>	inches: 5, 10, 20, 30 centimeters: 13, 25, 51, 76	
Downrod Diameter	.75 inch	
Overall Drop	Metal Blades:	13 inches / 33 cm + downrod length
	Wood Blades:	16 inches / 41 cm + downrod length
Environment	Damp location with protective powder or clear coat only. Neither coastal, saltwater nor chlorine compatible.	
Ambience	Soothing White Noise	
Safety Certification	UL / CUL	
Warranty	Limited Lifetime	

NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA

Fan Head Options	Solid Mahogany Wood	Metal with Guard
Fan Diameter	16 inches / 41 cm	13 inches / 33 cm
Fan Blade Diameter	16 inches / 41 cm	13 inches / 33 cm
Guard Options	No Cage Option	Decorative Cage or Safety Cage with tight tines
RPM (Low / High)	955 / 1318	615 / 1149
CFM (Low / High)	1701 / 2368	800 / 1162
Watts (High)	46.77	48.39
CFM/Watt (High)	50.63	24.01
Blade Pitch	19°	31°

STANDARD EQUIPMENT

One downrod of 10 inches / 13 cm	
Flat ceiling canopy (Not compatible with vaulted ceiling canopy)	
Decora-style, 3-speed wall control in white	

shown in Polished Copper with wood blades



shown in Brushed Brass with wood blades



shown in Polished Chrome with metal blades and decorative cage




shown in Bronzette with wood blades



shown in Bronzette with metal blades



Standard Finishes




Special Order Finishes



Jarold Direcional

TECHNICAL SPECIFICATIONS

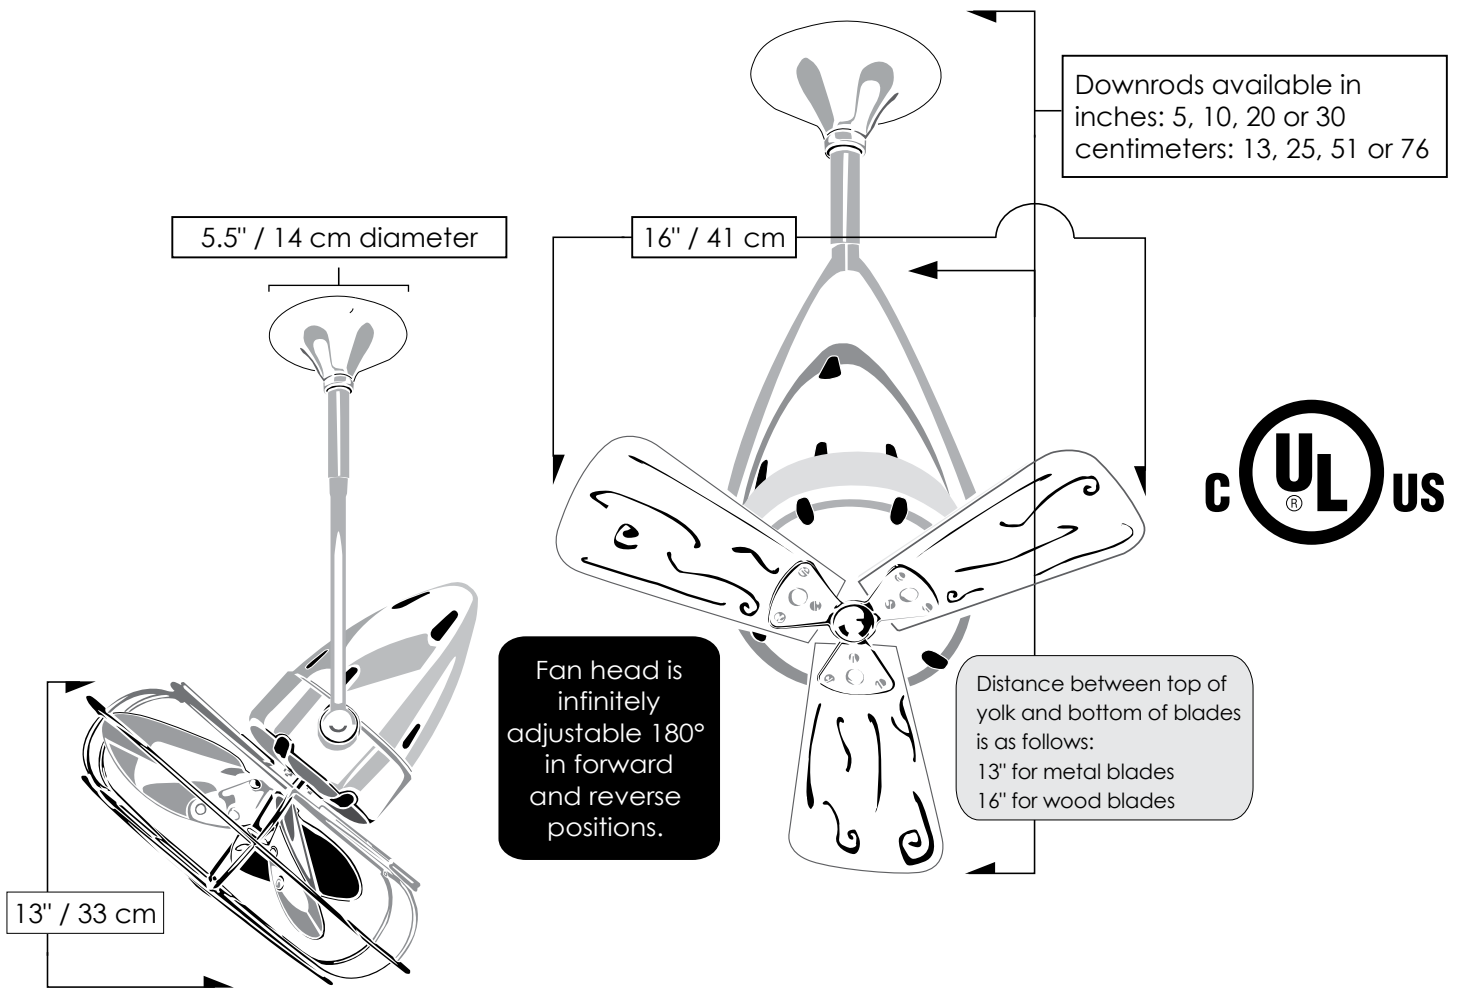

CEILING PITCH TABLE

0/12	0 degrees
1/12	4.76 degrees
2/12	9.46 degrees
3/12	14.04 degrees
4/12	18.43 degrees
5/12	22.62 degrees
6/12	26.57 degrees
7/12	30.26 degrees
8/12	33.69 degrees
9/12	36.87 degrees
10/12	39.81 degrees
11/12	42.51 degrees

CEILING HEIGHT / DOWNROD TABLE

Ceiling Height	Downrod Lengths <i>Field cuttable. Non-threaded</i>
10 ft or less	5 inches / 13 cm <i>Use safety cages if applicable</i>
10 -12 feet	10 inches / 25 cm
13 feet	20 inches / 51 cm
14 feet	30 inches / 76 cm

Matthews Fan Company

1881 Industrial Drive
Libertyville, IL 60048
Tele: 847.680.9043
Fax: 847.680.8140
www.matthewsfanco.com

© 2020 Matthews Fan Company. All rights reserved.

