



Catalog Number See Table
 UPC Number
 Description Masonry Push Tie Mount



Features

- Durable Nylon 6/6 Material
- Ribbed Shaft for Extra Holding Strength
- Slotted Head To Accommodate Cable Tie
-

General

Material: Nylon 6/6
 Flammability: UL94V-2

Dimension Information

Length: See Table
 Width: See Table
 Bundle Dia: See Table

Specifications


Temperature Rating Negative 40 to 185⁰ F
 Voltage Rating 600
 Flammability Rating UL 94V-2

Packaging

Bag Qty 100

Certifications


UL
 CSA
 ROHS

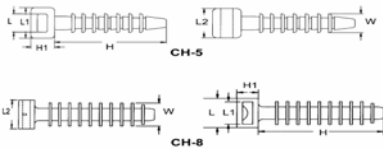

Cat No.	Length (L)	L1 Cable Tie	Length (L2)	Height (H)	Height (H1)	Width (W)	Bag Qty	Master Bag Qty	
20346	.38"	.23"	.37"	.96"	.24"	.24"	100	1000	
20348	.50"	.38"	.49"	1.46"	.25"	.39"	100	1000	

www.morrisproducts.com

Morris Products 53 Carey Road, Queensbury, NY 12804

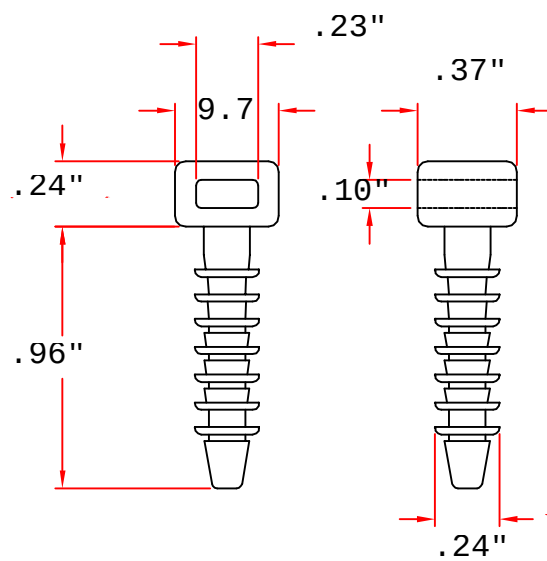

Morris Products
Queensbury NY

MATERIAL: UL 94V-2
NYLON 66

ITEM NO. 20346

SCALE

FINISH

NAME

Masonry Push Mount



(. .)

TOLERANCE $\pm$.002"



11-18-2003
DATE

REVISIONS K001

R.NO.