

PROJECT NAME: _____

CAT. #: _____

NOTES: _____

FIXTURE SCHEDULE: _____

LED High Lumen Filament Bulb

Enhanced Series

Product Description

MaxLite's LED High Lumen Filament Bulbs are high-output LED replacement designed for use in enclosed and recessed residential fixtures. These lamps combine the efficiency and extended service life of LED technology with the familiar size, appearance, and light distribution of traditional HID lamps. Using advanced LED filament technology in a full glass bulb, they deliver dependable and consistent performance and support simple, straightforward retrofit for indoor and outdoor residential applications.

Features

- Wattage Selectable
- CCT Selectable (20W, 23W, 26W - EX39 Base only)
- TRIAC Dimmable
- 50,000 hour life (L70 standards)
- EX39 base

Stocked Items


ORDER CODE	MODEL NUMBER
114230	EF20-ED28-WCS-EX39
114231	EF35-ED28-30-WS-EX39
114232	EF35-ED28-40-WS-EX39
114233	EF35-ED28-50-WS-EX39
114234	EF60-ED37-30-WS-EX39
114235	EF60-ED37-40-WS-EX39
114236	EF60-ED37-50-WS-EX39



20W/23W/26W
EX39 Base



35W/40W/45W
EX39 Base

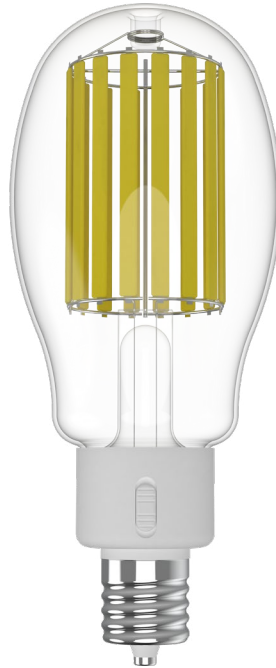

60W/68W/75W
EX39 Base

Ordering Structure

SERIES	WATTAGE	FAMILY	CCT	BASE
EF = Enclosed Post Top Filament	20 = Selectable: 20W/23W/26W	-ED28 = ED28 Shape	-WCS = Wattage & CCT Selectable 3000K/4000K/5000K	-EX39 = EX39 Base
	35 = Selectable: 35W/40W/45W		-30-WS = 3000K, Wattage Selectable	
	60 = Selectable: 60W/68W/75W	-ED37 = ED37 Shape	-40-WS = 4000K, Wattage Selectable -50-WS = 5000K, Wattage Selectable	

FCC Statement

NOTE: This equipment has been tested and found to comply with the limits for a class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna. Increase the separation between the equipment and receiver.
- Connect the equipment to an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

LED High Lumen Filament Bulb

Enhanced Series

Specifications

Specifications	EF20-ED28-WCS-EX39	EF35-ED28-XX-WS-EX39	EF60-ED37-XX-WS-EX39
Family, Base Type	ED28, EX39 Base		ED37, EX39 Base
Input Wattage (W)	20W, 23W, 26W	35W, 40W, 45W	60W, 68W, 75W
Lumens Delivered (lm)	3500 lm, 4000 lm, 4500 lm	7000 lm, 7800 lm, 8700 lm	11000 lm, 13000 lm, 14000 lm
Nominal Efficacy (lm/W)	173 lm/W	178 lm/W	187 lm/W
Equivalent Wattage (W)	50W, 70W, 100W Metal Halide	150W, 250W, 320W Metal Halide	320W, 400W, 450W Metal Halide
CCT	3000K, 4000K, 5000K		
CRI	≥80		
Calculated L70 Lumen Maintenance	50,000 hours		
Distribution	300°		
Dimming Technology	TRIAC		
Dimming Range	Dimmable, 10%-100%		
Input Voltage	120-277V AC, 60Hz		
Power Factor	≥0.9		
Lens	Glass		
Operating Temperature	-13°F to 122°F (-25°C to 50°C)		
Certifications	cETLus listed, FCC, RoHS		
Environment	Wet Locations, Enclosed and Recessed Fixtures		
Warranty	5 Year warranty. Check maxlite.com/warranties for details.		
Case Qty	6 pcs.		

Compatible Dimmers

BRAND	DIMMER MODELS
Leviton SureSlide	6674
Leviton	DSM10
Lutron	DVCL-153P
Lutron	DVLV-600P
Lutron Maestro C-L	MACL-153M

Dimensions

MODEL	L (INCHES)	W (INCHES)
EF20-ED28-WCS-EX39	10.00	3.54
EF35-ED28-XX-WS-EX39	10.00	3.54
EF60-ED37-XX-WS-EX39	11.22	4.72

