

PROJECT:

SCHEDULE:

DATE:

PREPARE BY:

NOTES:

DESCRIPTION

naturaLED® BarnYard fixtures are an excellent replacement for the traditional HID BarnYard fixtures. They offer great energy savings while delivering brilliant illumination quality. naturaLED® BarnYard fixtures feature a Photocell sensor built-in and IP65 Rated with an optional 16-inch extension arm.



Optional 16-inch Extension Arm Available

APPLICATIONS

Alleyways, parking lot, security, pole barn, street, area, driveway lighting



Photocell Sensor built-in

Rated Life 50,000 Hours
Warranty 5 Years

FEATURES

- Energy Star
- IP65 Rated
- ETL Listed
- Built-in photocell
- ColorTemp: 4000K
- Input line voltage: 120-277V
- Power Factor: >0.9
- Surge Protection: 25W =1KV / 40W=3.7KV
- CRI: 80
- Operating temperature: (25W) -22°F - 131°F / (40W) - 4°F-122°F
- Recommended 15-30 foot height performance
- Material: (25W)Polycarbonate / (40W) Die cast aluminum
- Net Weight: (25W) 1.5lbs / (40W) 4.95lbs
- Optional Accessory: 16" extension arm
- 5 Year Warranty
- Finish: Black

ACCESSORIES



Extension arm

SAMPLE NUMBER LED-FXSECSD25/40K

STYLE	FAMILY	SERIES	WATTAGE	COLOR TEMP
LED	FX	SECSD	25	40K
led lighting	fixture	security barn lights	25 watt	4000K



BARN LIGHT (SECD/SECSD)

WALL & SECURITY LUMINAIRES

ORDERING

Watts (W)	Ordering Code	Description	CCT (K)	Lumens (Lm)	Equiv. Wattage (W)	Color	IP65 Rated	DLC (S/P)
24	*7790	LED-FXSECD25/40K	4000K	2,246	100	Black	•	E
40	*7049	LED-FXSECD40/840	4000K	4,806	200	Black	•	-


*Limited Quantity. Contact your sales rep for more informatoin

ACCESSORIES (Ordered Separately)



Extension Arm
P10054 MT-DEA16


(Dusk to Dawn 16" Extension Arm Pole)



DIMENSIONS


24W (SECD)

1.50-lbs

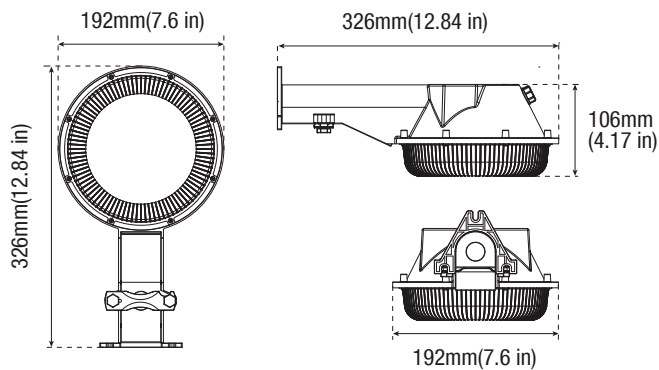


40W (SECD)

4.95-lbs

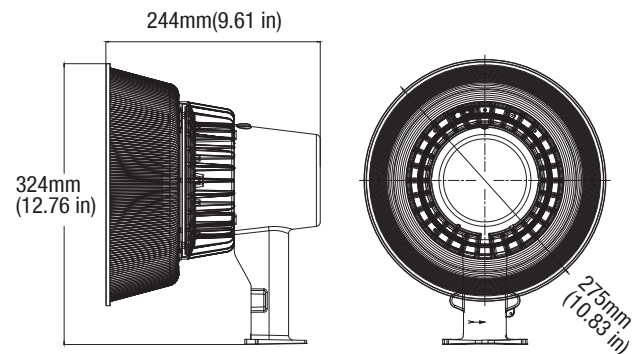

PHOTOMETRICS CHART


24 Watt Energy Star



	Center Beam fc	Beam Width
2.5R	160 fc	5.0 ft
5.0R	40.0 fc	10.0 ft
7.5R	17.8 fc	15.0 ft
10.0R	10.0 fc	20.0 ft
12.5R	6.40 fc	25.0 ft
15.0R	4.45 fc	30.0 ft

Vert. Spread: 90.0°
Horiz. Spread: 90.4°

40 Watt



	Center Beam fc	Beam Width
2.5R	371 fc	4.9 ft
5.0R	92.8 fc	9.8 ft
7.5R	41.2 fc	14.8 ft
10.0R	23.2 fc	19.7 ft
12.5R	14.8 fc	24.6 ft
15.0R	10.3 fc	29.5 ft

Vert. Spread: 89.1°
Horiz. Spread: 83.4°

PACKAGE

Case Qty 1 pc

