

PROJECT:

SCHEDULE:

DATE:

PREPARE BY:

NOTES:

DESCRIPTION


naturaLED® Commercial Wrap (CWS) now offers the perfect solution for your lighting needs. The Commercial utility wrap fixtures are designed for saving energy and easy installation. Available in 4,000K; delivering up to 5,275 lumens with excellent and consistent color. Our Commercial Utility Wrap features a full wrap-around UV coated PS plastic prismatic lens and is 48 inches long; designed for junction box installation and works great in parking garages, stairwells, offices, hallways, industrial, commercial and residential, ceiling or wall mounted. This fixture is versatile and efficient.

APPLICATIONS

Conference/Meeting Room, Stairwells, Schools/ Universities, Hospitals, Hotels, Parking Garages

FEATURES

- DLC Premium
- Damp Location
- ETL Listed
- Lightweight for easy installation
- Excellent thermal design
- Uniform and consistent color
- UV coated frosted polycarbonate
- Color Temperature: 4000K
- Input line voltage: 120-277V
- Input Current: 0.34A
- CRI: 80
- Powerfactor >0.9
- Dimmable: 1-10V
- Operating temperature: -22°F - 122°F
- 5 Year Warranty

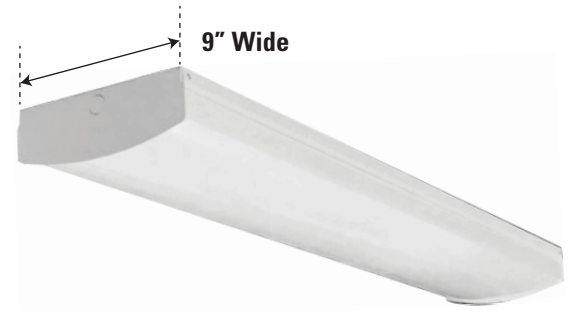

Rated Life 50,000 Hours
Warranty 5 Years

ACCESSORIES



Emergency Driver



Motion/ Daylight Sensor



Wire Guard

SAMPLE NUMBER LED-FXCWS38/48FR/840

STYLE	FAMILY	SERIES	WATTAGE	LENGTH/ LENS	CRI/COLOR TEMP
LED led lighting	FX fixture	CWS commercial wrap	38 <38 watt	48FR 48" frosted	840 CRI 80 4000K



COMMERCIAL WRAP

CEILING LUMINAIRES

ORDERING

*P= Premium DLC / *S = Standard DLC

Watts (W)	Ordering Code	Description	CCT (K)	Lumens (Lm)	Equiv. Wattage (W)	Size	Damp Location	DLC (S/P)
36	9289	LED-FXCWS38/48FR/840	4000K	5,275	4 x32WT8	9" x48"	•	P

ACCESSORIES (Ordered Separately)



Emergency Driver
7334 BAEM15-48BC/MV-A
(Emergency driver)



Motion/ Daylight Sensor
P10234 SEN-MC605V-D
(Microwave Sensor)




Wire Guard
P10252 WG-CWS/48/WH
(Wireguard)



LENS
P10317 LENS-CWS38/4FT
(Replacement Lens for CWS)


DIMENSIONS

36W (48-inch)
8.4-lbs

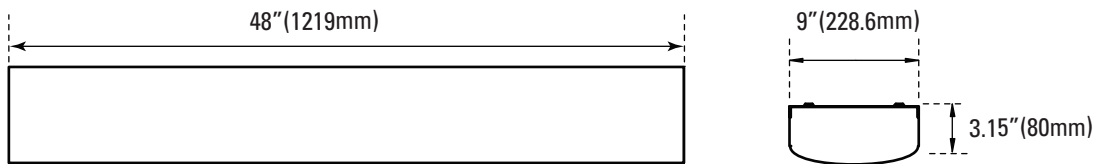

PHOTOMETRICS CHART

36W (48-inch)



Center Beam fc	Beam Width	Beam Diameter
2.5R	285 fc	6.0 ft 7.3 ft
5.0R	71.4 fc	12.0 ft 14.5 ft
7.5R	31.7 fc	18.0 ft 21.8 ft
10.0R	17.8 fc	24.0 ft 29.1 ft
12.5R	11.4 fc	30.1 ft 36.3 ft
15.0R	7.93 fc	36.1 ft 43.6 ft

■ Vert. Spread: 100.5°
■ Horiz. Spread: 110.9°

PACKAGE

Case Qty
1 pc

