

SWP ADJUSTABLE SLIM WALL PACK

DESCRIPTION

naturaLED[®] slim, low-profile cutoff wall pack with the smooth contemporary design. Well-engineered, high-quality die-cast aluminum, delivering bright, crisp light. The excellent thermal design ensures our SWP's performance over rated life. Installation is made simple and easy with an adjustable angle and hinged junction box. Our Slim Wall Packs are available in 15W, 28W and 45W with color options of Black and Bronze. Optional 3/4" knuckle-mount, adjustable swivel bracket or slip fitter provides you the flexibility for your application. SWP is ideal for landscape, wall/surface, low-level pathway, apartment buildings, schools and multi-use facilities.

APPLICATIONS

Security, Pathway, Perimeter, Entryway, Area Lighting, and building facades

FEATURES

- DLC Premium
- IP65 Rated
- ETL Listed
- ADA Compliance (4" Depth)
- Adjustable fixture angle
- 1/2" NPT Knock Out
- Dimmable: 1-10V (28W/45W)
- Input Line Voltage: 120-277V
- Beam Angle: 140°
- CRI: >80
- Surge Protection: 15W= 2KV, 28/45W= 4KV
- Material: Die Cast Aluminum
- Corrosion Resistant Powder Coating
- Photocell Sensor Compatible
- Operating Temperature: -22°F - 122°F
- 5 Year Warranty
- Finish: Dark Bronze / Black
- Optional for Purchase: Photocell Sensor, Mounting: Slip Fitter, Swivel Bracket, 3/4" NPT Knuckle Mount

PROJECT:

SCHEDULE:

DATE:

PREPARE BY:

NOTES:







Adjustable Angle



Rated Life 50,000 Hours
Warranty 5 Years

ACCESSORIES

	Photocell Sensor
	Slip Fitter
	Swivel Bracket
	Knuckle Mount

SAMPLE NUMBER LED-FXSWP15/840/DB

STYLE	FAMILY	SERIES	WATTAGE	CRI/COLOR TEMP	FINISH COLOR
LED	FX	SWP	15	840	DB
LED Lighting	Fixture	Slim Wall Pack	15 Watt	CRI 80 4000K	Dark Bronze



ADJUSTABLE SLIM WALL PACK

WALL & AREA LUMINAIRES

ORDERING

*P= Premium DLC / *S = Standard DLC

Watts (W)	Ordering Code	Description	CCT (K)	Lumens (Lm)	Equiv. Wattage (W)	Dim (V)	Depth*	Color	IP65 Rated	DLC (S/P)
15	9301	LED-FXSWP15/840/DB	4000K	2,001	100	-	4"	Dark Bronze	•	-
15	9302	LED-FXSWP15/850/DB	5000K	2,062	100	-	4"	Dark Bronze	•	-
15	9307	LED-FXSWP15/840/BK	4000K	2,001	100	-	4"	Black	•	-
15	9308	LED-FXSWP15/850/BK	5000K	2,062	100	-	4"	Black	•	-
28	9303	LED-FXSWP28/840/DB	4000K	3,418	175	1-10V	4"	Dark Bronze	•	P
28	9304	LED-FXSWP28/850/DB	5000K	3,513	175	1-10V	4"	Dark Bronze	•	P
28	9309	LED-FXSWP28/840/BK	4000K	3,418	175	1-10V	4"	Black	•	P
28	9310	LED-FXSWP28/850/BK	5000K	3,513	175	1-10V	4"	Black	•	P
45	9305	LED-FXSWP45/840/DB	4000K	5,539	250	1-10V	4"	Dark Bronze	•	P
45	9311	LED-FXSWP45/840/BK	4000K	5,539	250	1-10V	4"	Black	•	P
45	9312	LED-FXSWP45/850/BK	5000K	5,680	250	1-10V	4"	Black	•	P

*Accessible for Americans with Disability Act

ACCESSORIES (Ordered Separately)

Slip Fitter



P10076 MT-SF-SWP/DB
(Slip Fitter Dark Bronze)



P10007 MT-SF-SWP/BK
(Slip Fitter Black)



Knuckle Mount



P10075 MT-KNC-SWP/DB
(3/4" NPT Knuckle Dark Bronze)



P10006 MT-KNC-SWP/BK
(3/4" NPT Knuckle Black)



Swivel Bracket



P10074 MT-SB-SWP/DB
(Swivel Bracket Dark Bronze)




P10005 MT-SB-SWP/BK
(Swivel Bracket Black)



Photocell Sensor



P10036 SEN-PHO-BT-MT/MV
(Button Photocell 120-277V)

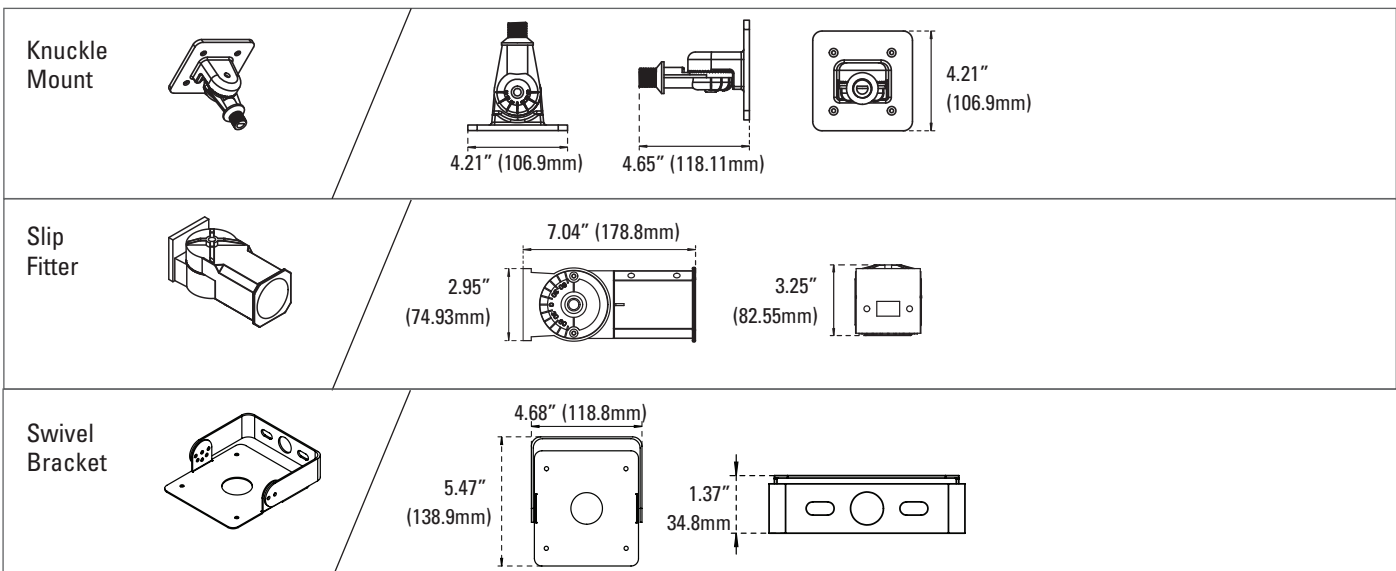


ADJUSTABLE SLIM WALL PACK

WALL & AREA LUMINAIRES


DIMENSIONS

15W / 28W / 45W
5.45-lbs

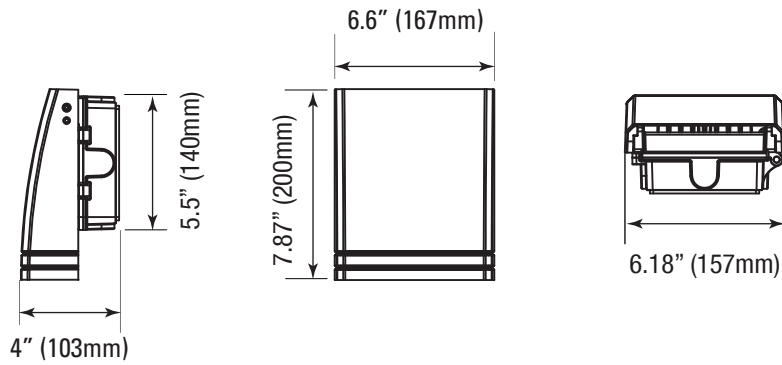

PHOTOMETRICS CHART


15 Watt



Center Beam fc	Beam Width	Beam Height
117 fc	5.3 ft	6.0 ft
29.2 fc	10.6 ft	13.5 ft
13.0 fc	15.8 ft	20.3 ft
7.31 fc	21.1 ft	27.0 ft
4.68 fc	26.4 ft	33.8 ft
3.25 fc	31.7 ft	40.5 ft

Vert. Spread: 93.1°
Horiz. Spread: 107.0°


28 Watt DLC Premium



Center beam fc	Beam Width	Beam Height
206 fc	4.2 ft	6.3 ft
51.6 fc	8.5 ft	12.6 ft
22.9 fc	12.7 ft	18.9 ft
12.9 fc	17.0 ft	25.2 ft
8.25 fc	21.2 ft	31.6 ft
5.73 fc	25.5 ft	37.9 ft

Vert. Spread: 80.7°
Horiz. Spread: 103.2°

45 Watt DLC Premium



Center beam fc	Beam Width	Beam Height
286 fc	3.6 ft	5.4 ft
71.6 fc	7.2 ft	10.9 ft
31.8 fc	10.8 ft	16.3 ft
17.9 fc	14.4 ft	21.7 ft
11.5 fc	18.0 ft	27.2 ft
7.96 fc	21.6 ft	32.6 ft

Vert. Spread: 71.6°
Horiz. Spread: 94.8°

PACKAGE

Case Qty 5 pcs

