

DLR/DLS SLIM DISK LIGHT CCT5

PROJECT: _____

SCHEDULE: _____ DATE: _____

PREPARE BY: _____

NOTES: _____

DESCRIPTION

Introducing our ultra-low profile selectable CCT LED downlight with matte white flange and die-cast aluminum construction for durability. This down slim light can accommodate dimmable LED lamp for delivering a light output up to 900+ lumens with 5 selectable color temperature (2700K,3000K,3500K,4000K,5000K) and CRI 90. Shaped in round and square downlight has a trim of 4-inch and 6-inch with high impact diffused lens shade for even light distribution. It is suitable for wet locations.

APPLICATIONS

Kitchen, decoration, hallway, bedroom, ceiling mount lighting




FEATURES


- Energy Star Qualified
- Suitable for wet location
- Ultra slim design for dry wall (no recessed can needed)
- 4" / 6" round or square design
- IC rated
- ETL listed
- JA8/Title 24
- Selectable CCT: 2700K, 3000K, 3500K, 4000K, 5000K
- Voltage: 120V
- Power Factor: >0.9
- Input current: 0.1-0.12A
- Dimmable
- CRI: 90
- Beam Angle: Flood 110°
- Recommended ceiling height at 9-10ft
- Operating temperature: 5°F - 104°F
- Finish Color: White

EASY INSTALLATION

Snap-in mounting springs and easy wiring access for quick installation

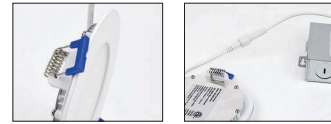

STYLES

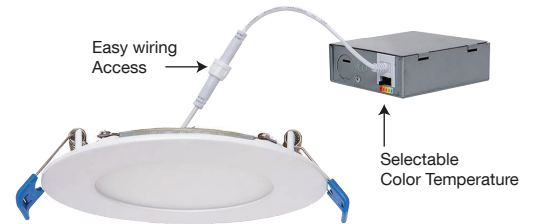

SAMPLE NUMBER LED4DLR-65L9CCT5

STYLE	DIAMETER	SERIES	LUMENS	CRI	COLOR TEMP
LED	4	DLR	65L	9	CCT5
led lighting	4 inch	slim disk light round	650+	CRI 90	selectable color temperature (2700K,3000K,3500K, 4000K, 5000K)
		DLS			
		slim disk light square			



SLIM DISK LIGHT CCT5

CEILING LUMINAIRES

ORDERING

Watts (W)	Ordering Code	Description	CCT (K)	Lumens (Lm)	Size	Equiv. Wattage (W)	Energy Star
10	9361	LED4DLR-65L9CCT5	27/30/35/40/5000K	650/ 680/ 710/ 715/ 700	4" Round	60	•
10	9362	LED4DLS-65L9CCT5	27/30/35/40/5000K	650/ 680/ 710/ 715/ 700	4" Square	60	•
12	9363	LED6DLR-90L9CCT5	27/30/35/40/5000K	900/ 940/ 970/ 990/ 960	6" Round	100	•
12	9364	LED6DLS-90L9CCT5	27/30/35/40/5000K	900/ 940/ 970/ 990/ 960	6" Square	100	•

ACCESSORIES (Ordered Separately)



Plate for 4" Disk Light
P10308 PLT-NC/4DL
(4" Round Pre-Mounting Plate)



Plate for 6" Disk Light
P10309 PLT-NC/6DL
(6" Round Pre-Mounting Plate)






Plate for 2" / 4" / 6" Disk Light
P10310 PLT-NC/DL/UNV
(Universal Plate for new construction
2/4/6" Disk Light)

DIMENSIONS


4" - Round 0.90-lbs

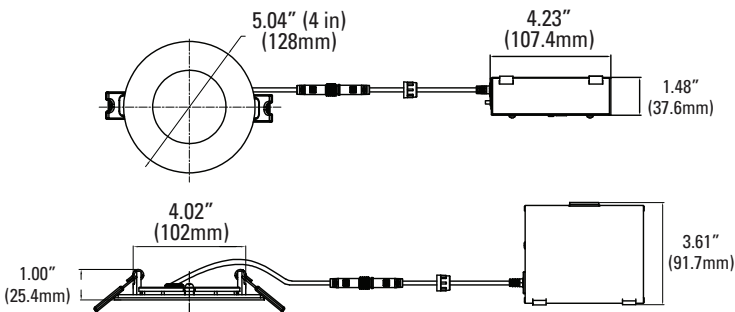


4" - Square 1.00-lbs

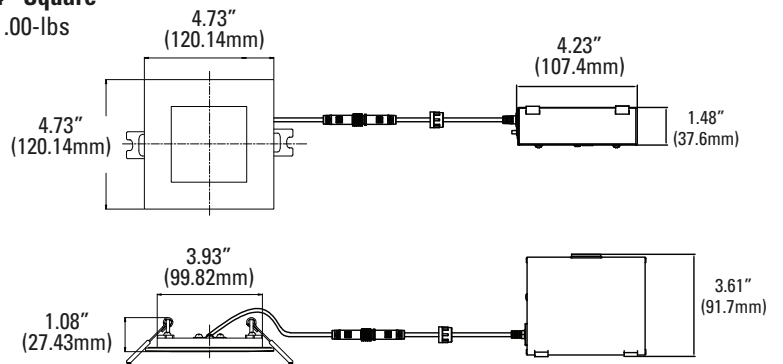

6" - Round 1.21-lbs

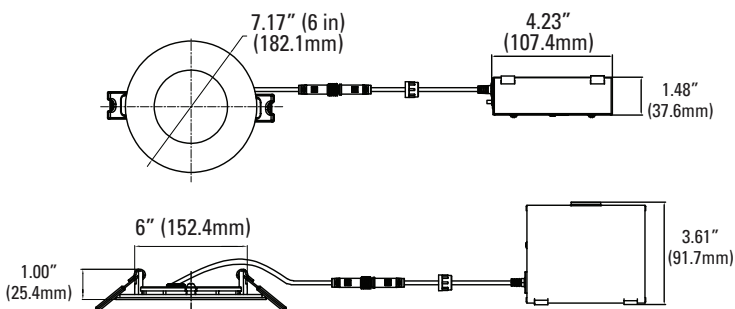


6" - Square 1.43-lbs

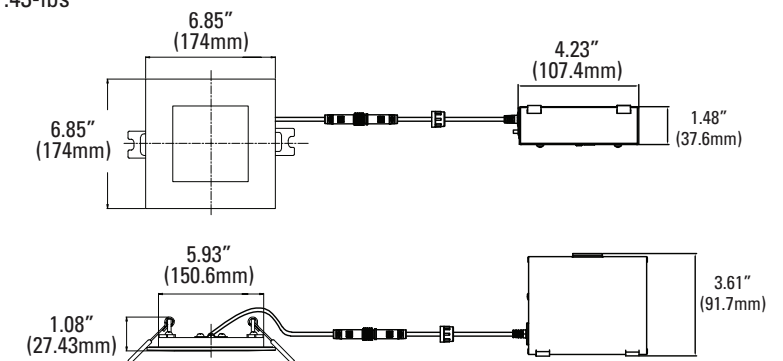

PHOTOMETRICS CHART


4-inch Round Energy Star

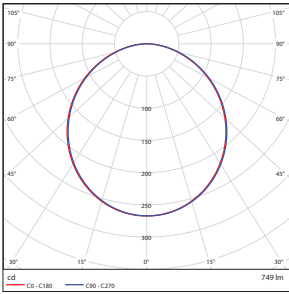

Illuminance at a Distance			
	Center Beam fc	Beam Width	
1.7ft	92.4 fc	4.9 ft	4.9 ft
3.3ft	24.5 fc	9.5 ft	9.5 ft
5.0ft	10.7 fc	14.4 ft	14.3 ft
6.7ft	5.95 fc	19.2 ft	19.2 ft
8.3ft	3.88 fc	23.8 ft	23.8 ft
10.0ft	2.67 fc	28.7 ft	28.7 ft

■ Vert. Spread: 110.3°
■ Horiz. Spread: 110.3°


4-inch Square Energy Star

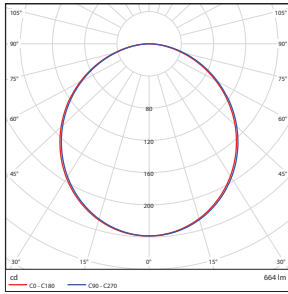

Illuminance at a Distance			
	Center Beam fc	Beam Width	
1.7ft	82.6 fc	4.8 ft	4.8 ft
3.3ft	21.9 fc	9.4 ft	9.4 ft
5.0ft	9.54 fc	14.2 ft	14.3 ft
6.7ft	5.31 fc	19.1 ft	19.1 ft
8.3ft	3.46 fc	23.6 ft	23.7 ft
10.0ft	2.39 fc	28.5 ft	28.5 ft

■ Vert. Spread: 109.8°
■ Horiz. Spread: 109.9°


6-inch Round Energy Star

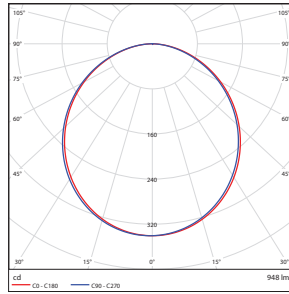

Illuminance at a Distance			
	Center Beam fc	Beam Width	
1.7ft	118 fc	4.8 ft	4.8 ft
3.3ft	31.3 fc	9.4 ft	9.3 ft
5.0ft	13.6 fc	14.2 ft	14.2 ft
6.7ft	7.58 fc	19.0 ft	19.0 ft
8.3ft	4.94 fc	23.6 ft	23.5 ft
10.0ft	3.40 fc	28.4 ft	28.3 ft

■ Vert. Spread: 109.7°
■ Horiz. Spread: 109.5°

6-inch Square Energy Star

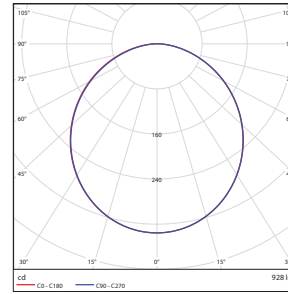

Illuminance at a Distance			
	Center Beam fc	Beam Width	
1.7ft	116 fc	4.8 ft	4.8 ft
3.3ft	30.8 fc	9.3 ft	9.3 ft
5.0ft	13.4 fc	14.1 ft	14.1 ft
6.7ft	7.47 fc	18.9 ft	18.8 ft
8.3ft	4.87 fc	23.4 ft	23.3 ft
10.0ft	3.35 fc	28.2 ft	28.1 ft

■ Vert. Spread: 109.3°
■ Horiz. Spread: 109.2°

PACKAGE

Case Qty 20 pcs

