

SECW SECURITY WALL LIGHTS

PROJECT: _____

SCHEDULE: _____ DATE: _____

PREPARE BY: _____

NOTES: _____

DESCRIPTION

naturaLED® security wall lighting are suitable for wet locations with ratings of IP65. Built-in dusk to dawn photocell sensor, with easy on/off plug if sensor is not in use. Easy installation, gasketing between back plate and front prevents entry of water. Polyester powder-coated finish, rust and corrosion proof, maintenance free throughout the years of usage.




Rated Life 50,000 Hours
Warranty 5 Years

APPLICATIONS

Security, Pathway, Perimeter, Area, Wall Lighting

FEATURES

- DLC Standard
- IP65 Rated
- UL Listed
- Build-in photocell sensor (tun on and off)
- Lightweight
- Color Temp: 4000K, 5000K
- Input line voltage: 120-277V
- Power Factor: >0.9
- Beam Angle: 100°
- CRI: 80
- Operating temperature: - 4°F - 113°F
- Recommended 8-foot height performance
- Material: aluminum housing with PC lens
- 5 Year Warranty
- Finish: Bronze

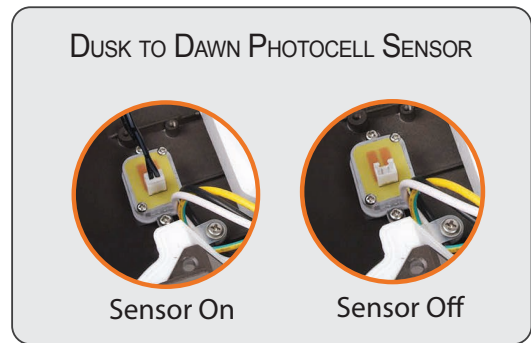

SAMPLE NUMBER FXSECW15/840/DB/MV

| FAMILY | SERIES | WATTAGE | CRI/COLOR TEMP | COLOR | VOLTAGE |
|---------------|--------------------------------|---------------|------------------------|-------------------|------------------------|
| FX fixture | SECW security wall light | 15 15 watt | 840 CRI 80 4000K | DB dark bronze | MV multiple voltage |



SECURITY WALL LIGHTS

WALL & SECURITY LUMINAIRES


ORDERING

*P= Premium DLC / *S = Standard DLC

| Watts (W) | Ordering Code | Description | CCT (K) | Lumens (Lm) | Equiv. Wattage (W) | Included | IP65 Rated | DLC (S/P) |
|-----------|---------------|--------------------|---------|-------------|--------------------|-----------|------------|-----------|
| 15 | 9410 | FXSECW15/840/DB/MV | 4000K | 1,931 | 70 | Photocell | • | S |
| 15 | 9411 | FXSECW15/850/DB/MV | 5000K | 1,954 | 70 | Photocell | • | S |
| 28 | 9412 | FXSECW30/840/DB/MV | 4000K | 3,372 | 100 | Photocell | • | S |
| 28 | 9413 | FXSECW30/850/DB/MV | 5000K | 3,437 | 100 | Photocell | • | S |

DIMENSIONS

15W / 28W
1.98-lbs

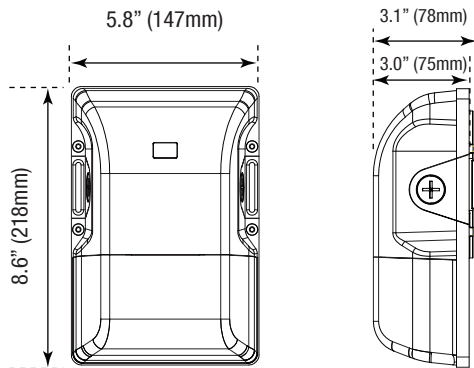




PHOTOMETRICS CHART

PACKAGE

15 Watt
DLC Standard

28 Watt
DLC Standard

Case Qty 10 pcs

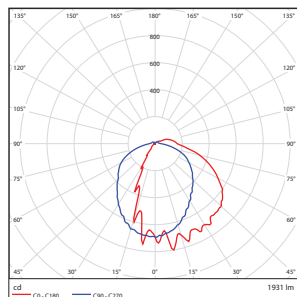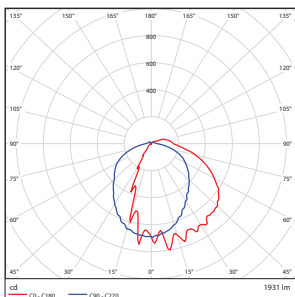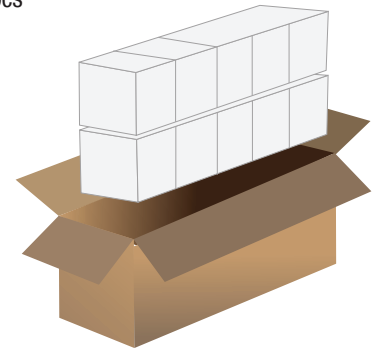

| Center Beam Fc | Beam Width | |
|----------------|------------|---------|
| 15.4 fc | 13.3 ft | 14.0 ft |
| 3.91 fc | 26.4 ft | 27.9 ft |
| 1.73 fc | 39.7 ft | 41.9 ft |
| 0.97 fc | 53.0 ft | 56.0 ft |
| 0.62 fc | 66.1 ft | 69.8 ft |
| 0.43 fc | 79.4 ft | 83.9 ft |

■ Vert. Spread: 89.5°
■ Horiz. Spread: 92.7°

| Center Beam Fc | Beam Width | |
|----------------|------------|---------|
| 29.0 fc | 14.4 ft | 16.5 ft |
| 7.36 fc | 28.6 ft | 32.8 ft |
| 3.26 fc | 43.0 ft | 49.3 ft |
| 1.83 fc | 57.5 ft | 65.8 ft |
| 1.17 fc | 71.7 ft | 82.1 ft |
| 0.81 fc | 86.1 ft | 98.6 ft |

■ Vert. Spread: 94.2°
■ Horiz. Spread: 101.9°