

FMC FLUSH MOUNT COMPACT 7" (CCT5)

PROJECT: _____

SCHEDULE: _____ DATE: _____

PREPARE BY: _____

NOTES: _____

DESCRIPTION

naturaLED® Compact Flush Mounts (FMC) are an excellent replacement solution for traditional incandescent and fluorescent ceiling and wall mounted fixtures. Our FMC series is easy to install, dimmable, and wet location rated. The FMC is available in 2 models; a 3000K version, or CCT5 Selectable: 2700K, 3000K, 3500K, 4000K, 5000K. Perfect for residential, commercial and hospitality applications. Ideal for bathrooms, closets, small rooms, storage areas, hallways and stairways.

APPLICATIONS

Bathroom, Decoration, Hallway, Bedroom, Ceiling Mount

FEATURES

- Energy Star
- Wet Location
- UL/cUL Listed
- Uniform light distribution and consistent color
- Selectable Color Temperature: 2700K, 3000K, 3500K, 4000K, 5000K
- Dimmable: Incandescent dimming
- Input line voltage: 120V
- CRI: 90
- Surge Protection: 2.5KV
- Powerfactor >0.9
- Beam Angle: 120°
- Recommended ceiling height: 8-10ft
- Operating temperature: - 4°F - 104°F
- 5 Year Warranty
- Finish: White



Rated Life 50,000 Hours
Warranty 5 Years

ACCESSORIES (INCLUDED)



Recessed can installation kit

SAMPLE NUMBER		LED7FMC-96L9CCT5			
STYLE	DIAMETER	SERIES	LUMEN	CRI	COLOR TEMP
LED led lighting	7 7 inch	FMC flush mount compact	96L 960 lumens	9 CRI 90	CCT5 5 selectable color temp



FLUSH MOUNT COMPACT 7" (CCT5)

CEILING & AREA LUMINAIRES

ORDERING

Watts (W)	Ordering Code	Description	CCT (K)	Lumens (Lm)	Equiv. Wattage (W)	Size	Wet Location	Energy Star
12	9522	LED7FMC-96L930	3000K	960	100	7"	•	•
12	9523	LED7FMC-96L9CCT5	27/30/35/40/50K	960	100	7"	•	•

ACCESSORIES (INCLUDED)

Installation Kit

(Recessed can installation kit)



Wire Nut X3PCS



For Mounting Plate



Torsion springs



E26 Adapter




Mounting Plate

DIMENSIONS


12W (7-inch)

0.53-lbs

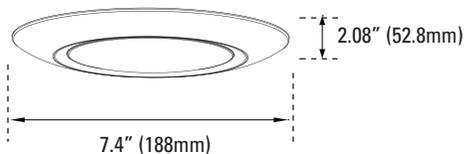

12W (7-inch) CCT5


0.55-lbs

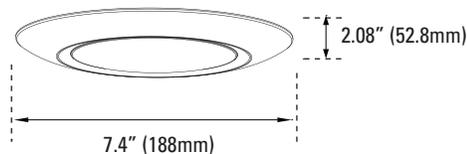

PHOTOMETRIC CHART

12W (7-inch)

Energy Star




Center Beam fc	Beam Width	
1.7R	116 fc	5.1 ft 5.1 ft
3.3R	30.8 fc	9.8 ft 9.9 ft
5.0R	13.4 fc	14.9 ft 15.0 ft
6.7R	7.47 fc	20.0 ft 20.0 ft
8.3R	4.86 fc	24.8 ft 24.8 ft
10.0R	3.35 fc	29.8 ft 29.9 ft

■ Vert. Spread: 112.3°
■ Horiz. Spread: 112.5°

12W (7-inch) CCT5

Energy Star



Center Beam fc	Beam Width	
1.7R	116 fc	5.0 ft 5.1 ft
3.3R	30.8 fc	9.8 ft 9.8 ft
5.0R	13.4 fc	14.8 ft 14.9 ft
6.7R	7.47 fc	19.9 ft 20.0 ft
8.3R	4.87 fc	24.6 ft 24.7 ft
10.0R	3.35 fc	29.6 ft 29.8 ft

■ Vert. Spread: 112.0°
■ Horiz. Spread: 112.3°

PACKAGE

Case Qty

20 pcs

