



Item#: **55091**  
**LED 2X2 CENTER BASKET**  
 2X2 LUMINARIES FOR AMBIENT LIGHTING OF  
 INTERIOR COMMERCIAL SPACES

**FEATURES**

- Indirect lighting reduces shadows and glare.
- Center basket provides soft ambient light.
- Compatible with today's popular ceiling system.
- Use 30% less energy than a linear fluorescent fixture.
- Smooth edges for easy handling.
- Diffusing lens gives soft even lights.

**MOUNTING**

- Recessed ceiling mount.
- Exposed T-grid ceiling.

**APPLICATION**

Ideal for offices, retail, commercial buildings and work areas.

PERFORMANCE DATA

**ELECTRICAL**

Wattage	30W
Voltage	120-277V
Current	0.25A
Power Factor	0.9
Total Harmonic Distortion (THD)	10

**LIGHTING PERFORMANCE**

Lumens	3750
Lumens Per Watt (LPW)	125
Color Temperature (CCT)	4000K
Color Rendering (CRI)	80
R9 (Red Value)	--
R13 (Skin Tones)	--
Beam Angle	120°
Light Distribution	Type VS
BUG Rating (Backlight, Uplight, and Glare)	--
Dimmable Lighting Control	<i>Dimmable</i> 0-10V, Range 10% - 100%

**ENVIRONMENT**

Operating Temperature	-4° ~ 122°F
Suitable Location	<b>DAMP</b>
Ingress Protection Rating	IP40

**LIFESPAN**

Average Life (Hours)	50,000
Warranty (Years)	<b>5</b>

**COMPONENTS**

LED Light Source	--
Driver	--

**CONSTRUCTION**

Housing	24 Gauge Steel
Lens	Acrylic (PMMA)
Base / Power Supply	Hard Wired
Finish	White

**QUALIFICATIONS**

Pending


*Published lumens on LED products are approximate and may vary slightly. • Specifications are subject to change without notice.*

Item#: **55091**  
**LED 2X2 CENTER BASKET**



**DIMENSIONS** (Inches)

Length	23.8"
Width	23.8"
Height	2.1"
Net Weight (Lbs)	6.8

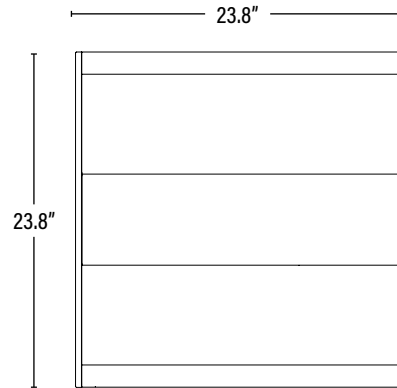

**SUPPORTING DOCUMENTS** (Grey = not available at this time.)

Product Sheet	VIEW
Install Instructions	VIEW
IES Download from Web Item	VIEW
LM79	VIEW
LM80	VIEW

**PACKAGING**

		UPC	DIMENSIONS (LxWxH)	GROSS WEIGHT (Lbs)
Master Carton	2	10811768028918	--	--
Item	1	811768028911	N/A	N/A
Country of Origin	China			
HS Tariff	9405.10.6020			

**ORDERING**

ITEM#	DESCRIPTION	CASE
55091	LED 2X2 CENTER BASKET - 30W/40K/120-277V/DIMMABLE/V2 - SUPERIOR LIFE®	2

**REPLACEMENT PARTS**

--	REPLACEMENT DRIVER	1
----	--------------------	---

ITEM INFORMATION