



Item#: **55094**
LED 2X2 SPEC-SELECT™
CENTER BASKET TROFFER
 2X2 LUMINARIES FOR AMBIENT LIGHTING OF
 INTERIOR COMMERCIAL SPACES

FEATURES

Spec-Select™ Troffers feature adjustable wattage and color temperature for the perfect balance of light in any application.

- Energy efficient
- No flickering

APPLICATION

Ideal for retrofitting inefficient fixtures in malls, hospitals, airports, offices, lobbies and other residential and commercial applications.

ELECTRICAL

Wattage	30W / 35W / 40W
Voltage	120-277V
Current	0.33-0.14A
Power Factor	0.9
Total Harmonic Distortion (THD)	10

LIGHTING PERFORMANCE

Lumens	3960-5000
Lumens Per Watt (LPW)	125
Color Temperature (CCT)	3500K / 4100K / 5000K
Color Rendering (CRI)	82
R9 (Red Value)	--
R13 (Skin Tones)	--
Beam Angle	100°
Light Distribution	Type VS
BUG Rating (Backlight, Uplight, and Glare)	--
Dimmable Lighting Control	<i>Dimmable</i> 0-10V, Range 10% - 100%

ENVIRONMENT

Operating Temperature	-4 ~ 122°F
Suitable Location	DAMP
Ingress Protection Rating	IP40

LIFESPAN

Average Life (Hours)	50,000
Warranty (Years)	5

COMPONENTS

LED Light Source	--
Driver	--

CONSTRUCTION

Housing	Aluminum
Lens	Acrylic (PMMA)
Base / Power Supply	Hard Wired
Finish	White

QUALIFICATIONS

Pending
Published lumens on LED products are approximate and may vary slightly. - Specifications are subject to change without notice.


PERFORMANCE DATA

Item#: **55094**
LED 2X2 SPEC-SELECT™ CENTER BASKET TROFFER



DIMENSIONS (Inches)

Length	23.8"
Width	23.8"
Height	2.1"
Net Weight (Lbs)	6.8

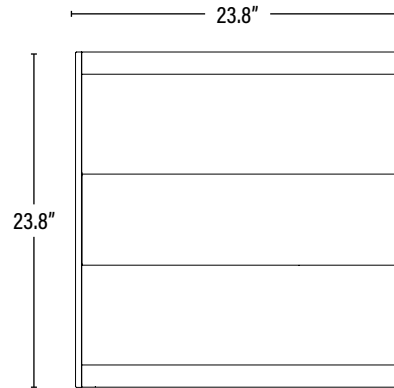

SUPPORTING DOCUMENTS (Grey = not available at this time.)

Product Sheet	VIEW
Install Instructions	VIEW
IES Download from Web Item	VIEW
LM79	VIEW
LM80	VIEW

PACKAGING

		UPC	DIMENSIONS (LxWxH)	GROSS WEIGHT (Lbs)
Master Carton	2	10811768020745	24.5" x 24.4" x 3.3"	10.6
Item	1	811768020748	N/A	N/A
Country of Origin	China			
HS Tariff	9405.10.6020			

ORDERING


ITEM#	DESCRIPTION	CASE
55094	LED 2X2 SPEC-SELECT™ CENTER BASKET TROFFER - 30/35/40W/35-50K/120-277V/DIMMABLE/V2 - SUPERIOR LIFE®	2

REPLACEMENT PARTS

--	REPLACEMENT LED DRIVER	1
----	------------------------	---

ADDITIONAL INFORMATION:

- Default settings; 40W, 5000K.
- The color temperature and wattage may be adjusted by two slide switches integrated into the driver. The color temperature and wattage should be selected prior to installation.



ITEM INFORMATION