

LED DESIGNER STRIPS V2

INSTALL INSTRUCTIONS



PLEASE FIND A QUALIFIED ELECTRICIAN FOR INSTALLATION. Please read the instructions before you install and use the luminaire.

WARNING, CAUTIONS AND OPERATING INSTRUCTIONS

Before installing, servicing, or performing routine maintenance on this equipment; Follow these general precautions:

- To reduce the risk of death, personal injury or property damage from fire, electric shock, falling parts, cuts/abrasions, and other hazards read all warnings and instructions included with and on the fixture box and all fixture labels.
- Commercial installation, service and maintenance of luminaires should be performed by a qualified licensed electrician.
- For the installation: If you are unsure about the installation or maintenance of the luminaires, consult a qualified licensed electrician and check your local electrical code.
- To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.
- Do not make or alter any open holes in an enclosure of wiring or electrical components during kit installation.

WARNING: RISK OF FIRE OR ELECTRICAL SHOCK

- Turn off electrical power at fuse or circuit breaker box before wiring fixture to the power supply.
- Turn off the power when you perform any maintenance.
- Verify that supply voltage is correct by comparing it with the luminaire label information.
- All wiring connections should be capped with UL approved wire connectors.

CAUTION: RISK OF INJURY

- Avoid direct eye exposure to the light source while it is on.
- Account for small parts and destroy packing material, as these may be hazardous to children.

NOTICES:

- Green ground screw is provided in the proper location. **DO NOT RELOCATE.**
- Minimum 90° supply conductors.
- Suitable for Dry or Damp Locations.

! WARNING DISCONNECT POWER BEFORE INSTALLING OR SERVICING.

SURFACE MOUNTING (FIG. 1-3):


1. Secure the provided brackets onto the ceiling using the provided accessories and screws.
2. Screw the covers at the outlet of the back of the housing (Fig. 1).
3. Wire to main power through the J-Box (Fig. 2).
4. Then clip the brackets to the slots of the fixture (Fig. 3).

SUSPENDED CHAIN MOUNTING (FIG. 4):

1. Clip the brackets to the slots of the fixture.
2. Attach the customer supplied V-hooks to the brackets (Fig. 4).
3. Attach the customer supplied chain to the V-Hooks and mounting surface.

LENS INSPECTION: After installation check to make sure the lens is completely secure inside the lamp body and the end cap. Gently pull down on the lens to ensure it does not shift.

Fig. 1



Outlet Box Cover

Fig. 2




Fig. 3


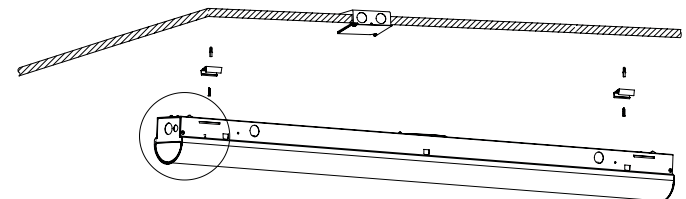


Fig. 4

