



SELECTABLE WATTAGE & CCT

Item#: **55611-8WEM** LED 4' SPEC-SELECT[™] DESIGNER STRIP

DIRECT LINEAR AMBIENT LUMINARIES

FEATURES

Spec-Select[™] Designer Strips feature adjustable wattage and color temperature for the perfect balance of light in any application.

- Energy efficient
- No flickering
- 8W emergency battery pre-installed

APPLICATION

Ideal for larger warehouses, retail applications, commercial buildings and work areas.

ELECTRICAL

ELECTRICAL		
Wattage	34W / 38W / 45W	
Voltage	120-277V	
Current	0.38-0.16A	
Power Factor	0.9	
Total Harmonic Distortion (THD)	10	
LIGHTING PERFORMANCE		
Lumens	4760-5895	
Lumens Per Watt (Lm/W)	131	
Color Temperature (CCT)	3500K / 4100K / 5000K	
Color Rendering (CRI)	82	
R9 (Red Value)	8 / 12 / 7	
R13 (Skin Tones)	84 / 84 / 82	
Beam Angle	130°	
Light Distribution	Very Short, Type II	
BUG Rating (Backlight, Uplight, and Glare)	B2 - U3 - G2	
Dimmable Lighting Control	(Dimmable 0-10V, Range 10% - 100%	
ENVIRONMENT		
Operating Temperature	-4 ~ 113°F	
Suitable Location	DAMP	
Ingress Protection Rating	IP40	
LIFESPAN		
Average Life (Hours)	50,000	
Warranty (Years)	5	
COMPONENTS		
LED Light Source	Seoul 3528	
Driver	SIP50-11000	
Emergency Battery	55390	
CONSTRUCTION		
Housing	Aluminum	
Lens	Frosted	
Base / Power Supply	Hard Wired	
Finish	White	

QUALIFICATIONS



Visit www.designlights.org/search to confirm qualification. • Published lumens on LED products are approximate and may vary slightly. • Specifications are subject to change without notice.

Item#: **55611-8WEM** LED 4' SPEC-SELECT[™] DESIGNER STRIP




DIMENSIONS (Inches)

Length	47.3"
Width	3.4"
Height	3.6″
Net Weight (Lbs)	

SUPPORTING DOCUMENTS (Grey = not available at this time.)

Product Sheet	VIEW
Install Instructions	VIEW
Emergency Battery	VIEW
IES Download from Web Item	VIEW
LM79	VIEW
LM80	VIEW

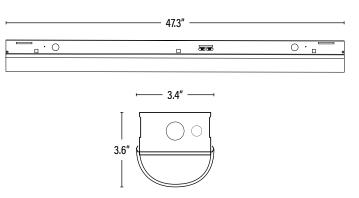

PACKAGING		UPC	DIMENSIONS (LxWxH)	GROSS WEIGHT (Lbs)
Master Carton	6	10811768021179		
Individual Box	1	811768021172		
Country of Origin	China			
HS Tariff	9405.10.6020			

ORDERING

ITEM#	DESCRIPTION	CASE
55611-8WEM	LED 4' SPEC-SELECT™ DESIGNER STRIP - 34/38/45W/35-50K/120-277V/DIMMABLE/8W EM BATTERY - SUPERIOR LIFE® DLC ®	6
ACCESSORIE	S	
54896	360° LOW/HIGH BAY FIXTURE OCCUPANCY PIR SENSOR 30' DIA, 8-40'HEIGHT 800W/1200W • 120/277V - SUPERIOR LIFE®	50
54897	360° LOW BAY BI-LEVEL AND DAYLIGHT HARVEST MICROWAVE SENSOR 48' DIA, 8-20' HEIGHT 800W/1200W • 120/277V - SL°	50
54898	360° HIGH BAY BI-LEVEL AND DAYLIGHT HARVEST MICROWAVE SENSOR 60' DIA, 8-50' HEIGHT 800W/1200W • 120/277V - SL®	50
54894	EXTENDER MOUNT FOR SENSOR 54896/54897/54898 - SUPERIOR LIFE®	100
55456	ROW ALIGNER FOR DESIGNER STRIP/V2 - SUPERIOR LIFE®	100
REPLACEMEN	IT PARTS	
55390	EMERGENCY PACK FOR LED FIXTURE 8W/90 MIN/SPLIT TYPE/L - SL® T20C	1
554658	REPLACEMENT LENS ONLY FOR V2 LED 4FT DESIGNER STRIP	1
SIP50-I1000	REPLACEMENT DIMMABLE LED DRIVER	1

ADDITIONAL INFORMATION:

- Default settings; 45W, 5000K.
- When the fixture is in emergency mode the color temperature will default to 5000K.
- The color temperature and wattage may be adjusted by two slide switches integrated into the driver. The color temperature and wattage should be selected prior to installation.

