

Item#: **84046**

LED STEALTH™ FIXTURE

OUTDOOR POLE/ARM-MOUNTED AREA AND ROADWAY LUMINAIRES - ARCHITECTURAL FLOOD AND SPOT LUMINAIRES

FEATURES

- Engineered for high lumen per watt light output.
- Slim and modern appearance.
- Integrated heat sink, provides excellent thermal dissipation.
- Surge protection device.
- Easy 1 person installation with our quick mount bracket and hinged door frame; installer can be hands free when establishing electrical connections.

APPLICATION

Parking lot, street and building perimeter lighting. Can be used as flood or area light.

ELECTRICAL

Wattage	300W
Voltage	120-277V
Current	--
Power Factor	0.9
Total Harmonic Distortion (THD)	--

LIGHTING PERFORMANCE

Lumens	45000
Lumens Per Watt (LPW)	150
Color Temperature (CCT)	5000K
Color Rendering (CRI)	80
R9 (Red Value)	--
Beam Angle	Type III
Light Distribution	--
BUG Rating (Backlight, Uplight, and Glare)	--
Dimmable Lighting Control	<i>Dimmable</i> 0-10V, Range 10% - 100%

ENVIRONMENT

Operating Temperature	-40° ~ 131°F
Suitable Location	WET
Ingress Protection Rating	IP66

LIFESPAN

Average Life (Hours)	50,000
Warranty (Years)	5

COMPONENTS

LED Light Source	--
Driver	EUM-150S420DG (2 ea.)

CONSTRUCTION

Housing	Aluminum
Lens	PC
Base / Power Supply	Hard Wire / Surge Protector
Finish	Bronze
Effective Projected Area (EPA)	0.42 ft ²
Wind Shear Rating	116.8 mph

QUALIFICATIONS

Model Number	STL3P-300W-5000K-C-MB-HC-P
--------------	----------------------------



Published lumens on LED products are approximate and may vary slightly. - Specifications are subject to change without notice.

PERFORMANCE DATA

Item#: **84046**
LED STEALTH™ FIXTURE




ITEM INFORMATION

DIMENSIONS (Inches)

Length	23.4"
Width	12"
Height	3.6"
Net Weight (Lbs)	--

SUPPORTING DOCUMENTS (Grey = not available at this time.)

Product Sheet	VIEW
Install Instructions	VIEW
IES Download from Web Item	VIEW
LM79	VIEW
LM80	VIEW

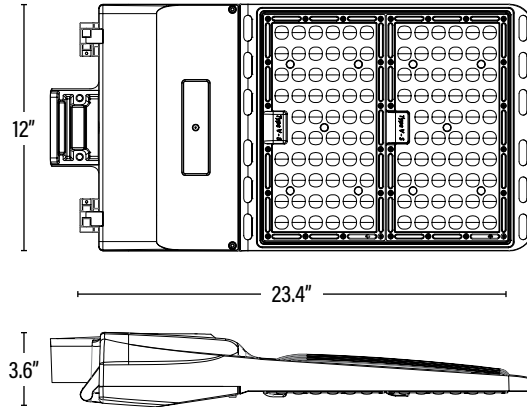

PACKAGING

		UPC	DIMENSIONS (LxWxH)	GROSS WEIGHT (Lbs)
Master Carton	1	811768028263	--	--
Country of Origin	China			
HS Tariff	9405.10.6020			

ORDERING* Qualification Model # *STL3P-300W-5000K-C-MB-HC-P*

ITEM#	DESCRIPTION	CASE
84046	LED STEALTH™ 300W/50K/DIMM/120-277V/BRZ	1

ACCESSORIES

83960	QUICK-MOUNT TRUNNION MOUNT BRACKET FOR STEALTH™/BRZ	10
83956	QUICK-MOUNT ADAPTER TO MOUNT ON ROUND OR FLAT POLE FOR STEALTH™/BRZ	10
83955	QUICK-MOUNT SLIP FITTER FOR STEALTH™/BRZ	10
83646	ADAPTER TO MOUNT A SLIP FITTER ON A FLAT POLE OR WALL/BRZ	1
84005	GLARE SHIELD FOR LED STEALTH™ 240W TO 300W	10
84016	DOOR FRAME ONLY FOR LED STEALTH™ WITH SENSOR CUT-OUT/240W-300W/BRZ	36
54892	360° OUTDOOR FIXTURE BI-LEVEL & DAYLIGHT HARVEST PIR SENSOR 30' DIA, UP TO 40' HEIGHT 800W/1200W • 120/277V	100
83963	PHOTO CONTROL FOR LED STEALTH™ FIXTURE/120-277V	50

REPLACEMENT PARTS

JL208	SHORTING CAP FOR LED STEALTH™ FIXTURE	1
EUM-150S420DG	LED REPLACEMENT DRIVER	1

ADDITIONAL INFORMATION:

- The mounting bracket is not included with the fixture, it is ordered as a separate item number. For DLC® qualification one of the Quick-Mount brackets must be purchased.
- Product requires top-mounted shorting cap or optional twist-lock photocell installed to operate.