



Item#: **84178**
LED SPEC-SELECT™ WALL PACK
 OUTDOOR NON-CUTOFF AND SEMI-CUTOFF
 WALL-MOUNTED AREA LUMINARIES

FEATURES

- Adjustable wattage and color temperature.
- Replaces traditional HID wall packs.
- Durable, die casting housing.
- Powder coat finish, corrosion and weather resistant.
- Sealed to keep out moisture and environmental contaminants.

APPLICATION

Ideal for security, walkways and perimeter lighting.

PERFORMANCE DATA

ELECTRICAL

Wattage	40W / 50W / 60W
Voltage	120-277V
Power Factor	0.9
Total Harmonic Distortion (THD)	--

LIGHTING PERFORMANCE

Lumens	5000-7500
Lumens Per Watt (Lm/W)	125
Color Temperature (CCT)	3000K / 4000K / 5000K
Color Rendering (CRI)	80
R9 (Red Value)	--
R13 (Skin Tones)	--
Beam Angle	110° x 105°
Light Distribution	--
BUG Rating (Backlight, Uplight, and Glare)	--
Dimmable Lighting Control	

ENVIRONMENT

Operating Temperature	-40° ~ 104°F
Suitable Location	WET
Ingress Protection Rating	IP65

LIFESPAN

Average Life (Hours)	50,000
Warranty (Years)	5

COMPONENTS

LED Light Source	--
Driver	ARC-DI-60I1450

CONSTRUCTION

Housing	Die Cast Aluminum
Lens	Tempered Glass
Base / Power Supply	Hard Wired
Finish	Bronze

QUALIFICATIONS

Model Number	SSWP-B-FSC1-1-MV-BRZ
--------------	----------------------



Published lumens on LED products are approximate and may vary slightly. • Specifications are subject to change without notice.


Item#: **84178**
LED SPEC-SELECT™ WALL PACK



ITEM INFORMATION

DIMENSIONS (Inches)

Length	14.2"
Width	7.7"
Height	9.1"
Net Weight (Lbs)	--

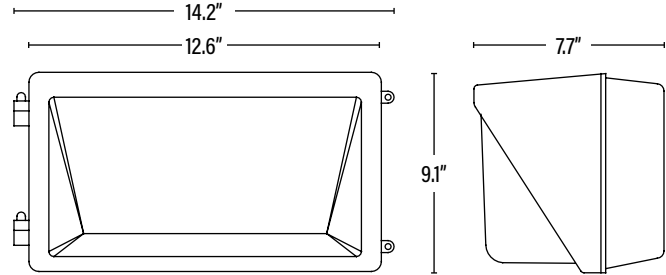

SUPPORTING DOCUMENTS (Grey = not available at this time.)

Product Sheet	VIEW
Install Instructions	VIEW
IES Download from Web Item	VIEW
LM79	VIEW
LM80	VIEW

PACKAGING

		UPC	DIMENSIONS (LxWxH)	GROSS WEIGHT (Lbs)
Master Carton	1	811768022834	15.4" x 10.6" x 9.4"	9.3
Country of Origin	China			
HS Tariff	9405.10.6020			

ORDERING Qualification Model # SSWP-B-FSC1-1-MV-BRZ

ITEM#	DESCRIPTION	CASE
84178	LED SPEC-SELECT™ WALL PACK 40W/50W/60W - 30K/40K/50K/120-277V/BRONZE - SUPERIOR LIFE®	1

ACCESSORIES

83335	SHIELD ONLY FOR LED WALL PACK - SUPERIOR LIFE®	15
83336*	BUTTON STYLE PHOTO CELL FOR LED WALL PACK/120-277V - SUPERIOR LIFE®	70

REPLACEMENT PARTS

841708	REPLACEMENT LENS FOR LED WALL PACK	1
ARC-DI-60I1450	60W REPLACEMENT DRIVER	1

ADDITIONAL INFORMATION:

*83336: Photo Cell is top mount only and requires driver removal to install.

Note: To prevent water damage which may shorten the life of an exterior mounted fixture; the fixture should be properly weather sealed according to the installation instructions or between the fixture base and mounting surface. Damage due to improper installation may void the warranty.