



Item#: **84530**

## LED BULLET FLOOD

ARCHITECTURAL FLOOD AND SPOT  
LUMINAIRES

### FEATURES

- Durable, die casting aluminum
- Excellent thermal management for a long life
- Bronze powder coat finish, corrosion and weather resistant.
- High-Temperature silicon gaskets to keep out moisture and environmental contaminants.


### APPLICATION

Landscape lighting and wall washing.

### ELECTRICAL

Wattage	11.8W
Voltage	100-277V
Current	0.12A
Power Factor	0.9
Total Harmonic Distortion (THD)	15

### LIGHTING PERFORMANCE

Lumens	1450
Lumens Per Watt (Lm/W)	123
Color Temperature (CCT)	3000K
Color Rendering (CRI)	70
R9 (Red Value)	--
R13 (Skin Tones)	--
Beam Angle	60°
Light Distribution	Very Short, Type I
BUG Rating (Backlight, Uplight, and Glare)	B1 - U1 - G0
Dimmable Lighting Control	

### ENVIRONMENT

Operating Temperature	-22° ~ 104°F
Suitable Location	<b>WET</b>
Ingress Protection Rating	IP65

### LIFESPAN

Average Life (Hours)	50,000
Warranty (Years)	<b>5</b>

### COMPONENTS

LED Light Source	Seoul 3030
Driver	--

### CONSTRUCTION

Housing	Aluminum
Base / Power Supply	Hard Wired
Finish	Bronze

### QUALIFICATIONS



Visit [www.designlights.org/search](http://www.designlights.org/search) to confirm qualification. • Published lumens on LED products are approximate and may vary slightly. • Specifications are subject to change without notice.

Item#: **84530**  
**LED BULLET FLOOD**




**DIMENSIONS** (Inches)

Length	5'
Width/Diameter	3.5"
Height	5.4"
Net Weight (Lbs)	1.2

**SUPPORTING DOCUMENTS** (Grey = not available at this time.)

Product Sheet	VIEW
Install Instructions	VIEW
IES Download from Web Item	VIEW
LM79	VIEW
LM80	VIEW

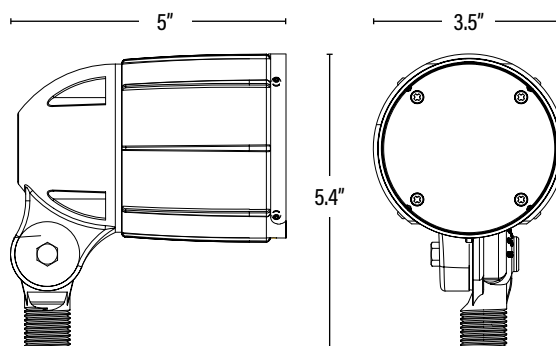

**PACKAGING**

		UPC	DIMENSIONS (LxWxH)	GROSS WEIGHT (Lbs)
Master Carton	8	10811768026440	13.8" x 11.4" x 13.4"	15
Individual Box	1	811768026443	--	1.9
Country of Origin	China			
HS Tariff	9405.10.6020			

**ORDERING**

ITEM#	DESCRIPTION	CASE
84530	LED 12W BULLET/FL/30K/100-277V/V2 - SUPERIOR LIFE® DLC®	8