





Item#: 92127 LED HIGH WATTAGE 180° LAMP

REPLACEMENT LAMPS FOR OUTDOOR POLE/ARM MOUNTED DECORATIVE LUMINAIRES (TYPE B)

FEATURES

- Environmentally friendly; uses less energy than a traditional lamp.
- 180° optical design that provides even light distribution.
- 350° rotating base for precise positioning
- · Excellent heat dissipation.
- · High lumen output.
- Only Dimmable on 120V.

APPLICATION

Replacement lamps for top post, high bays, parking lots and street lighting.

ELECTRICAL

Wattage	100W
Voltage	120-277V
Current	0.88A
Power Factor	0.9
Total Harmonic Distortion (THD)	20

LIGHTING PERFORMANCE

Lumens	15500
Lumens Per Watt (LPW)	155
Color Temperature (CCT)	5000K
Color Rendering (CRI)	80
R9 (Red Value)	
R13 (Skin Tones)	
Beam Angle	110°
Light Distribution	
BUG Rating (Backlight, Uplight, and Glare)	
Dimmable Lighting Control	Dimmable see compatibility report

ENVIRONMENT

Operating Temperature	-40° ~ 149°F
Suitable Location	DAMP
Ingress Protection Rating	IP40
Suitable Fixture Type	Enclosed
Suitable for Emergency Fixtures/Ballasts	No
-	

LIFESPAN

Average Life (Hours)	50,000
Warranty (Years)	5

COMPONENTS

LED Light Source	Bridgelux
LED LIGHT SOUTCE	Driugei

CONSTRUCTION

Housing	Aluminum / PC	
Lens	Clear	
Base / Power Supply	E39 - Mogul	

QUALIFICATIONS



Published lumens on LED products are approximate and may vary slightly. • Specifications are subject to change without notice.

Item#: **92127 LED HIGH WATTAGE 180° LAMP**





DIMENSIONS (Inches)

Length (MOL)	11"
Width	4.7"
Height	3.1"
Net Weight (Lbs)	


SUPPORTING DOCUMENTS (Grey = not available at this time.)

301 1 Off Title DOCOMENTS (Grey = not available at this time.)	
Product Sheet	VIEW
Install Instructions	VIEW
Dimmer Compatibility	VIEW
IES Download from Web Item	VIEW
LM79	VIEW
LM80	VIEW

4

1

China

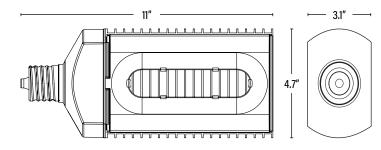

UPC	DIMENSIONS (LxWxH)	GROSS WEIGHT (Lbs)
10811768028901	25.4" x 12.4" x 4.9"	
811768028904	5.9" x 4.1" x 12.3"	

ORDERING

HS Tariff

PACKAGING

Master Carton

Individual Box

Country of Origin

ITEM#	DESCRIPTION	CASE
92127	LED 100W/180°/50K/M0G/120-277V/DIMMABLE - SUPERIOR LIFE®	4