


# CWH3000 SERIES

## COMMERCIAL FAN-FORCED WALL HEATER

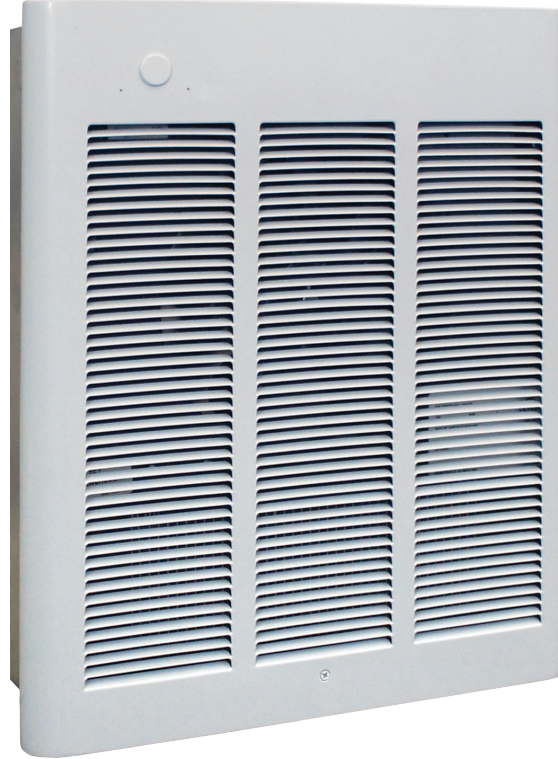

### IDEAL SPACES

- Mechanical Rooms
- Vestibules
- Entrance Ways
- Lobbies
- Hallways
- Stairwells
- Restaurants
- Conference Rooms
- Medical Offices
- Basements
- Family Rooms

### COLORS

- Northern White

### DIMENSIONS

- Grille: 19-5/16"H x 15-3/4"W x 7/8"D
- Back Box: 18-1/4"H x 14-5/16"W x 3-3/4"D

### TEMP RANGE

- 40°– 90°F

### CFM

- 100

- Contemporary design combined with commercial-grade steel grille to provide comfort through optimized airflow
- Fan-only operation for summer use
- Built-in power on/off switch for added safety during maintenance
- Manual reset thermal overload protector disconnects power in the event of accidental blockage
- Automatic fan delay eliminates cold drafts on start-up and discharges residual heat from the heater body during shut down
- Integral double-pole thermostat allows for easy adjustment to maintain desired temperature
- All units have a permanently lubricated enclosed fan motor, which creates long life, low maintenance, and gently distributes warmth throughout the area



[www.qmarkmep.com](http://www.qmarkmep.com)

For Technical Services, Call 800-642-4328

ITEM# QFLY\_CWH3000\_1217-1



## CWH3000 SERIES COMMERCIAL FAN-FORCED WALL HEATER

### MODELS & SPECIFICATIONS

CATALOG NO.	UPC	VOLTS	WATTS	AMPS	PHASE	BTU/HR.	SHIP WT. (LBS.)
CWH3150F	6 85360 16238 6	120	1500	12.5	1	5118	25
CWH3180F	6 85360 16240 9	120	1800	15	1	6142	25
CWH3404F*	6 85360 16246 1	240	4000/2000	16.7/8.3	1	13,649/6824	25
		208	3000/1500	14.5/7.2		10,236/5118	
CWH3407F*	6 85360 16248 5	277	4000/2000	14.5/7.2	1	13,649/6824	25
		240	3000/1500	12.5/6.3		10,236/5118	
CWH3307F*	6 85360 16242 3	277	3000/1500	10.8/5.4	1	10,236/5118	25
CWH3408F*	6 85360 16250 8	208	4000/2000	19.2/9.6	1	13,649/6824	25
CWH34083F	6 85360 16250 8	208	4000	11.1	3	13,649	25
CWH34043F	6 85360 16244 7	240	4000	9.7	3	13,649	25
CWH3504F	6 85360 16256 0	240	4800	20	1	16,378	25
		208	3600	17.3		12,284	
		277	4800	17.3		16,378	
CWH3507F	6 85360 16258 4	240	3600	15.0	1	12,284	25
		208	4800	23.1		16,378	
CWH35083F	6 85360 16260 7	208	4800	13.4	3	16,378	25
CWH35043F	6 85360 16254 6	240	4800	11.6	3	16,378	25
CWH3203F	6 85360 16418 2	347	2000	5.8	1	6824	25
CWH3206F	6 85360 01909 3	600	2000	3.3	1	6824	25
CWH3153F	6 85360 16422 9	347	1500	4.3	1	5118	25
CWH3156F	6 85360 16424 3	600	1500	2.5	1	5118	25
CWH3303F	6 85360 01921 5	347	3000	8.6	1	10,236	25
CWH3306F	6 85360 01924 6	600	3000	5	1	10,236	25
CWH3403F	6 85360 01932 1	347	4000	11.5	1	13,649	25
CWH3406F	6 85360 01943 7	600	4000	6.7	1	13,649	25
CWH3503F	6 85360 01959 8	347	4800	13.8	1	16,378	25
CWH3506F	6 85360 01970 3	600	4800	8	1	16,378	25

NOTE: \*Factory-wired for higher wattage, field-convertible to half wattage. For wall mounting – Do not install back box closer than 8 in. from floor or adjacent wall. Do not install heater behind towel rack, behind door, in floor, in closet, in ceiling or where air flow may be obstructed.

### ACCESSORIES

CATALOG NO.	UPC	DESCRIPTION	SHIP WT. (LBS)
FRAFCTPF	6 85360 02710 4	Tamper-Proof Front Cover, Northern White	2
CWH3SM	6 85360 02822 4	Surface Mounting Frame, Northern White	5
CWH3S1	6 85360 03036 4	1 in. Semi-Recessed Frame, Northern White	2
CWH3S2	6 85360 03035 7	2 in. Semi-Recessed Frame, Northern White	2
LFKSFNCW	6 85360 16079 5	14-gauge Security Front Cover, Northern White	6

