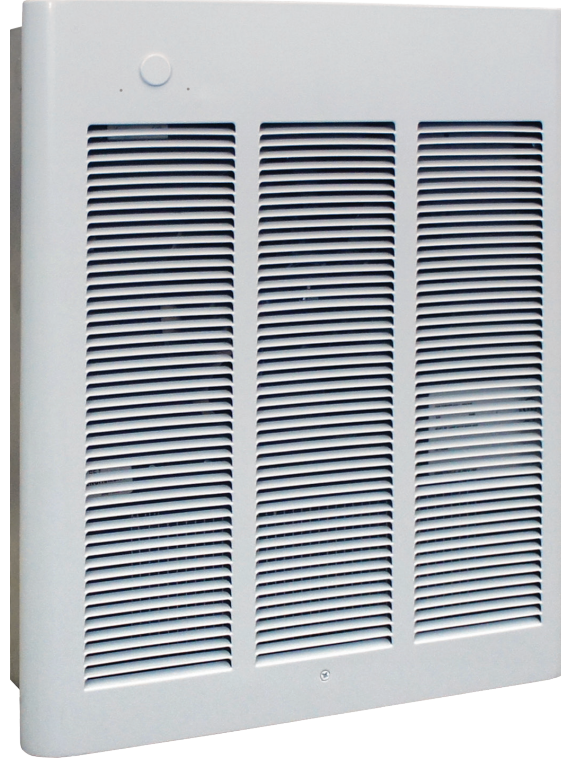


**FRA SERIES****COMMERCIAL FAN-FORCED WALL HEATER****IDEAL SPACES**

- Mechanical Rooms
- Vestibules
- Entrance Ways
- Lobbies
- Hallways
- Stairwells
- Restaurants
- Conference Rooms
- Medical Offices
- Basements
- Family Rooms

**COLORS**

- Northern White

**DIMENSIONS**

- Grille: 19-5/16"H x 15-3/4"W x 7/8"D
- Back Box: 18-1/4"H x 14-5/16"W x 3-3/4"D

**TEMP RANGE**

- 40°– 90°F

**CFM**

- 100

- Contemporary design combined with commercial-grade steel grille to provide comfort through optimized airflow
- Fan-only operation for summer use
- Built-in power on/off switch for added safety during maintenance
- Manual reset thermal overload protector disconnects power in the event of accidental blockage
- Automatic fan delay eliminates cold drafts on start-up and discharges residual heat from the heater body during shut down
- Integral double-pole thermostat allows for easy adjustment to maintain desired temperature
- All units have a permanently lubricated enclosed fan motor, which creates long life, low maintenance, and gently distributes warmth throughout the area



[www.berkomep.com](http://www.berkomep.com)

For Technical Services, Call 800-642-4328

ITEM# BFLY\_FRA\_1217-1

**BERKO**<sup>®</sup>  
A Marley Engineered Products Brand

## FRA SERIES COMMERCIAL FAN-FORCED WALL HEATER

### MODELS & SPECIFICATIONS

CATALOG NO.	UPC	VOLTS	WATTS	AMPS	PHASE	BTU/HR.	SHIP WT. (LBS.)
FRA1512F	6 85360 16239 3	120	1500	12.5	1	5118	25
FRA1812F	6 85360 16241 6	120	1800	15	1	6142	25
FRA4024F*	6 85360 16247 8	240	4000/2000	16.7/8.3	1	13,649/6824	25
		208	3000/1500	14.5/7.2		10,236/5118	
FRA4027F*	6 85360 16249 2	277	4000/2000	14.5/7.2	1	13,649/6824	25
		240	3000/1500	12.5/6.3		10,236/5118	
FRA3027F*	6 85360 16243 0	277	3000/1500	10.8/5.4	1	10,236/5118	25
FRA4020F*	6 85360 16253 9	208	4000/2000	19.2/9.6	1	13,649/6824	25
FRA40203F	6 85360 16251 5	208	4000	11.1	3	13,649	25
FRA40243F	6 85360 16245 4	240	4000	9.7	3	13,649	25
FRA4824F	6 85360 16257 7	240	4800	20	1	16,378	25
		208	3600	17.3		12,284	
FRA4827F	6 85360 16259 1	277	4800	17.3	1	16,378	25
		240	3600	15.0		12,284	
FRA4820F	6 85360 16263 8	208	4800	23.1	1	16,378	25
FRA48203F	6 85360 16261 4	208	4800	13.4	3	16,378	25
FRA48243F	6 85360 16255 3	240	4800	11.6	3	16,378	25
FRA3203F	6 85360 16419 9	347	2000	5.8	1	6824	25
FRA3206F	6 85360 16421 2	600	2000	3.3	1	6824	25
FRA3153F	6 85360 16423 6	347	1500	4.3	1	5118	25
FRA3156F	6 85360 16425 0	600	1500	2.5	1	5118	25
FRA3303F	6 85360 16427 4	347	3000	8.6	1	10,236	25
FRA3306F	6 85360 16429 8	600	3000	5	1	10,236	25
FRA3403F	6 85360 16431 1	347	4000	11.5	1	13,649	25
FRA3406F	6 85360 16433 5	600	4000	6.7	1	13,649	25
FRA3503F	6 85360 16435 9	347	4800	13.8	1	16,378	25
FRA3506F	6 85360 16437 3	600	4800	8	1	16,378	25

NOTE: \*Factory-wired for higher wattage, field-convertible to half wattage. For wall mounting – Do not install back box closer than 8 in. from floor or adjacent wall. Do not install heater behind towel rack, behind door, in floor, in closet, in ceiling or where air flow may be obstructed.

### ACCESSORIES

CATALOG NO.	UPC	DESCRIPTION	SHIP WT. (LBS)
FRAFCTPF	6 85360 02710 4	Tamper-Proof Front Cover, Northern White	2
FRASM	6 85360 02822 4	Surface Mounting Frame, Northern White	5
FRAS1	6 85360 03036 4	1 in. Semi-Recessed Frame, Northern White	2
FRAS2	6 85360 03035 7	2 in. Semi-Recessed Frame, Northern White	2
VFKFSCNW	6 85360 16080 1	14-gauge Security Front Cover, Northern White	6

