

## HBB SERIES

### ELECTRIC HYDRONIC BASEBOARD HEATER




#### IDEAL SPACES

- Bedrooms
- Living/Family Rooms
- Kitchens
- Bathrooms
- Basements
- Offices
- Conference Rooms
- Hallways
- Lobbies
- Waiting Rooms
- Day Cares
- Geriatric Facilities

#### COLORS

- Navajo White

#### DIMENSIONS

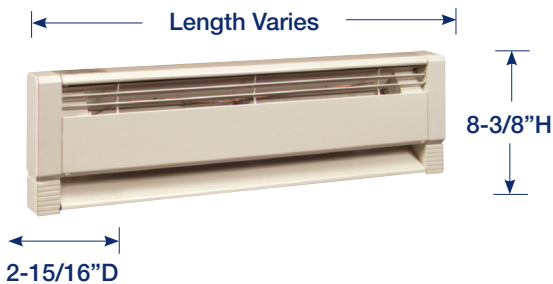

- Ideal for superior, efficient and zoned Primary/Secondary comfort
- Low profile ideal for limited wall space
- Storage fluid maximizes convection, minimizing air flow, reducing flow of bacteria and dust
- Large element reservoir maximizes the volume of heat storage fluid for prolonged comfort
- Gentle heat continues to radiate even after the thermostat turns off due to the hydronic element retention qualities
- Hydronic element reduces on/off cycling of thermostat maintaining even room comfort and reducing energy costs
- Low surface temperatures safe for installations with pets, children and carpet
- Heavy-duty welded steel louvered grilles discourage insertion of foreign objects
- Built-in wire way, lead wires, and knockouts allow quick field connection from either end
- UL-listed for installation flush to any wall and flat on any floor type; pre-notched marks for mounting guide
- High temperature safety limit
- Corrosion resistant aluminum fins are pressure-fitted to copper tubing to assure rapid heat transfer, air flow
- Air flow is directed away from walls and into the room to help prevent wall streaking & minimizes dry air

## HBB SERIES

### ELECTRIC HYDRONIC BASEBOARD HEATER

#### MODELS & SPECIFICATIONS

| CATALOG NO. | UPC             | VOLTS   | WATTS     | AMPS    | LENGTH (IN) | SHIP WT. (LBS) |
|-------------|-----------------|---------|-----------|---------|-------------|----------------|
| HBB500      | 6 85360 03577 2 | 120     | 500       | 4.2     | 28"         | 10             |
| HBB508      | 6 85360 03580 2 | 208     | 500       | 2.4     |             |                |
| HBB504      | 6 85360 03578 9 | 240/208 | 500/375   | 2.1/1.8 |             |                |
| HBB750      | 6 85360 03581 9 | 120     | 750       | 6.3     | 34"         | 12             |
| HBB758      | 6 85360 03584 0 | 208     | 750       | 3.6     |             |                |
| HBB754      | 6 85360 03582 6 | 240/208 | 750/563   | 3.1/2.7 |             |                |
| HBB1000     | 6 85360 03562 8 | 120     | 1000      | 8.3     | 46"         | 15             |
| HBB1008     | 6 85360 03565 9 | 208     | 1000      | 4.8     |             |                |
| HBB1004     | 6 85360 03563 5 | 240/208 | 1000/750  | 4.2/3.6 |             |                |
| HBB1250     | 6 85360 03566 6 | 120     | 1250      | 10.4    | 58"         | 19             |
| HBB1258     | 6 85360 03569 7 | 208     | 1250      | 6       |             |                |
| HBB1254     | 6 85360 03567 3 | 240/208 | 1250/938  | 5.2/4.5 |             |                |
| HBB1500     | 6 85360 03570 3 | 120     | 1500      | 12.5    | 70"         | 22             |
| HBB1508     | 6 85360 03573 4 | 208     | 1500      | 7.2     |             |                |
| HBB1504     | 6 85360 03571 0 | 240/208 | 1500/1125 | 6.3/5.8 |             |                |
| HBB2008     | 6 85360 03576 5 | 208     | 2000      | 9.6     | 94"         | 30             |
| HBB2004     | 6 85360 03574 1 | 240/208 | 2000/1500 | 8.3/7.2 |             |                |

#### CONTROLS & ACCESSORIES

| CATALOG NO. | UPC             | DESCRIPTION  | SHIP WT. (LBS) |
|-------------|-----------------|--|----------------|
| HBBT1       | 6 85360 03557 4 | 25 amp @ 120-277 VAC; Single-Pole Thermostat Snap-Action Type; Field-Installed in Junction Box | 1              |
| HBBT2       | 6 85360 03559 8 | 25 amp @ 120-277 VAC; Double-Pole Thermostat Snap-Action Type; Field-Installed in Junction Box | 1              |
| HBBT1TP     | 6 85360 03558 1 | Same as Model HBBT1 except Tamper-Resistant  | 1              |
| HBBT2TP     | 6 85360 03560 4 | Same as Model HBBT2 except Tamper-Resistant  | 1              |
| HBBAC*      | 6 85360 03538 3 | Air Conditioner Outlet Section, 20 amps @ 208/240 VAC  | 2              |
| HBBDR       | 6 85360 03542 0 | Duplex Receptacle Section, 15 amps @ 120 VAC   | 2              |
| HBBSDR120   | 6 85360 14797 0 | Double-Pole Disconnect Switch /120V Receptacle   | 3              |
| HBBWS       | 6 85360 03561 1 | 8 in. Blank Wiring Section   | 1              |
| HBBLVR0*    | 6 85360 03547 5 | Low Voltage Relay Control Section, 25 amps @ 120 VAC   | 3              |
| HBBLVR8*    | 6 85360 03550 5 | Low Voltage Relay Control Section, 25 amps @ 208 VAC   | 3              |
| HBBLVR4*    | 6 85360 03548 2 | Low Voltage Relay Control Section, 25 amps @ 240 VAC   | 3              |
| HBBDCS2     | 6 85360 03539 0 | Double-Pole Power On/Off Switch Section  | 2              |
| CBDBS2*     | 6 85360 01453 1 | 2 ft. Blank Section  | 6              |
| CBDBS3*     | 6 85360 01454 8 | 3 ft. Blank Section  | 8              |
| CBDBS4*     | 6 85360 01455 5 | 4 ft. Blank Section  | 11             |
| CBDBS5*     | 6 85360 01456 2 | 5 ft. Blank Section  | 14             |
| CBDBS6*     | 6 85360 01457 9 | 6 ft. Blank Section  | 16             |
| CBDBS8*     | 6 85360 01458 6 | 8 ft. Blank Section  | 22             |
| CBDCIC*     | 6 85360 01460 9 | Inside Corner  | 1              |
| CBDCOC*     | 6 85360 01461 6 | Outside Corner   | 1              |

NOTE: \*HBBAC - HBBDR - HBBLVR - HBBWS accessories add 8 in. to baseboard length.

