


KCJ SERIES INSTITUTIONAL ELECTRIC CONVECTOR

MADE TO ORDER

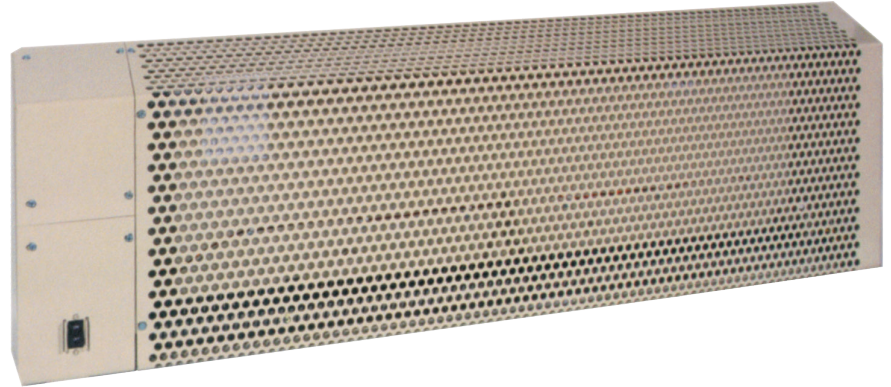

IDEAL SPACES

- Offices
- Conference Rooms
- Hallways
- Lobbies
- Waiting Rooms
- Other Common Areas

COLORS

- Neutral Gray

DIMENSIONS

- 16"H x 5"D (length varies)

- Durable, tamper-resistant convection heat
- Low operating temperatures of 140°F maximum surface temperature in a 70°F ambient
- Internal, secured thermostat with 55° to 100°F range
- 12-gauge perforated steel provides rugged resistance to vandalism
- Epoxy baked enamel finish insures resistance to chipping, cracking and rusting
- Sloped top cabinet prevents objects from being set on top, which could restrict airflow
- Internal DPST disconnect switch is accessible without removing cover



www.qmarkmep.com

For Technical Services, Call 800-642-4328

ITEM# QFLY_KCJ_1217-1

KCJ SERIES INSTITUTIONAL ELECTRIC CONVECTOR

MODELS & SPECIFICATIONS				
CATALOG NO.	VOLTS	WATTS (KW)	AMPS	SHIP WT. (LBS.)
KCJ400	120	400	3.3	40
KCJ408	208		1.9	
KCJ404	240		1.7	
KCJ407	277		1.4	
KCJ500	120		500	
KCJ508	208	2.4		
KCJ504	240	2.2		
KCJ507	277	1.8		
KCJ750	120	750	6.3	55
KCJ758	208		3.6	
KCJ754	240		3.3	
KCJ757	277		2.7	
KCJ753	347		2.2	
KCJ1000	120	1000	8.3	65
KCJ1008	208		4.8	
KCJ1004	240		4.4	
KCJ1007	277		3.6	
KCJ1003	347		2.9	
KCJ1006	600		1.7	
KCJ1250	120	1250	10.4	80
KCJ1258	208		6	
KCJ1254	240		5.4	
KCJ1257	277		4.5	
KCJ1253	347		3.6	
KCJ1256	600		2.1	
KCJ1500	120	1500	12.5	95
KCJ1508	208		7.2	
KCJ1504	240		6.5	
KCJ1507	277		5.4	
KCJ1503	347		4.3	
KCJ1506	600		2.5	
KCJ2008	208	2000	9.6	95
KCJ2004	240		8.8	
KCJ2007	277		7.2	
KCJ2003	347		5.8	
KCJ2006	600		3.3	

DIMENSIONS			
WATTS	LENGTH (IN) - A	HEIGHT (IN)	DEPTH (IN)
400	24	16	5
500	28		
750	36		
1000	48		
1250	60		
1500	72		
2000	96		

NOTE: Products are made-to-order and cannot be returned.

