


# 1079LED

120V

|              |  |      |
|--------------|--|------|
| Catalog #:   |  | Type |
| Project:     |  | Date |
| Prepared by: |  |      |

## Contempo - 3-Blade, 50" Sweep, Integrated LED Light Kit Included

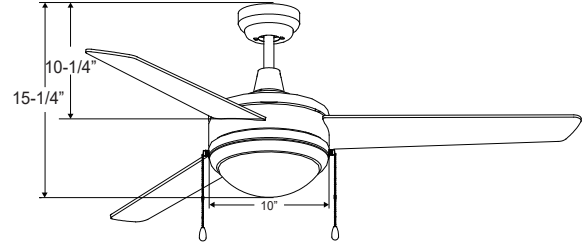

1079LED Contempo

### DESCRIPTION

The clean lines and modern design of the Contempo Series add style to any contemporary space. The integrated LED light kit provides ample illumination and energy saving over traditional sources.

### DESIGN FEATURES

#### Motor

- 3 speed | Reversible
- AC Motor | 153 x 15 mm motor | 3 capacitors
- RPM: High: 229 Low: 100
- 5204 CFM | 57.74 W | Efficiency = 90
- 76" Lead wire | 4" down rod included

#### Blades

- 3-Blade, 50" sweep
- Blade Construction: Plywood<sup>1</sup>
- 12° blade pitch

#### Light Kit

- Integrated LED light kit included
- 16W | 1302 lms (source) | 822 lms (delivered) | 3000K | 90 CRI | Dimmable
- Shade: Satin white glass
- Replacement glass: 1079-G-LED

#### Dimensions

|                          |                    |                          |
|--------------------------|--------------------|--------------------------|
| 15-1/4"                  | 10"                | 10-1/4"                  |
| Height<br>(lowest point) | Width<br>(housing) | Height<br>(top of blade) |

#### Controls:

- Pull Chain Standard
- Optional Remote Control (sold separately) RC-10
- Optional Wall Control (sold separately) WC-4 | WC-8 | WC-13 | WC-16

#### Certifications

- cETLus listed for damp location
- Fan Motor: Limited Lifetime Warranty
- LED Light Kit: 5 Year Limited Warranty
- Non-Electrical: 1 Year Limited Warranty

### ORDERING GUIDE

Example: 1079LED-BN-BN

| Model #  | Motor / Blade Finish   |
|----------|--|
| 1079LED- |  |
| 1079LED- | <b>BN-BN</b> : Brushed Nickel / Brushed Nickel<br><b>BN-WT</b> : Brushed Nickel / Walnut<br><b>OB-OB</b> : Oil Rubbed Bronze / Oil Rubbed Bronze<br><b>BK-BK</b> : Black/Black<br><b>MBK-MBK</b> : Matte Black / Matte Black<br><b>WW-WW</b> : White / White |

<sup>1</sup>To avoid fan blade warping, fan must be installed in climate controlled environment

TEL: 800.937.6925 | Fax: 800.207.9509 | [www.rplighting.com](http://www.rplighting.com)

Specifications and dimensions subject to change without notice.

