


4325D-1, 4326D-1, 4327D-1

120V

| | | |
|--------------|--|------|
| Catalog #: | | Type |
| Project: | | Date |
| Prepared by: | | |

LED Flush Ceiling Mount or Wall Mount

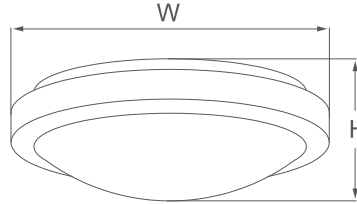

DESCRIPTION

This sleek low profile LED Flush Ceiling Mount or Wall Mount fixture is an energy efficient LED light that comes complete with an integrated LED light engine. This fixture can be mounted on either a ceiling or wall to provide light anywhere you need it.

DESIGN FEATURES

Construction

- Hard gauge metal back plate and heat sink to facilitate heat dissipation
- Durable steel construction

Electrical

- 120V-60Hz
- Dimmable TRIAC, 10-100%
- 50,000 hour projected life
- 4325D-1-30: 16W, 1394 lms (source), 1049 lms (delivered)
- 4326D-1-30: 24W, 2095 lms (source), 1512 lms (delivered)
- 4327D-1-30: 34W, 2771 lms (source), 1908 lms (delivered)
- 3000K | 80 CRI

Lens

- Polycarbonate diffused lens delivers even light distribution
- Lens replacement: 4325-L, 4326-L, or 4327-L

Dimensions

- 4325D-1-30: 12" W x 3-1/2" H
- 4326D-1-30: 14" W x 4" H
- 4327D-1-30: 16" W x 4-7/16" H

Certifications

- Energy Star Listed
- cCSAus listed for damp location
- 5 year limited warranty

ORDERING GUIDE

Example: 4325D-1-30OB-EM

| Model # | Finish | EM Option |
|------------|------------------------|-------------------------|
| 4325D-1-30 | BN : Brushed Nickel | blank : no EM option |
| 4326D-1-30 | OB : Oil-Rubbed Bronze | -EM : Adds battery pack |
| 4327D-1-30 | WH : White | |