

# 4350-1

120V 60Hz

Catalog #:		Type
Project:		Date
Prepared by:		

## 11" / 13" / 15" Flat Lens Thin Profile




Brushed Nickel (BN)



Oil Rubbed Bronze (OB)



White (WH)

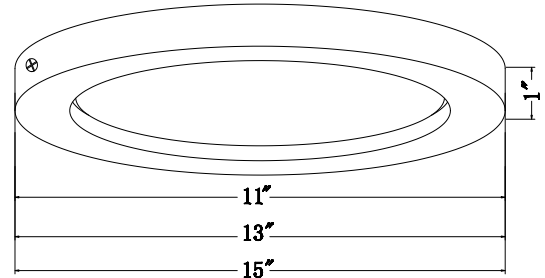

### DESCRIPTION

This versatile flat lens LED ceiling or wall mount fixture is great for hallways, larger rooms, and areas where a modern design with a thin profile would enhance the space.

### DESIGN FEATURES

#### Construction

- Steel frame construction
- Frosted acrylic lens

#### Electrical

- 120V-60Hz AC
- Dimmable TRIAC and ELV, 10-100%
- 50,000 hour projected life
- 3000K or 4000K | 90 CRI
- Beam Angle: 120°
- 11" | 15W | 1000 lms (delivered)
- 13" | 20W | 1450 lms (delivered)
- 15" | 30W | 1900 lms (delivered)

#### Dimensions

- 11": 11" W x 1" H
- 13": 13" W x 1" H
- 15": 15" W x 1" H

### Certifications

- ETL listed for damp location
- Energy Star listed
- CEC JA8 Compliant
- LED Light Source: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty

### ORDERING GUIDE

Example: 4350-1WH-3K-13

Model #	Finish	CCT	Dimension
4350-1			
4350-1	BN : Brushed Nickel * WH : White	-3K : 3000K -4K : 4000K	-11 : 11" diameter -13 : 13" diameter -15 : 15" diameter

\* 4350-1BN only available in -3K

Oil Rubbed Bronze (OB) available via Special Order; contact factory  
Brushed Nickel (BN) in -4K available via Special Order; contact factory

TEL: 800.937.6925 | Fax: 800.207.9509 | [www.rplighting.com](http://www.rplighting.com)

Specifications and dimensions subject to change without notice.



Intertek

LED Light Source

Other Components

11/17/22 R3



RP | LIGHTING • FANS