


4426

120V

| | | |
|--------------|--|------|
| Catalog #: | | Type |
| Project: | | Date |
| Prepared by: | | |

4" LED Architectural Cylinder Up & Downlight

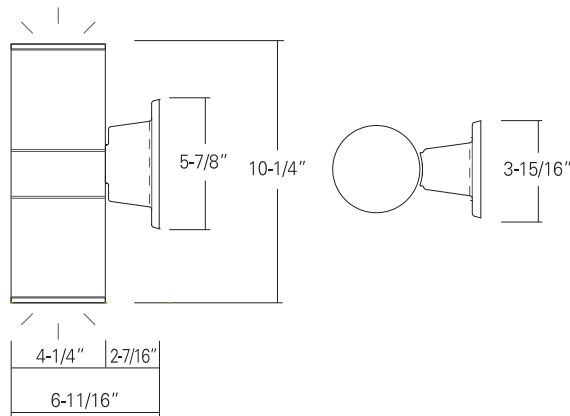

DESCRIPTION

The Outdoor LED Cylinder Family features wet location rated wall mount style cylinders with down light and up & down light options. Choose from energy efficient 13W, 17W, or 27W AC modules, with finishes available in black, brushed nickel, or oil-rubbed bronze. Features Triac dimming down to 5%, using most standard dimmers. Utilizes AC circuit on board technology for cooler operating temperature and extended lifetime.

DESIGN FEATURES

Construction

- Aluminum die-cast with powder coat finish

Electrical

- 120V Direct AC operation with DOB
- Triac dimming down to 5%
- Various wattages of modules available
- Cooler operating temperature without driver
- Operating temperature: -31°F (-35°C) to 122°F (50°C)
- Stable driving current prevents inrush damage to circuit switches and modules
- Available in 80CRI, 3000K & 4000K
- Power factor 0.90

Installation

- Easy surface mounting for simple installation using anchors and screws
- J-box mountable

Lens

- Clear acrylic lens protects LEDs while allowing for optimum lumen output
- 37° beam angle

Finish

- Black, brushed aluminum, or oil-rubbed bronze

Certifications

- cCSAus for wet location
- 5 year limited warranty
- Wet location rated



TEL: 800.937.6925 | Fax: 800.207.9509 | www.rplighting.com

Specifications and dimensions subject to change without notice.



4" LED Cylinder Up & Downlight

4426

120V

Specification & Ordering

| Model # | Dimensions (H x W x D) | Watt | Lumens (delivered) | Lumens (source) | Color Temp |
|---------|-----------------------------|------|--------------------|-----------------|------------|
| 4426 | 10-1/4" x 4-1/4" x 6-11/16" | 13W | 845lm | 1280lm | 3K 3000K |
| | | 17W | 1105lm | 1710lm | 4K 4000K |
| | | 27W | 1755lm | 2570lm | |

ORDERING

Example: 4426BK-30-3K

| Model # | Finish | Watts | CCT |
|---------|--|--|--|
| 4426 | | | |
| 4426 | BK : Black BA : Brushed Aluminum OB : Oil-rubbed Bronze | -13 : 13W -17 : 17W -27 : 27W | -3K : 3000 K -4K : 4000 K |

4" LED Cylinder Up & Downlight