


FF109X

Catalog #:		Type
Project:		Date
Prepared by:		

2-Hour Rated Fire Box

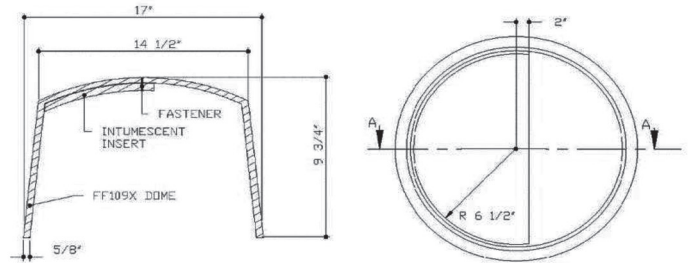

DESCRIPTION

The FF109X Fire Rated Cover is designed to reduce the ability of the insulation catching fire. Makes your recessed lights fire rated and gives you piece of mind that you are protected against accidental insulation fires. The FF109X is easy to install and fits most IC Rated fixtures. In a fire, the intumescent material expands 5 times of its original thickness, closing the vent holes and preventing flames to spread.

DESIGN FEATURES

Features

- 120 minute protection
- Fits most popular IC rated fixtures
- For Joist Spacing up to 24" on center
- Suitable for 2" x 10", 2" x 12", 2" x 14", and 2" x 16" joist
- Can be used in floor/ceiling, as well as roof/ceiling assemblies (attic)
- Lightweight (approx. 2.5 lbs)
- Easy Installation - can be fitted in seconds - no screws, drilling or additional sealant required
- Enhances the acoustic protection of the ceiling
- Reduces heat loss through the fixture
- Maintenance free
- Inside Height: 8" | Outside Diameter: 17"

Certifications

- UL Classified to maintain fire ratings of up to two hours for the following fire-rated floor/ceiling assemblies: L500, D500, G500, D200, G200, J200 and L200 Series
- UL Classified to maintain fire ratings of up to one hour for the following roof/ceiling assemblies (attics): P200 and P500 Series

ORDERING

Example: FF109X

Model #	
FF109X	FF109X

