



A CSW Industrials Company


PRODUCT DATA SHEET

K-FLEX® FOAM TAPE

Thermal performance for HVAC/R Applications

Description

K-FLEX® Foam Tape is an NBR/PVC-based closed cell, flexible elastomeric foam insulation tape with a factory-applied pressure sensitive adhesive that adheres firmly and forms a long-lasting bond. It is environmentally-friendly as it is free of CFCs, HFCs, HCFCs, PBDEs, formaldehyde and fibers. An EPA-registered antimicrobial agent is incorporated into the product providing additional protection against mold, fungal and bacterial growth. The product is made in K-FLEX USA's ISO 9001:2008-certified manufacturing facility in North Carolina.

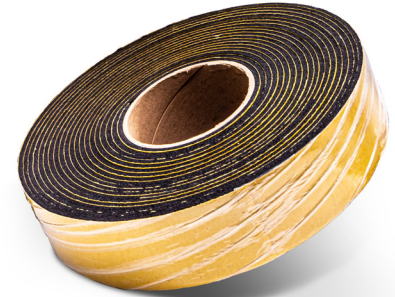

Applications

K-FLEX® Foam Tape is recommended for applications with service temperatures ranging from -40°F (-40°C) to +200°F (+93°C). The product is used to retard heat gain/loss on below-ambient to medium hot applications. It is ideal for insulating short runs of pipes or valves and fittings where it is impractical to install tubing insulation. The tape can be applied in multiple layers to meet various service conditions. It is not recommended for use with heat trace tapes for freeze protection applications.

Characteristics | Features

- Flexible
- Long-lasting bond
- Environmentally friendly
- Protects against mold, fungal and bacterial growth

Installation

K-FLEX® Foam Tape is flexible (even at low temperatures), durable (non-fracturing and resistant to tearing from handling and environment), safe to handle (non-dusting and non-abrasive), and lightweight for an efficient installation. K-FLEX recommends that insulation is installed on non-operational systems with clean, dry surfaces in ambient conditions between 40°F and 100°F. K-FLEX® Foam Tape can be applied to any diameter pipe by spiral winding with 50% overlap per layer until the desired thickness is obtained (removing the release paper as the tape is wrapped). Stretching should be avoided, edges may be butted or overlapped, and seams should be sealed with proper pressure, which is critical as the PSA backing is application temperature sensitive. Recommended for indoor use only.

Packaging

Code	Size	Qty. per Case	Lbs. per Case	Cubic Ft per Case
83041	2" x 1/8" x 30'	12	3	.11

Resistance to Moisture Vapor Flow

The expanded closed cell structure and unique formulation inherently resists moisture vapor intrusion and is considered a Class 1 vapor retarder per ASHRAE. For most indoor applications, K-FLEX® Foam Tape needs no additional protection. Additional vapor barrier protection may be necessary when installed on cold surfaces that are exposed to continuous high humidity.

Flame and Smoke Rating

K-FLEX® Foam Tape has a flame spread rating of 25 or less and a smoke development rating of 50 or less as tested to ASTM E84, "Surface Burning Characteristics of Building Materials". It is acceptable for duct/plenum applications, meeting the requirements of NFPA 90A/B.

Numerical flammability ratings alone may not define the performance of products under actual fire conditions. They are provided only for use in the selection of products to meet limits specified when compared to a known standard.

Technical Data

Physical Properties	K-Flex Foam Tape	Test Methods
Main Composition	Flame-retarded NBR/PVC-based elastomeric foam with a solvent-free, acrylic dispersion high tack adhesive with good resistance to moisture and aging	
Thermal Conductivity (Btu-in/hr-Ft ² -°F) 75°F (24°C) Mean Temp	0.245	ASTM C177
Density	3-6 lb/ft ³	ASTM D1667
Operating Temperature Range	-40°F (-40°C) to +200°F (+93°C)	ASTM C534
Water Vapor Permeability (Dry Cup)	<0.01 perm-in	ASTM E96
Water Absorption (Volume Change)	0%	ASTM C209
Flame Spread / Smoke Development (up to 2")	<25/50	ASTM E84
Flexibility	Pass: Cold Crack Test at -40°F (-40°C)	ASTM D1056
Freight Classification	Tape, insulation, NOIBN. No label required.	
Adhesive Thickness	0.07 mm	
Adhesive Peel Resistance	≥20 N / 25 mm	DIN EN 1939
Adhesive Shear Adhesion	500 g/625 mm ²	DIN EN 1943

Thickness Recommendations (Layers of 1/8" Tape)

Ambient Conditions	50°F (10°C) Process Temperature	32°F (0°C) Process Temperature
77°F (25°C) / 50% RH 1 Layer 2 Layers	1"	1/2"
85°F (29°C) / 70% RH 3 Layers 4 Layers	1"	1/2"

Limited Warranty

RectorSeal, LLC makes the Limited Express Warranty that when the instructions for storage and handling of our products are followed we warrant our products to be free from defects. THIS LIMITED EXPRESS WARRANTY IS EXPRESSLY IN LIEU OF ANY OTHER EXPRESS OR IMPLIED WARRANTIES, INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, AND OF ANY OTHER OBLIGATION ON THE PART OF RectorSeal, LLC. The sole remedy for breach of the Limited Express Warranty shall be the refund of the purchase price. All other liability is negated and disclaimed, and RectorSeal, LLC shall not be liable for incidental or consequential damages.

Manufactured by

K-Flex USA LLC 100 K-Flex Way Youngsville, NC 27596

Distributed by **RectorSeal, LLC**

2601 Spenwick Drive • Houston, TX 77055, USA • 800-231-3345 • Fax 800-441-0051 • rectorseal.com

A CSW Industrials Company. RectorSeal, the logos and other trademarks are property of RectorSeal, LLC, its affiliates or its licensor's and are protected by copyright, trademark and other intellectual property laws, and may not be used without permission. RectorSeal reserves the right to change specifications without prior notice. ©2020 RectorSeal. All rights reserved. R50599-0520