


## ASPEN® PUMPS M4R Condensate Removal Tank Pumps

### Description

A premium condensate solution, the versatile M4R Tank Pump embodies the Aspen Pumps tradition of build quality, high performance and reliability. Suitable for both furnace & A/C condensate removal, the M4R can be both wall & floor mounted, and features 4 tapered inlets giving the contractor complete installation flexibility.

### Packaging

Code	Description	Qty per Case	Lbs per Case	Cubic Feet
83943	M4R Tank Pump 115 V (15 ft)	6	21.83	1.53
83945	M4R Tank Pump 115 V (20 ft)	6	21.83	1.53
83946	M4R Tank Pump 230 V (17 ft)	6	21.83	1.53

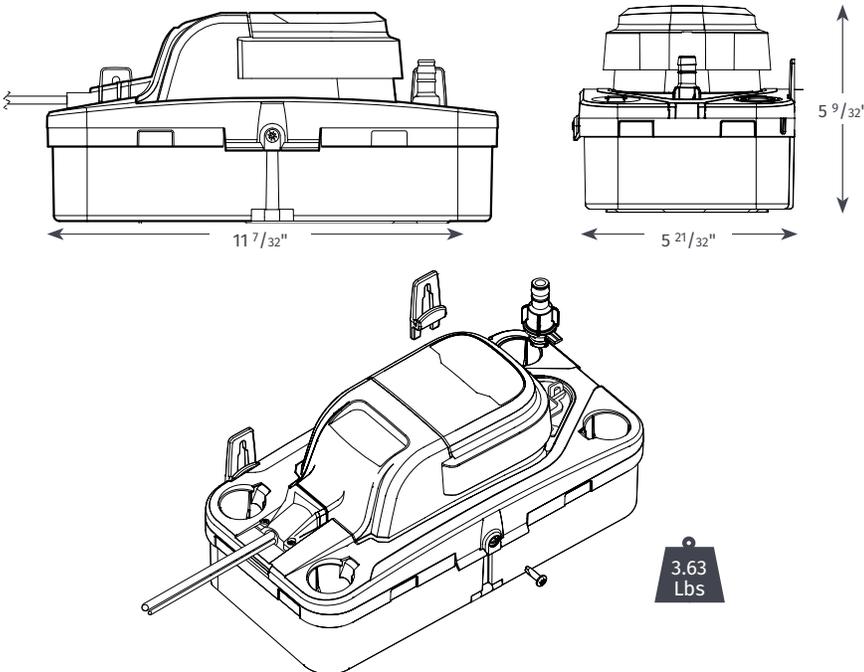

### Applications

Air conditioners, furnaces and dehumidifiers, residential or commercial

### Characteristics | Features

- Quiet – one of the quietest tank pumps on the market
- Low profile design – allows installation in variety of environments
- Neutral design – complements leading manufacturer's furnace & A/C units
- Easy installation & maintenance
- Wall or floor mounted with 4 inlets provide complete versatility.
- The quick-release tank allows removal and cleaning of the tank while the pump is still attached to the wall.
- Twist & click adaptor
- Adaptor retaining clip secures the adaptor
- Debris filters are located either side of the 4 inlets
- Built-in bubble level
- Fixing kit with wall mount clips included



### Specifications

Product code	Model Name	Volts	Max. rec. head	Max. flow	Hertz	Running		Max. unit output
						Amps	Watts	
83943	M4R 115 V (15 ft)	115	15 ft	65 US gph @ 0 head	60	1.6	85	94 ton / 1.1 m Btu/h
83945	M4R 115 V (20 ft)	115	20 ft	135 US gph @ 0 head	60	1.6	85	192 ton / 2.3 m Btu/h
83946	M4R 230 V (17 ft)	230	17 ft	100 US gph @ 0 head	60	.8	75	142 ton / 1.7m Btu/h

## LIMITED WARRANTY

RectorSeal, LLC (“RectorSeal”) warrants the following:

### 1. LIMITED WARRANTY

The Product subject to this sale will be of good quality and workmanship and conform to the Product’s performance specifications. If during the Warranty Period, the purchaser believes that a Product covered under this Limited Warranty fails to conform to specifications or is defective by reason of faulty design, workmanship or materials, then the purchaser must promptly notify RectorSeal within 15 days of such determination (a “Defect Notice”). RectorSeal will then inspect the Product and determine, in its reasonable judgment, whether an adjustment, repair, or replacement of the Product is warranted, and if so, promptly make the adjustment, repair, or replacement at no additional charge to the purchaser.

RectorSeal may elect to repair the Product on site or have the Product returned to RectorSeal’s premises. If the Product is returned to RectorSeal, risk of loss to the Product will at all times remain with the purchaser, and shipping costs will be borne by RectorSeal where the Product defect is covered by this Limited Warranty.

The foregoing Limited Warranty will be voided in the following conditions:

- I. The Product has not been used or stored (with proper documentation) in a manner consisted with the operating and maintenance instructions of RectorSeal or in compliance with the use or proper purpose intended by RectorSeal (i.e the Product was connected to voltage other than indicated on the nameplate, the Product was allowed to operate dry (fluid supply cut off), the Product was used to circulate anything other than water, etc.);
- II. The installation or application of the Product has not been performed in accordance with RectorSeal’s instructions (i.e. the Product cord was cut off to a length less than 3 feet);
- III. The Product defect has been caused by fire, accident, abuse, misuse (i.e. the Product’s sealed motor housing has been opened), unauthorized alteration, repair, reconstruction or maintenance (including modification of labels or packaging) or the use of sub-standard consumables (ordinary wear and tear excepted);
- IV. The Product defect has arisen from a design, specification, component or material supplied by or on behalf of the purchaser or a third party; or
- V. The Product or any part of the Product has been used or combined with goods, products, hardware or other materials, or has been replaced with a part not supplied or approved by RectorSeal.

### 2. LIMITED WARRANTY TERM

The duration of this Limited Warranty is 24 months from the Product’s date of sale (the “Warranty Period”).

### 3. LIMITATION OF LIABILITY AND DISCLAIMER

Before using the Product, the purchaser is solely responsible for determining the suitability of the Product for the intended use, and the purchaser assumes all risk and liability whatsoever in connection therewith. The terms set forth herein are the purchaser’s exclusive remedy for breach of this Limited Warranty. RectorSeal does not warrant any products or services not provided by RectorSeal, or any third-party products or services that incorporate the Products. **RectorSeal will not under any circumstances be liable for any consequential, incidental, special or punitive damages or losses, whether direct or indirect.**

**EXCEPT FOR THE LIMITED WARRANTY SET FORTH HEREIN, RECTORSEAL MAKES NO WARRANTY WHATSOEVER WITH RESPECT TO THE PRODUCT, INCLUDING (A) WARRANTY OF MERCHANTABILITY; OR (B) WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE, WHETHER EXPRESS OR IMPLIED, BY LAW, COURSE OF DEALING, COURSE OF PERFORMANCE, USAGE OF TRADE OR OTHERWISE.**

Manufactured for

**RectorSeal, LLC**

**2601 Spenwick Drive • Houston, TX 77055, USA • 800-231-3345 • Fax 800-441-0051 • [rectorseal.com](http://rectorseal.com)**  
3255 Wyandotte St. East, Windsor, ON N8Y 1E9, 519-966-4901

A CSW Industrials Company. RectorSeal, the logos and other trademarks are property of RectorSeal, LLC, its affiliates or its licensor’s and are protected by copyright, trademark and other intellectual property laws, and may not be used without permission. RectorSeal reserves the right to change specifications without prior notice. ©2021 RectorSeal. All rights reserved. R50697-0221