

B – BRAVA®

ELECTRIC BASEBOARD

BRAVA®



THE REFERENCE ON THE MARKET

The B baseboard's reputation is well established. It's simply the most recognized and sought-after baseboard on the market. Now known as the Brava, this strong and durable baseboard stands out thanks to its rounded corners and unique, no-end-cap, one-piece design.

- **ROUNDED CORNERS**
- **QUICK AND EASY INSTALLATION**
- **STRONG CABINET**
ONE-PIECE CONSTRUCTION
- **MAY BE CONTROLLED BY A BUILT-IN OR WALL THERMOSTAT**

COLOURS

- **standard:** white
- **Orora (optional):** refer to stelpro.com/orora/

FINISH

- epoxy-polyester powdercoat

MANUFACTURING

- 22-gauge steel casing able to support 75 kg (165 lb) at its centre
- full-length thermal protection with automatic reset
- cabinet designed to ensure optimal hot air distribution
- full-length wireway

ELEMENT

- single tubular, stainless steel sheathed element with boxed aluminum fins for improved heat dissipation; the element is securely fastened at its centre, floating in nylon sleeves at each end, eliminating expansion and contraction noises

CONTROL

- built-in thermostat installed in the left or right junction box (optional)
- single pole electronic thermostat installed in the left or right junction box (optional)
- wall thermostat (not included) – the use of an electronic thermostat is strongly recommended
- low voltage relay kit installed in the left junction box only (optional)

INSTALLATION

- surface mounted
- knockouts for the BX and clamps for the NMD cables located at each end
- mounting holes spaced at 1-inch intervals along the top and the bottom of the unit

WARRANTY

- five years, *three years on electronic components and lifetime warranty on heating element (for original owner)

IDEAL FOR:

kitchen, living room, bedroom, office, basement, commercial space

°STELPRO

Stelpro reserves the right to modify at any time the description, manufacturing, or price of its products. Additionally, Stelpro may apply restocking fees or refuse a refund based on one or more of the following criteria: optional color, custom product, assembly with low-demand options. For the latest product information and prices regarding the products, please visit the website www.stelpro.com.

TECHNICAL SPECIFICATIONS

DENSITY OF 250 W PER LINEAR FOOT	POWER	VOLTAGE	LENGTH		WEIGHT		PRICE
			MM	IN.	KG	LB	
CODE	WATTS	VOLTS					
B03019W	300	120	559	22	2.0	4.3	80.00
B03089W	300	208	559	22	2.0	4.3	63.00
B03029W	300/225	240/208	559	22	2.0	4.3	63.00
---	300	347	559	22	2.0	4.3	---
---	300	600	559	22	2.0	4.3	---
B0501W	500	120	708	27 7/8	3.0	7	86.00
B0508W	500	208	708	27 7/8	3.0	7	66.00
B0502W	500/375	240/208	708	27 7/8	3.0	7	66.00
B0503W	500	347	708	27 7/8	3.0	7	86.00
---	500	600	708	27 7/8	3.0	7	---
B0751W	750	120	956	37 5/8	4.1	9	92.00
B0758W	750	208	956	37 5/8	4.1	9	76.00
B0752W	750/560	240/208	956	37 5/8	4.1	9	76.00
B0753W	750	347	956	37 5/8	4.1	9	92.00
B0756W	750	600	956	37 5/8	4.1	9	92.00
B1001W	1000	120	1207	47 1/2	5.1	11	107.00
B1008W	1000	208	1207	47 1/2	5.1	11	88.00
B1002W	1000/750	240/208	1207	47 1/2	5.1	11	88.00
B1003W	1000	347	1207	47 1/2	5.1	11	107.00
B1006W	1000	600	1207	47 1/2	5.1	11	107.00
B1251W	1250	120	1454	57 1/4	6.2	14	128.00
B1258W	1250	208	1454	57 1/4	6.2	14	103.00
B1252W	1250/940	240/208	1454	57 1/4	6.2	14	103.00
B1253W	1250	347	1454	57 1/4	6.2	14	128.00
B1256W	1250	600	1454	57 1/4	6.2	14	128.00
B1501W	1500	120	1683	66 1/4	7.2	16	141.00
B1508W	1500	208	1683	66 1/4	7.2	16	112.00
B1502W	1500/1125	240/208	1683	66 1/4	7.2	16	112.00
B1503W	1500	347	1683	66 1/4	7.2	16	141.00
B1506W	1500	600	1683	66 1/4	7.2	16	141.00
---	1750	120	1930	76	8.2	18	---
B1758W	1750	208	1930	76	8.2	18	132.00
B1752W	1750/1315	240/208	1930	76	8.2	18	132.00
B1753W	1750	347	1930	76	8.2	18	167.00
B1756W	1750	600	1930	76	8.2	18	167.00
---	2000	120	2130	83 7/8	9.1	20	---
B2008W	2000	208	2130	83 7/8	9.1	20	146.00
B2002W	2000/1500	240/208	2130	83 7/8	9.1	20	146.00
B2003W	2000	347	2130	83 7/8	9.1	20	188.00
B2006W	2000	600	2130	83 7/8	9.1	20	188.00
---	2250	120	2381	93 3/4	10.2	22	---
B2258W	2250	208	2381	93 3/4	10.2	22	159.00
B2252W	2250/1690	240/208	2381	93 3/4	10.2	22	159.00
B2253W	2250	347	2381	93 3/4	10.2	22	203.00
B2256W	2250	600	2381	93 3/4	10.2	22	203.00
---	2500	120	2607	102 5/8	11.1	24	---
B2508W	2500	208	2607	102 5/8	11.1	24	174.00
B2502W	2500/1875	240/208	2607	102 5/8	11.1	24	174.00
B2503W	2500	347	2607	102 5/8	11.1	24	222.00
B2506W	2500	600	2607	102 5/8	11.1	24	222.00

Consult the optional colours chart or contact your Stelpro representative for all other colours.

Models also available in 277 V and 480 V.


--- not available

Please note that the width of the units may vary by more or less 1/16 in. (0.15 cm).

BUILT-IN THERMOSTATS



SIBTE - ELECTRONIC

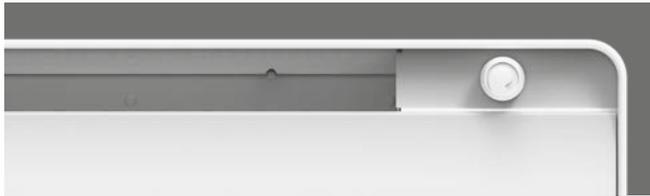

SIBTx - MECHANICAL



ACCESSORIES


PRODUCT	DESCRIPTION	PRICE
SIBTE12C	built-in electronic thermostat – Celsius [120 V-240 V]	80.00
SIBTE13C	built-in electronic thermostat – Celsius [277 V-347 V]	106.00
SIBT1W	built-in single pole thermostat [120 V-600 V]	37.00
SIBT2W	built-in double pole thermostat [120 V-600 V]	44.00
SIBT2TPW	built-in tamper-proof double pole thermostat [120 V-600 V]	63.00
BRE153	built-in electronic low voltage relay [15 A @ 120 V-347 V]	109.00
BRE156	built-in electronic low voltage relay [6 A @ 600 V]	151.00
BRE153T*	built-in electronic low voltage relay c/w transformer 24 V [15 A @ 208 V-347 V]	129.00
BPW	spray paint	57.00

Electronic relays can receive a PWM (pulsed width modulation) or digital (on/off) signal.

* Transformer is supplying 27.5 Vac to thermostat when triac is used at 347 Vac. Here is the voltage supplied by the transformer when triac is used at other voltages:

VOLTAGE TRIAC			
347 Vac	277 Vac	240 Vac	208 Vac
27.5 V	21.2 V	19.0 V	16.5 V

TECHNICAL DRAWINGS

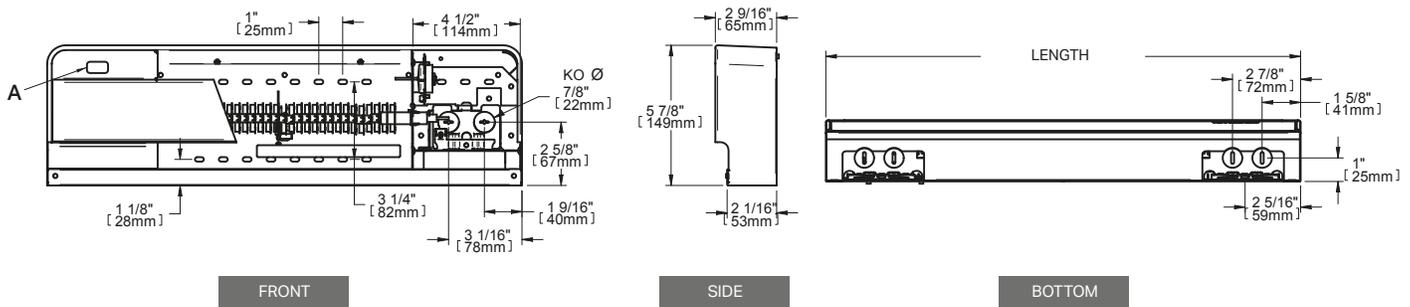

A = LOCATION OF BUILT-IN THERMOSTAT (OPTIONAL)



Stelpro reserves the right to modify at any time the description, manufacturing, or price of its products. Additionally, Stelpro may apply restocking fees or refuse a refund based on one or more of the following criteria: optional color, custom product, assembly with low-demand options. For the latest product information and prices regarding the products, please visit the website www.stelpro.com.